




[Part# IG]

Dual Agent Injector Spray Gun

Ver.2210

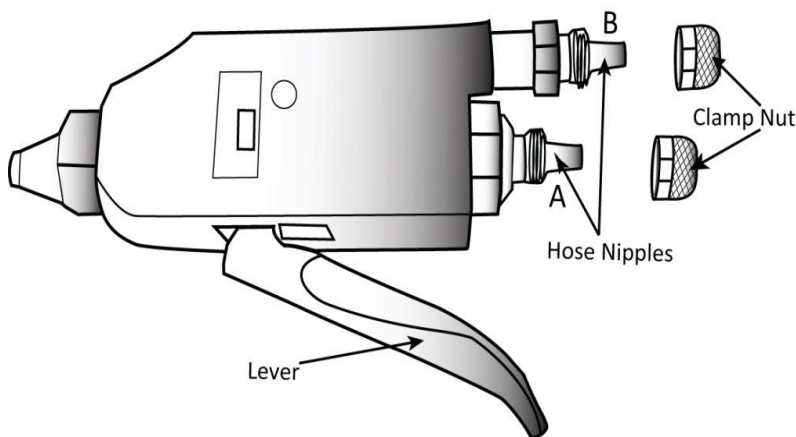

Features & Specifications

- Heavy-Duty Chrome Finished Body
- 2 Clamp Nuts Included
- 9oz. Net Weight
- Made in Korea

HOSE CONNECTION	
HOSE NIPPLE A	Air (Compressed)
HOSE NIPPLE B	Agent

GUN LEVER STAGES	
STAGE 1	Opens A
STAGE 2	Opens A & B

IMPORTANT

Read all the information in the instruction manual before using this product.

Thank you for purchasing the Hot-Steam® IG Dual Agent Injector Spray Gun.

The IG is a spotting gun commonly used with compressed air along with an agent spray tank in a pre-spotting workstation. The air can be used independently or in combination with an agent.

What is required

- A set of two 1/4" OD vinyl tube (not included) to connect the gun.
- A set of two 1/4" hose clamp (not included) to connect and secure the tube to your spotting board.

*** CAUTION ***

Do not attempt to connect the gun into a steam line. This gun is not intended for use with steam at any time.

Installation

1. Remove clamp nut from IG and insert through the 1/4" OD vinyl tube
2. Connect tube to IG hose nipple and hand tighten clamp nut to securely lock tube in place (Tools not required).
3. Follow steps 1 and 2 to connect the second tube.
4. Connect the compressed air supply line to 'Hose Nipple A' and use a 1/4" hose clamp if necessary.
5. Connect the agent supply line to 'Hose Nipple B' and use a 1/4" hose clamp if necessary.

How to Spray

- Press lever 'half way' to spray compressed air only.
- Press lever 'all the way' to spray a mix of air and agent combined.