

## Temperature Dial Replacement

Part# S6017 [Ref. #10]  
Content: 3pcs




### ⚠ WARNING


Before attempting to troubleshoot the iron, turn off and unplug the iron from the power supply. Close the valve on the Water Tank and disconnect the hose from the iron. Wait for the iron to cool down.

### Technical Support Steps

- 1 Match the inside cut-out of the *dial housing* to the *thermostat stem*, install on *outer cover* to lock in place

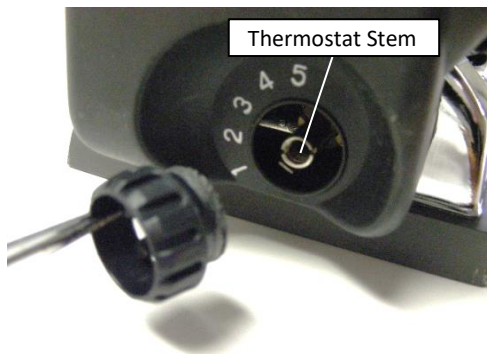

- 2 Insert *dial screw* into the *dial spring* and hold keep them together

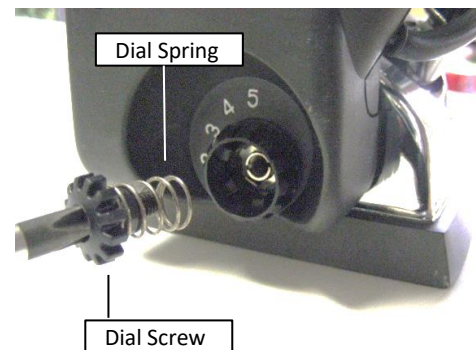

- 3 Place over the *dial housing* and gently tighten with a screwdriver.



- 4 Rotate the *temperature dial* to 0 and up to 5. Regulate the dial tension by loosening or tightening the screw