

DS-KD-KK

Video Intercom Nametag Module



Key Feature

- Dial the resident at one-touch
- Backlight compensation
- Easy and extend

Available Model


DS-KD-KK




Specification

Model		DS-KD-KK
System parameters	Processor	Embedded MCU Processor
	Operation method	Physical Button
Interfaces	Module-connecting	2(1 Input, 1 Output)
	Debug	1
General	Physical button	6
	DIP Switch	8
	Power supply	Powered by DS-KD8003-IME1
	Power consumption	≤2 W
	Working temperature	-40° C to +60° C (-40° F to 140° F)
	Working humidity	10% to 95%
	IP protection level	IP65
	Installation	Flush Mounting, Surface Mounting
Dimensions (L × W × H)	98.21 mm × 100.21 mm × 33.7 mm (3.87" × 3.95" × 1.33")	

Typical Application

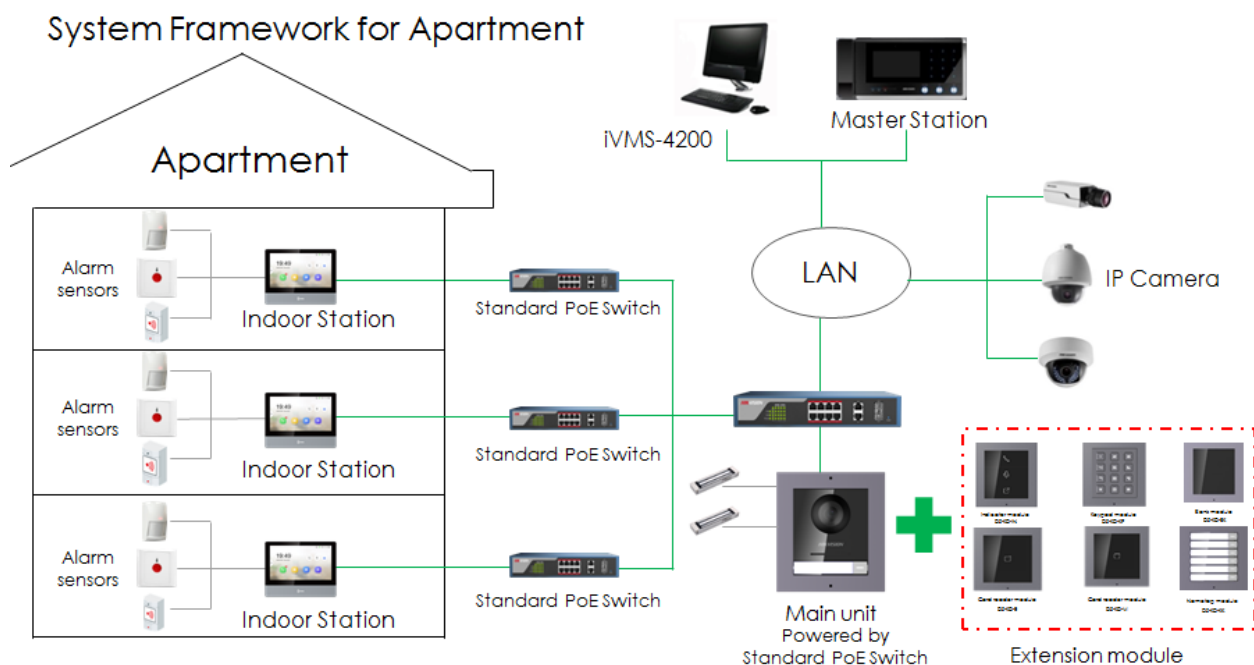

Appearance and Interface

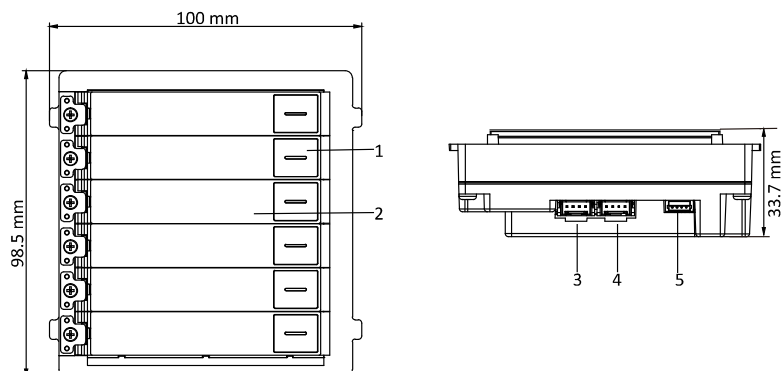

No.	Description
1	Call Button
2	Name Tag
3	Module-connecting Interface(output)
4	Module-connecting Interface(input)
5	Debug