

## **Highline® Comfort Height®**

Two-piece elongated 1.28 gpf chair height toilet **K-3999** 

### **Features**

- Two-piece design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gpf (4.8 lpf).
- Left-hand Polished Chrome trip lever.
- Combination consists of the K-4467 tank and the K-4199 bowl.

### Technology

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.



- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

### **Water Conservation & Rebates**

Eligible for consumer rebates in some municipalities.

### **Recommended Products/Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 Elongated cleansing toilet seat

K-5420 Low-Profile Bolt Caps

K-9379 Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

### **Included Components**

Product consists of:

K-4467 Toilet tank, 1.28 gpf

K-4199 Two-piece elongated chair height toilet bowl

Additional Components:

Bolt cap accessory pack

Tank cover

Trip lever





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


tion
ack™



# **KOHLER**®

## **Highline® Comfort Height®**

Two-piece elongated 1.28 gpf chair height toilet K-3999

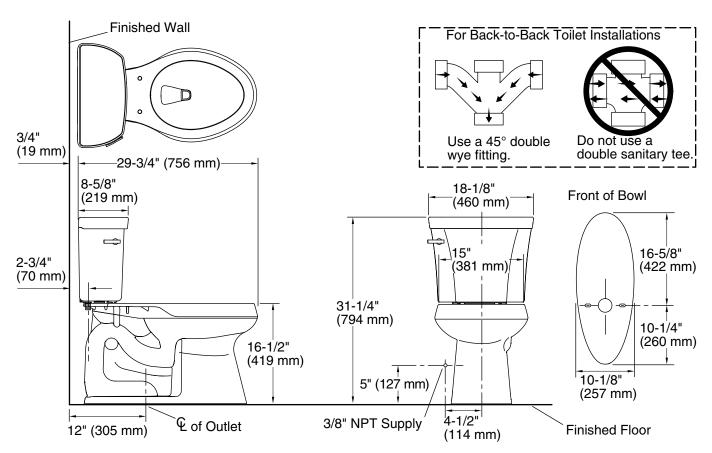

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water 5-3/8" (137 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

