

Forté® Pull-Out Kitchen Sink Faucet K-10433

Features

- Two-function pull-out sprayhead with touch-control allows you to switch from aerated stream to spray.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- ProMotion[®] technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch gooseneck spout offers superior clearance for filling pots and cleaning.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- Available with 10-1/8" (257 mm) swing spout reach.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

• Single- or three-hole installation (escutcheon included).

Adapters, Rough-in and Extension Kits

1012715

Range: 2-1/2" (64 mm) -4-5/8" (117 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

1177879 1.5 GPM [5.7 l/min] Low Flow Kit





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

VS

and a


	•
CP	Polished Chrome
G	Brushed Chrome
BN	Vibrant® Brushed Nickel

Vibrant® Stainless



KOHLER, Faucets

Forté® Pull-Out Kitchen Sink Faucet K-10433

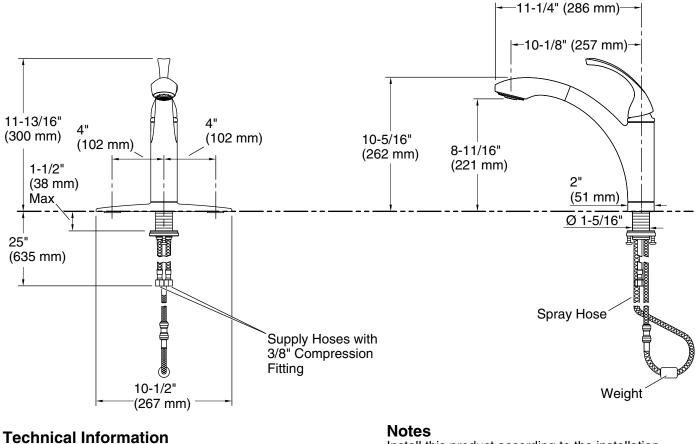

All product dimensions are nominal.

Spout:

Spout reach: 10-1/8" (257 mm)

Install this product according to the installation guide.

Lower flow kit or higher flow kit is available.

Faucet contains all necessary parts for both single-hole and three-hole installations.

The deep roughing-in kit (1012715) is designed for a mounting surface 1-3/8" (35 mm) to 3-3/8" (86 mm) thick. The faucet mounting hole should be between 1-7/16" (37 mm) to 1-1/2" (38 mm) in diameter.

ADA complaint for faucet handles only.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

