

61002

- Includes One 6" Downrod
- Includes Remote Control
- Title 20
- Color Tunable
- Wifi Enabled



61002BK



61002SN



ACCESSORIES (Sold Separately)




FCT6000WT

Wall Control

PRODUCT DESCRIPTION

Taking the standard fan to the next level, Fandelights such as this one house a Wifi-enabled fan within a decorative chandelier frame. This transitional look features a minimalistic frame finished in your choice of Matte Black or Satin Nickel and a downward directed ring of LED illumination. The Wi-Fi enabled functions control the light intensity, color temperature, and speed of the fan. They can be operated by the remote provided or popular Smart Home applications from your phone or other electronic device.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

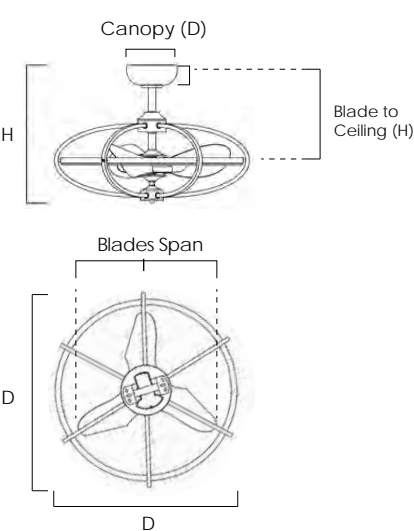

MEASUREMENTS

DIMENSION	: 28" D x 20" H
MAX OAH	: 19.75" OAH
CANOPY	: 7.25" W x 2.75" H x 7.25" L
HANGING WEIGHT	: 15.9 lb
WIRE LENGTH	: 8"

LAMPING

INPUT VOLTAGE	: 120V
LUMENS	: 3,420 Rated (2,220 Del.)
BULB	: 30W LED PCB Intergrated , 30W Total
DIMMABLE	: By Control Provided
CRI	: 80 CRI
COLOR_TEMP	: 2700-4000K

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	: 2440 CFM
ELECTRICITY USE	: 20W
AIRFLOW EFFICIENCY	: 122 CFM / W

FINISHES OPTION

- Black
- Satin Nickel

MATERIAL

Aluminum+Steel+ABS

RATINGS

cETLus
Damp Location

INCLUDES

- Wall Mountable Remote Control
- 1 x 6" Downrod



DOWNROD OPTIONS

- 18" (FRD0118BK, SN)
- 24" (FRD0124BK, SN)
- 30" (FRD0130BK, SN)
- 36" (FRD0136BK, SN)

ADDITIONAL

RATED LIFE: 35,000 Hours
OPERATING TEMPERATURE: -20° C (-4°F), 40°C (104°F)
LIGHTING DIRECTION: Down



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com