

Features

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath.
- Integral lumbar support.
- Slotted overflow allows for deep soaking.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Coordinates with other products in the Archer collection.

Material

Acrylic.

Installation

- Left drain.
- Alcove.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-23726 Drain treatment K-23732 Tub & shower cleaner



ADA

Codes/Standards

CSA B45.5/IAPMO Z124 ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|---------------|
| | 0 | White |
| | 96 | Biscuit |
| | NY | Dune |
| | 95 | Ice™ Grey |
| | G9 | Sandbar |
| | K4 | Cashmere |
| | 58 | Thunder™ Grey |
| | 7 | Black Black™ |










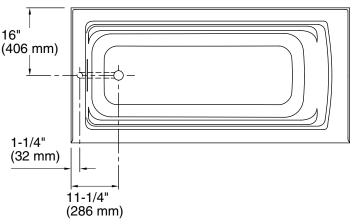

No change in measurements if connected with drain illustrated. (K-7272)



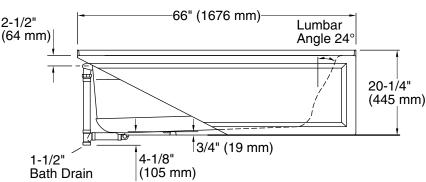



Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location:

50-3/8" x 19-5/8" (1280 mm x 498 mm) Basin area, bottom:

57-5/16" x 24-1/16" (1456 mm x Basin area, top:

611 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 45 lbs/ft2 (219.7 kg/m2) 15-5/16" (389 mm) Water depth:

Water capacity: 66 gal (249.8 L) Minimum flat for 2-3/16" (55 mm)

door:

Notes

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific

requirements of these regulations.

