

Features

- Comfort Depth[®] design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath.
- Integral lumbar support.
- Slotted overflow allows for deep soaking.
- Textured bottom surface.
- Coordinates with other products in the Archer collection.

Material

Acrylic.

Installation

- Reversible drain.
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Drop-in.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain $\ensuremath{\textit{or}}$

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-24916 Wireless Music Kit K-702200-G73 Frameless Sliding Bath Door K-702200-L Frameless Sliding Bath Door K-706000-D3 Frameless Sliding Bath Door K-706003-L Frameless Sliding Bath Door K-706004-D3 Frameless Sliding Bath Door K-706004-L Frameless Sliding Bath Door K-706007-L Frameless Sliding Bath Door K-706007-L Frameless Sliding Bath Door K-23726 Drain treatment K-23732 Tub & shower cleaner



Archer®

K-1123

60" x 32" drop-in bath

ADA

Codes/Standards

CSA B45.5/IAPMO Z124 ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0	White
96	Biscuit
NY	Dune
95	lce™ Grey
G9	Sandbar
K4	Cashmere

- 58 Thunder™ Grey
 - 7 Black Black™





Archer® 60" x 32" drop-in bath K-1123

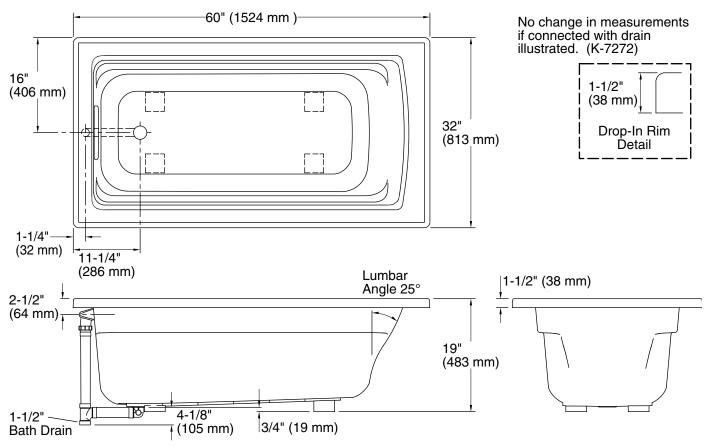

Technical Information

All product dimensions are nominal.			
Installation:	Drop-in		
Drain location:	End		
Basin area, bottom:	45-1/8" x 19-11/16" (1146 mm x 500 mm)		
Basin area, top:	52-3/4" x 25-5/16" (1340 mm x 643 mm)		
Weight:	70 lbs (31.8 kg)		
Minimum floor load:	44 lbs/ft² (214.8 kg/m²)		
Water depth:	15" (381 mm)		
Water capacity:	58 gal (219.6 L)		
Cutout:	Drop-in, 58-1/2" x 30-1/2" (1486 mm x 775 mm)		
Minimum flat for door:	2-3/16" (56 mm)		

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

