



# 1.75 gpm single-function showerhead **K-72774-G**

#### **Features**

- Optimized sprayface for maximum performance.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- ½" NPT connection.
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar).
- Single function showerhead with 48 nozzle 6" (152 mm) diameter sprayface.
- Coordinates with other products in the Artifacts collection.

#### **Technology**

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray.

#### Installation

- Wall-mount.
- Shower arm and flange sold separately.

#### **Water Conservation & Rebates**

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

#### **Recommended Products/Accessories**

K-72775 Shower Arm and Flange K-23723 Faucet cleaner





#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	2MB	Vibrant® Brushed Moderne Brass
	VNT	Vintage Nickel




### **KOHLER**, Faucets

### **Artifacts®**

# 1.75 gpm single-function showerhead **K-72774-G**

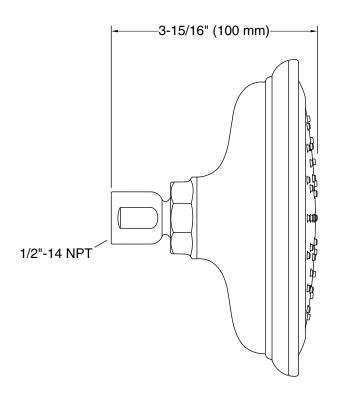

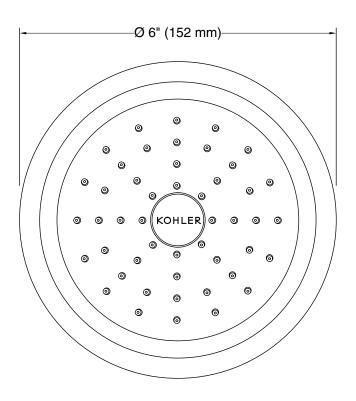

#### **Technical Information**

All product dimensions are nominal.

#### **Showerhead/Body Spray:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 80 psi (5.5 bar)

#### **Notes**

For use with automatic compensating valves rated at 1.4 gal/min (5.3 l/min) or less. Install this product according to the installation instructions.

