

Features

- Wristblade lever handles.
- Valvet® valves.
- Intended for shelf-back installations.
- 3-3/8 (86 mm) gooseneck spout reach.
- Stationary spout.
- For 5-1/2" (140 mm) centers.
- Less drain.
- 2.2 gal/min (8.3 l/min) maximum flow rate [max at 60 psi.

Material

- Brass.
- Brass valve bodies.

Recommended Products/Accessories

K-23726 Drain treatment
K-23723 Faucet cleaner



ADA CSA B651 OBC

Codes/Standards

NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

■ CP Polished Chrome

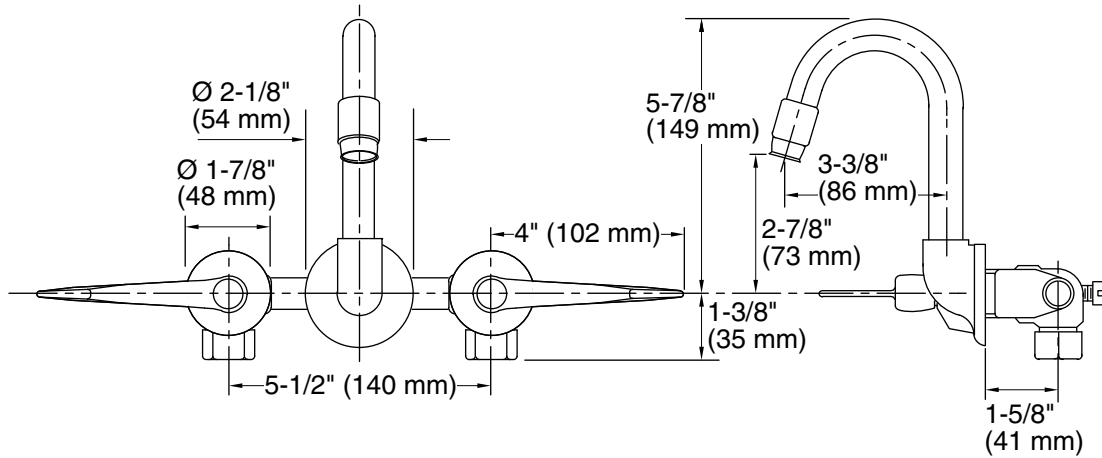

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 3-3/8" (86 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.