Components®



Bathroom sink spout with Ribbon design K-77966

Features

- 6-11/16" (170 mm) spout reach.
- Tall height is ideal for vessel-style sinks.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- Laminar flow controls deliver a graceful stream while conserving water.
- Includes metal touch-activated drain with 1-1/4" tailpiece.
- Coordinate with your choice of Components bathroom sink faucet handles for a personalized design.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Widespread or remote valve.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Required Products/Accessories

K-77974-4 bathroom sink handles with Lever design

- or
 - K-77974-8 bathroom sink handles with Oyl design
- or
 - K-77974-9 bathroom sink handles with Industrial design

or

K-77963-8A bathroom sink rocker handle

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description




- CP Polished Chrome
- BN Vibrant® Brushed Nickel
- BL Matte Black
- 2MB Vibrant® Brushed Moderne Brass



Components®

KOHLER, Faucets

Bathroom sink spout with Ribbon design K-77966

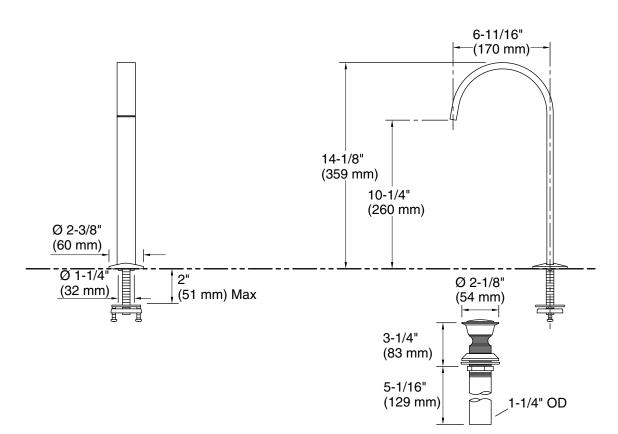

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Yes

Pressure:

Drain included:

Spout:

Spout reach:

6-11/16" (170 mm)

60 psi (4.1 bar)

Notes

Install this product according to the installation instructions.

