

Parallel™

Rite-Temp® shower valve trim K-TS23501-4

Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Antiscald protection.
- Single handle controls both on/off activation and temperature settings.
- Coordinates with other products in the Parallel collection.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

 Trim only; requires valve to complete installation (sold separately).

Required Products/Accessories

K-8304-K Valve Body & Cartridge Kit Complete

or

K-8304-KS Valve Body & Cartridge Kit Complete

or

K-8304-PS Valve Body & Cartridge Kit Complete

or

K-8304-PX Valve Body & Cartridge Kit Complete

or

K-8304-US Valve Body & Cartridge Kit Complete

or

K-8304-UX Valve Body & Cartridge Kit Complete K-P8304-K Valve body and cartridge kit complete

or or

K-P8304-KS Valve Body & Cartridge Kit Complete

or

K-P8304-SWX Valve Body & Cartridge Kit Complete

or

K-8300-K Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-KS Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-PX Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-PS Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-P8300-K Valve Body Rough-In

K-P8305 Pressure Balance Cartridge

or

K-P8300-KS Valve Body Rough-In

1-800-4KOHLER (1-800-456-4537)



ADA CSA B651 OB

Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black





Parallel™ Rite-Temp® shower valve trim K-TS23501-4

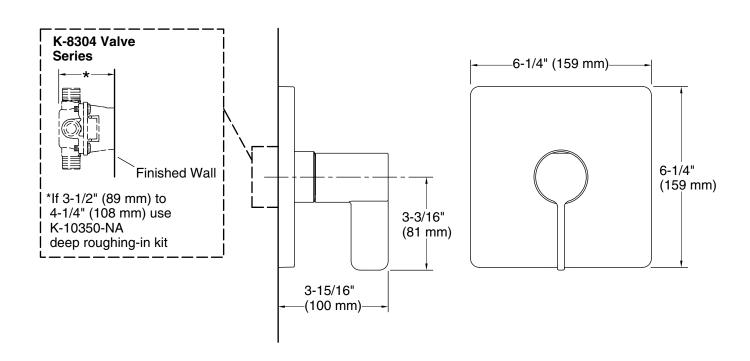

Technical Information

All product dimensions are nominal.

Valve body: Machined-brass

Drain included: No

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

