

### Features

- 0.5 gpm (1.9 lpm) maximum flow rate.
- Factory-set 30-second maximum continual run cycle.
- Vandal-resistant aerator.
- 24" (610 mm) flexible supply hose for easy installation.
- 6-3/16" (157 mm) spout reach.
- Less temperature mixer.
- Less drain.

### Material

- Brass.

### Technology

- Includes two AAA batteries.
- Electronic Insight™ sensor technology for accurate and consistent activation.

### Installation

- Single-hole mounting.
- Above-counter battery and valve for easy installation and maintenance.

### Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

### Optional Products/Accessories

1160593 .35 gpm Aerator, Small

1139286 Small Aerated 1.0 gpm (3.8 l/min)

1139287 Small Laminar 1.0 gpm (3.8 l/min)

1053576 Small Aerated 1.5 gpm (5.7 l/min)

1053532 Small Laminar 1.5 gpm (5.7 l/min)

78783 Sealing Washer

1075440 Small Spray 0.5 gpm (1.9 l/min)



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*


#### Color Code Description



CP Polished Chrome



VS Vibrant® Stainless

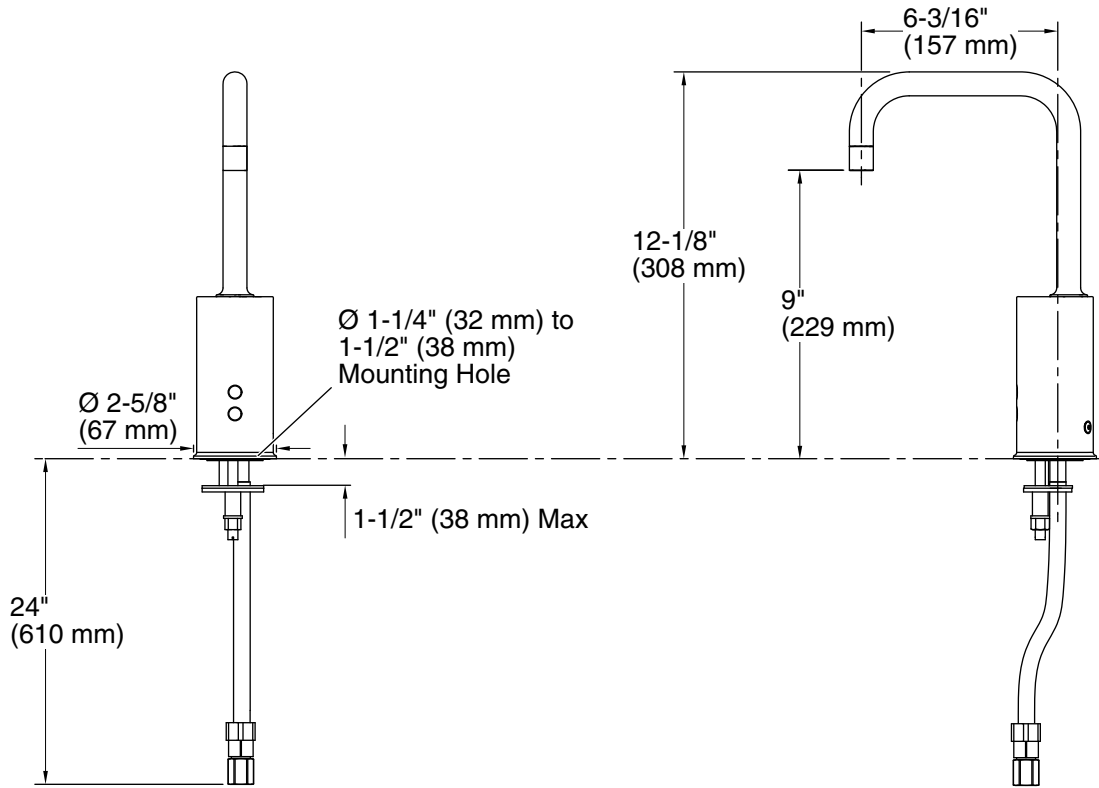

### Technical Information

All product dimensions are nominal.

Power source: Battery - DC, included

### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Machined-brass

### Notes

Install this product according to the installation guide.

A  $1\text{-}1/4"$  (32 mm) minimum to  $1\text{-}1/2"$  (38 mm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be  $1\text{-}3/4"$  (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be  $1\text{-}3/4"$  (44 mm).

The maximum height of the lip basin should be  $3/4"$  (19 mm).

Product includes rosebud spray aerator. Other aerator styles are available.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.