

Features

- 0.5 gpm (1.9 lpm) maximum flow rate.
- Factory-set 30-second maximum continual run cycle.
- Vandal-resistant aerator.
- 24" (610 mm) flexible supply hose for easy installation.
- 6-3/16" (157 mm) spout reach.
- Less temperature mixer.
- Less drain.

Material

- Brass.

Technology

- Includes 3.6 volt Hybrid Energy Cell.
- Electronic Insight™ sensor technology for accurate and consistent activation.

Installation

- Single-hole mounting.
- Above-counter valve for easy installation and maintenance.

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-99799 Thermostatic Tempering Valve
1160593 .35 gpm Aerator, Small
1139286 Small Aerated 1.0 gpm (3.8 l/min)
1139287 Small Laminar 1.0 gpm (3.8 l/min)
1053576 Small Aerated 1.5 gpm (5.7 l/min)
1053532 Small Laminar 1.5 gpm (5.7 l/min)
K-7129 Drain
K-7129-A Drain
K-13478-A 4" escutcheon plate for Insight™ and Kinesis® faucet
K-13478-B 4" escutcheon plate for Insight™ and Kinesis® faucet
K-13479-A 8" escutcheon plate for Insight™ and Kinesis® faucet
K-13479-B 8" escutcheon plate for Insight™ and Kinesis® faucet



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
---	----	-----------------

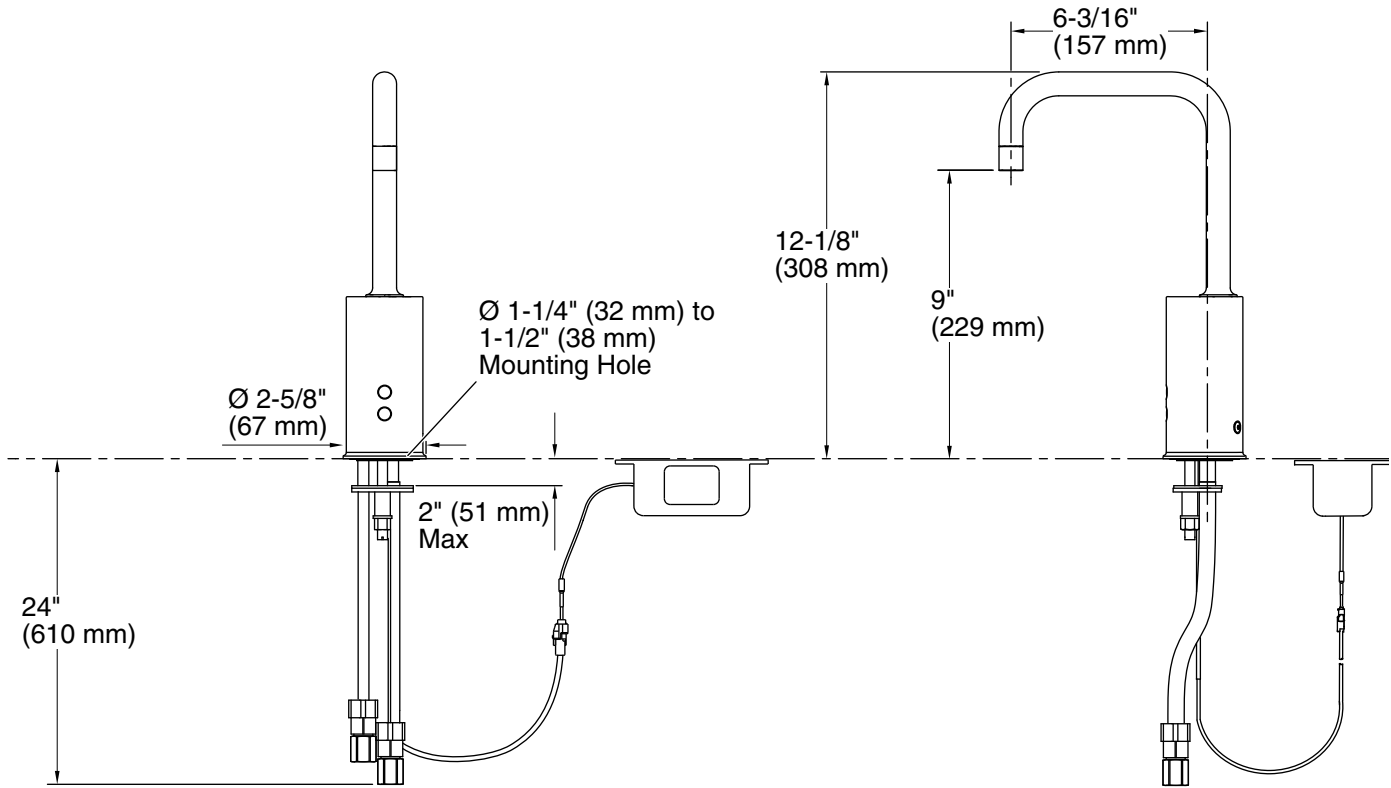

Technical Information

All product dimensions are nominal.

Power source: Hybrid Energy Cell, included

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Valve body: Machined-brass

Drain included: No

Notes

Install this product according to the installation guide.

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).

The maximum height of the lip basin should be 3/4" (19 mm).

Product includes rosebud spray aerator. Other aerator styles are available.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.