



eSafety Supplies

Trolley Bays



TB 1S 40



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 900mm

Height: 850mm

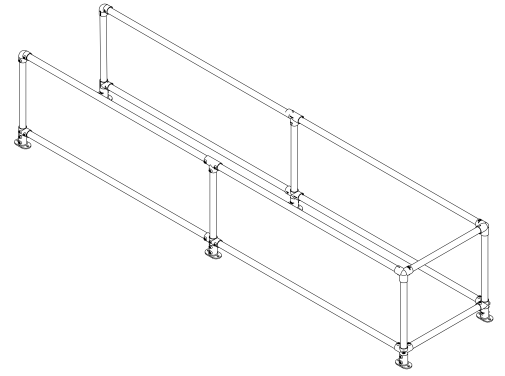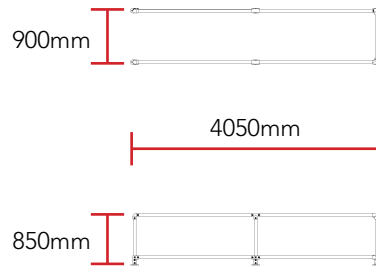

TB 1S 44



OVERALL DIMENSIONS

(Approximate)

Length: 4450mm

Width: 900mm

Height: 850mm

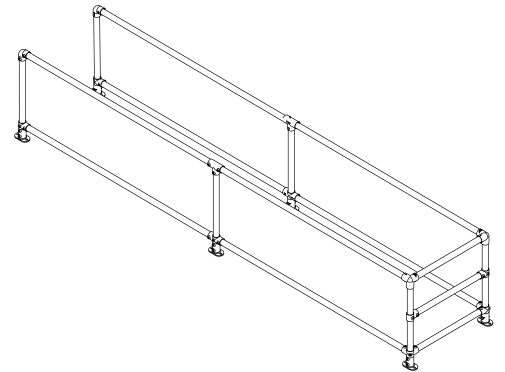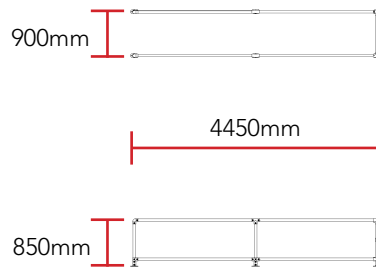

TB 1S 53



OVERALL DIMENSIONS

(Approximate)

Length: 5300mm

Width: 900mm

Height: 850mm

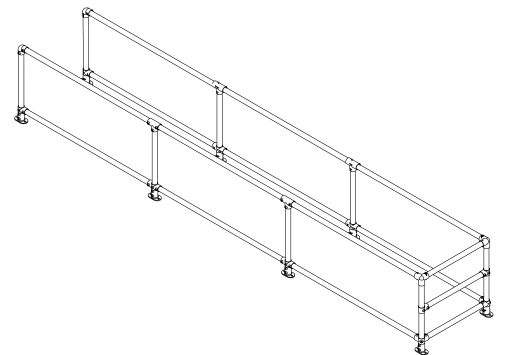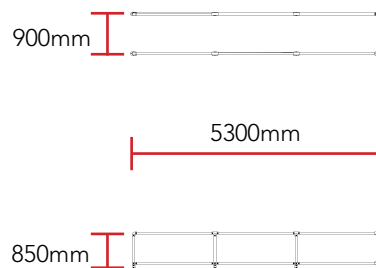

TB 1S 40 SP



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 900mm

Height: 1950mm

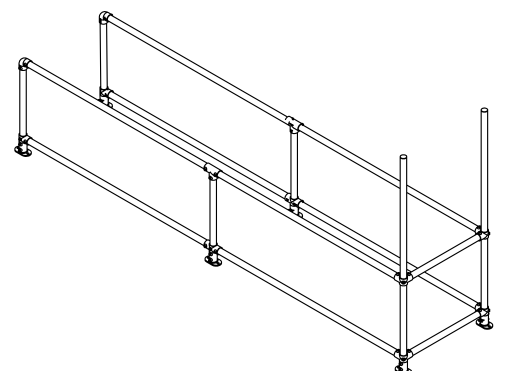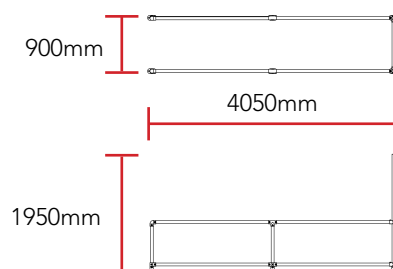

TB 2S 40



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 1750mm

Height: 850mm

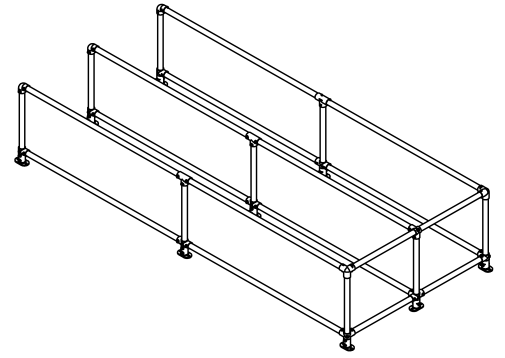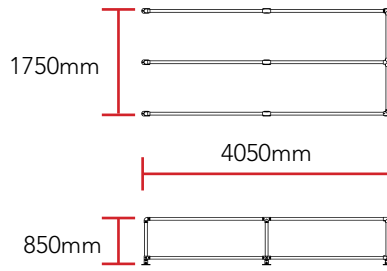

TB 2S 44



OVERALL DIMENSIONS

(Approximate)

Length: 4450mm

Width: 1750mm

Height: 850mm

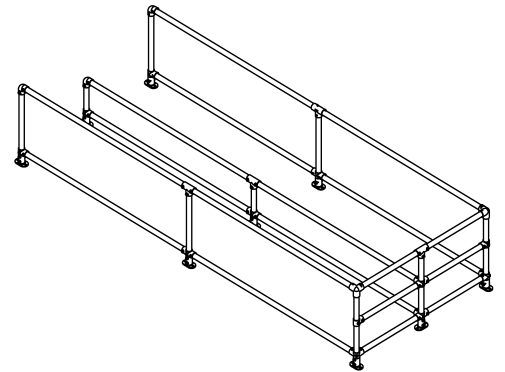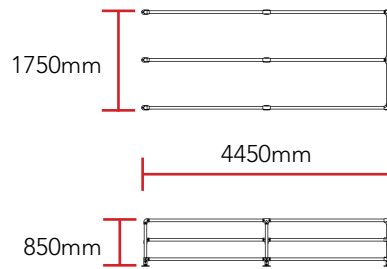

TB 2S 53



OVERALL DIMENSIONS

(Approximate)

Length: 5300mm

Width: 1750mm

Height: 850mm

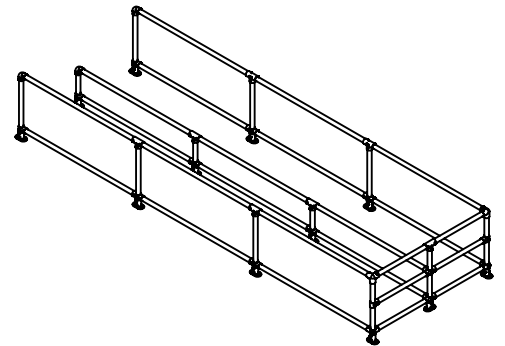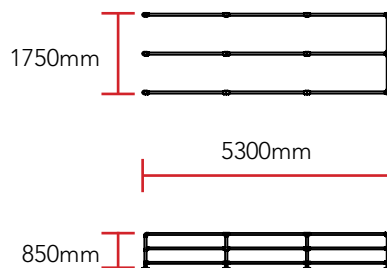

TB 2S 40 SP



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 1750mm

Height: 1950mm

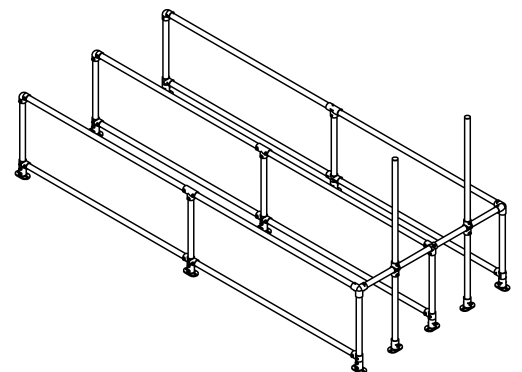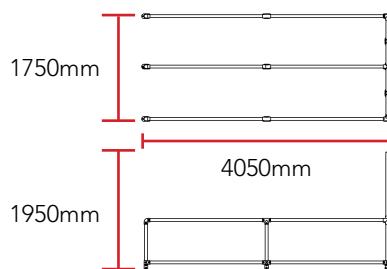

TB 3S 40



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 2600mm

Height: 850mm

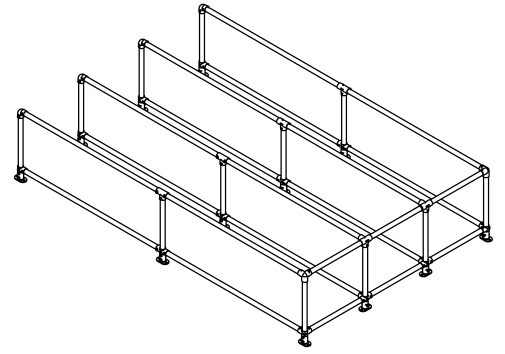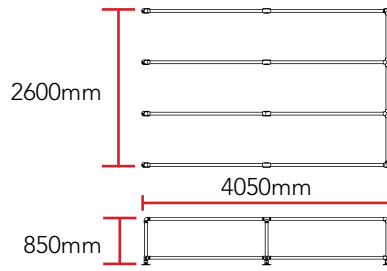

TB 3S 44



OVERALL DIMENSIONS

(Approximate)

Length: 4450mm

Width: 2600mm

Height: 850mm

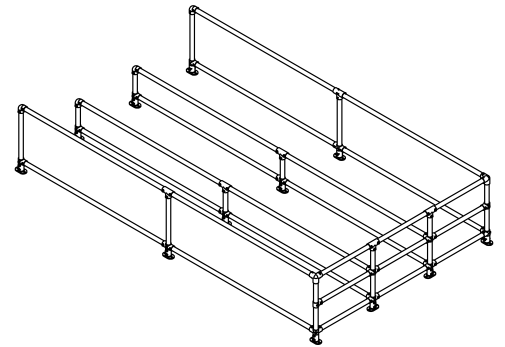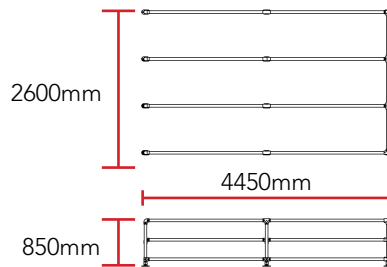

TB 3S 53



OVERALL DIMENSIONS

(Approximate)

Length: 5300mm

Width: 2600mm

Height: 850mm

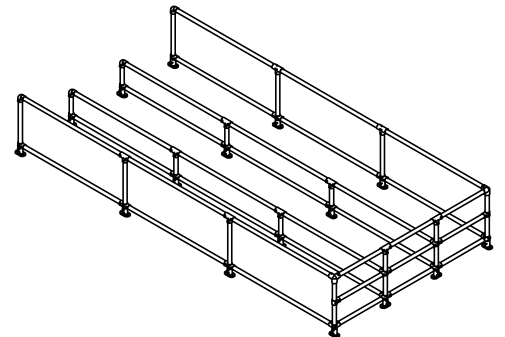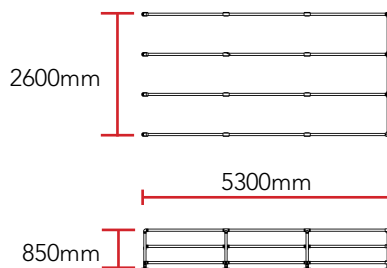

TB 3S 40 SP



OVERALL DIMENSIONS

(Approximate)

Length: 4050mm

Width: 2600mm

Height: 1950mm

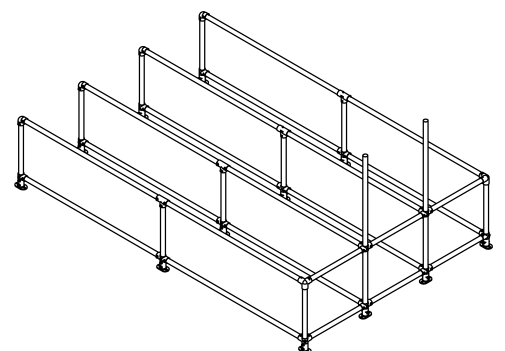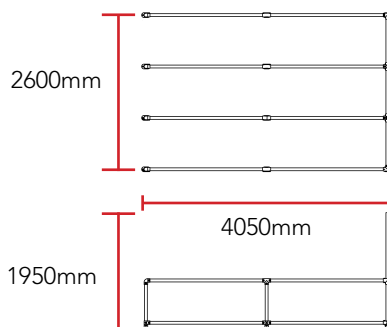

TB 1D 88



OVERALL DIMENSIONS

(Approximate)

Length: 8870mm

Width: 900mm

Height: 850mm

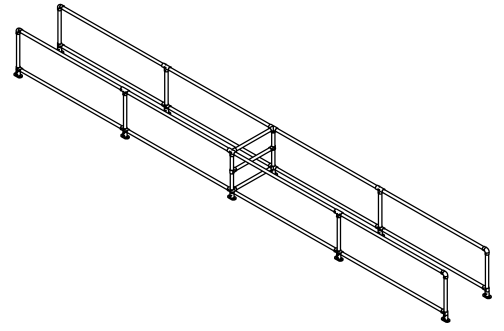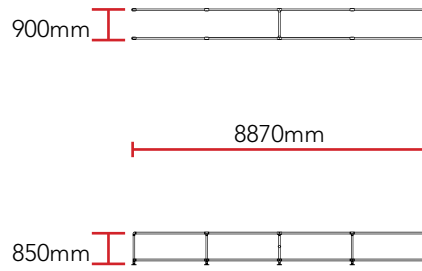

TB 1D 108



OVERALL DIMENSIONS

(Approximate)

Length: 10600mm

Width: 900mm

Height: 850mm

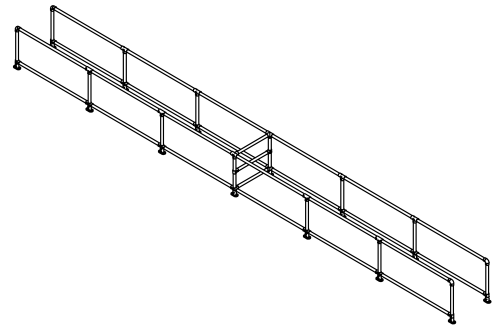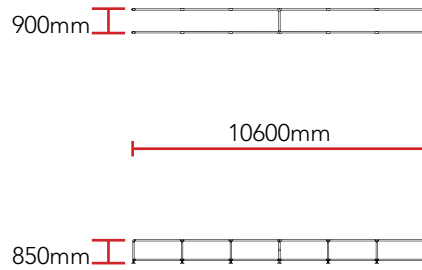

TB 2D 88



OVERALL DIMENSIONS

(Approximate)

Length: 10600mm

Width: 1750mm

Height: 850mm

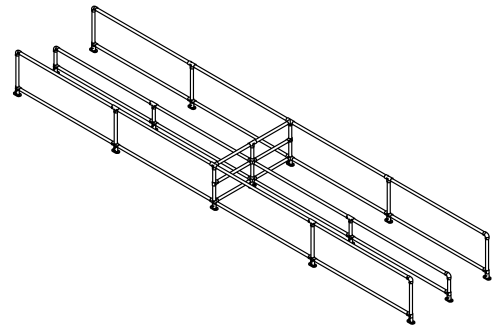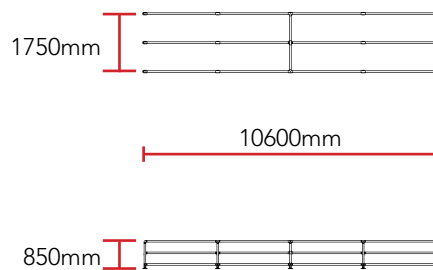

TB 2D 108



OVERALL DIMENSIONS

(Approximate)

Length: 10600mm

Width: 1750mm

Height: 850mm

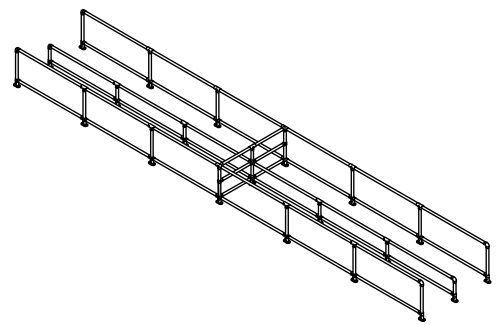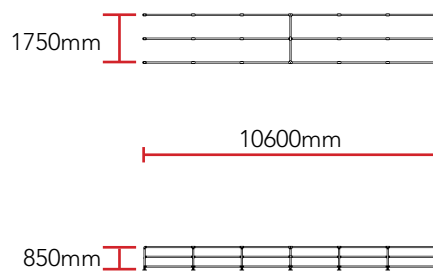

TB 1D 88 SP



OVERALL DIMENSIONS

(Approximate)

Length: 10600mm

Width: 900mm

Height: 1950mm

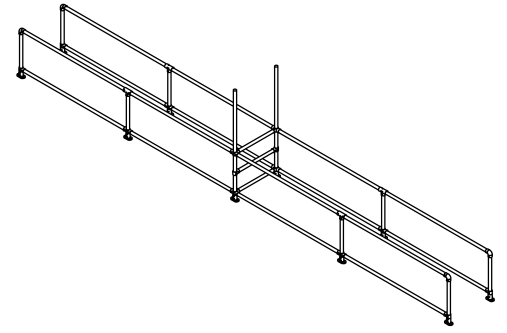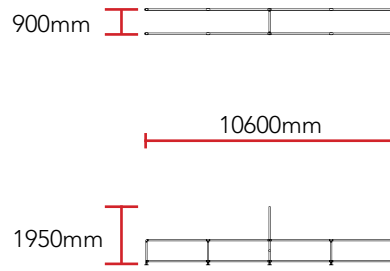

TB 2D 88 SP



OVERALL DIMENSIONS

(Approximate)

Length: 10600mm

Width: 1750mm

Height: 1950mm

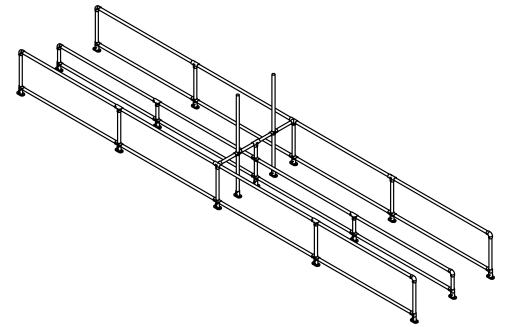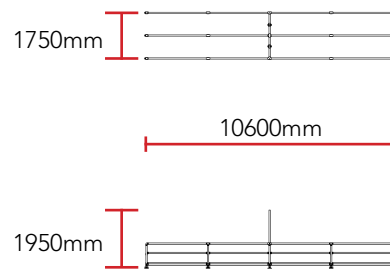

TB 4S 88



OVERALL DIMENSIONS

(Approximate)

Length: 8850mm

Width: 3450mm

Height: 850mm

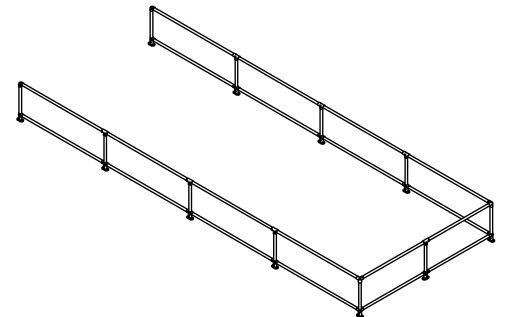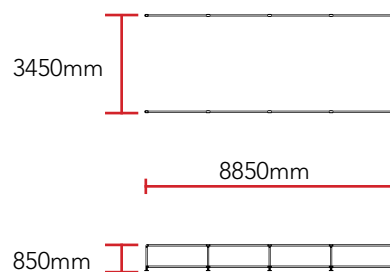

TB 6S 88



OVERALL DIMENSIONS

(Approximate)

Length: 8850mm

Width: 5150mm

Height: 850mm

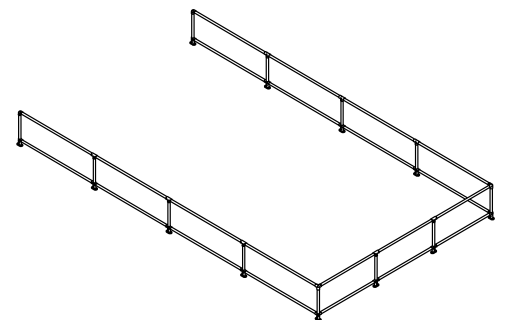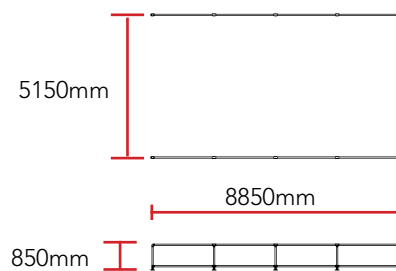

Key Features

- Weld-less Connections
- Modular
- Reduced Corrosion
- Colour Options

Applications suited to

- Shopping centres
- Warehouses
- Carparks
- Sports & recreation centres

Dimensions

Dimensions vary depending on design used, lengths range from 4.0m to 8.8m each end.

Customized dimensions available

Stanchions

Tube 48.3mm OD
Thickness 3.2mm

Rails

Tube 48.3mm OD

Inspection & Maintenance

Visual inspection for any damage or loose fixings must be done periodically and prior to use. Basic wear and tear preventative maintenance is recommended, as per manufacturer's specifications and recommendations.

Optional Extras (Available for all models)

Sign posts
Trolley stopper
Powder coating

TUBE

MATERIAL:	Galvanised Steel pipe
COMPLIANCE:	AS/NZS 1163
FINISH:	Hot Dipped Galvanised coating has a minimum zinc mass of 300g/m ²
LENGTH:	Up to 6.5m.

FITTINGS

MATERIAL:	Fittings cast of malleable cast iron - galvanized finish ASTM A197 Cast iron fittings or casting to comply with AS 1832 (ISO 5922) Hot Dipped Galvanized finish to comply with AS 4680
SET SCREW:	Cup Point Case hardened setscrew in 45CR Alloy Steel (alternative* Stainless Steel 308) Size C42, D48, E60 using 3/8" ISO 228 with 5/16" (8mm) hex key
FEATURE:	No Welding Slip on Structural Fittings
TENSILE LOAD:	Min 5,650 N axial load subjected to 40Nm tightened torque (FOS 2.0 min)
TESTING:	Internally by Solid Dynamics Engineering Pty Ltd. Testing videos are available upon request.
DESIGN:	Tubeclamp Structural Fittings, when properly installed per manufacturing recommendations, meet or exceed all applicable requirements as specified by Australian Standards.
COMPLIANCE:	Designed and manufactured in accordance with Australian Standard AS 1657:2018 and relevant statutory WHS Codes of Practice/Guidelines. Galvanized to AS 4792 and AS/NZS 4680:2006 (where applicable).



Contact us



1300 291 700



sales@esafetysupplies.com.au



37 Bentley St, Wetherill Park
NSW 2164