

GNB SERIES Outdoor Lighting

GNB-25W-MCT-BR-P
LED GOOSENECK BARN LIGHT



WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

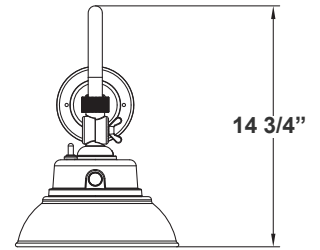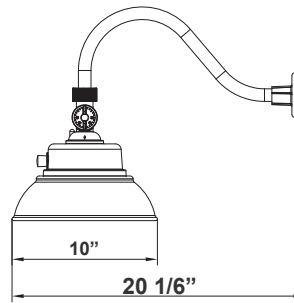

10"(W) x 14 3/4"(H) x 20 1/6" (D)

The Dusk to Dawn Gooseneck Light is perfect for many general-purpose outdoor applications. All fixtures are installed with a DC Button photocell.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT, Switch is on bottom of Fixture

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 25W
- Power Factor: >0.90
- Efficacy: 120 LPW
- THD: <20%

Mechanical:

- Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- Lens: High light Transmittance PC, Anti-UV and Fire Resistant
- DC Bottom Photocell Included
- Operating Temperature: -40°F to 104°F
- IP54, Wet Location
- 7-Year Warranty

Lighting:

- Dimming: 0-10V Dimming
- Total Lumens: 3000LM
- Multi CCT, Switch is on bottom of Fixture
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 103.5°
- Rated life: 70,000 Hrs

Applications:

- Farms/Barns, Storage Sheds, Entryways/Pathways, Industrial Yards, Security, Building Perimeters, Area Lighting

Other Models:

- 25W | 3000LM | GNB-25W-MCT-WH-P





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-07192022

Photometrics: GNB-25W-MCT-BR-P

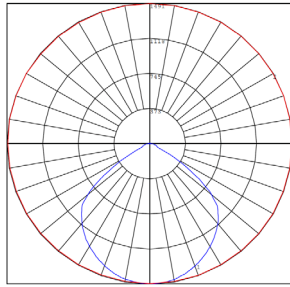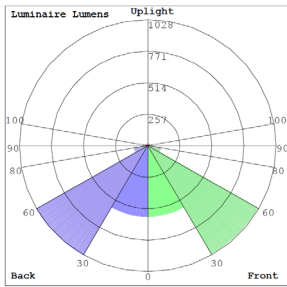

BUG Rating: B2-U2-G1

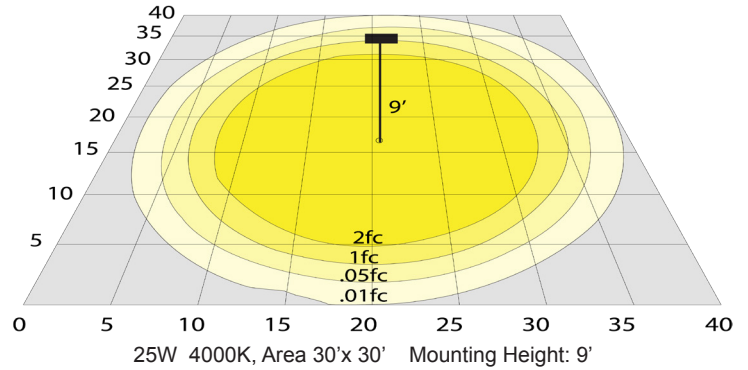

Other Views:



Side View



Lens View



Back View

Performance Table: GNB-25W-MCT-BR-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GNB-25W-MCT-BR-P	25W	120-277V	3000LM	3000K/4000K/5000K	B2-U2-G1	120

Sample Ordering

Model	Wattage	Color Temp.	Finish	Photocell				
GNB	-	25W	-	MCT	-	BR	-	P

Example:

1. GNB-25W-MCT-BR-P

(FOR 25W MCT FIXTURE 120-277V)

