

Version	1.0	Date	1/23/25
Prepared By	JC		

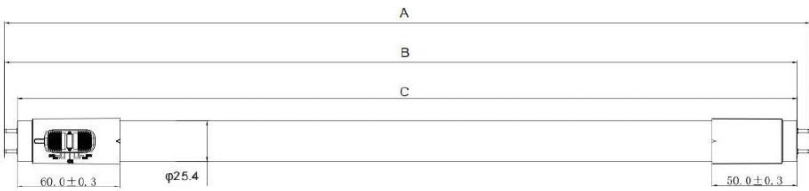
PRODUCT SPECIFICATION			
Category	Tube Type A + B	PICTURE 	
Item Number	4658		
Stock Code	LED8T8/24FR10/8CCT5/AB/UNV		
Base	G13 Socket (Single + Double Ended)		
Housing Color	White + Inner Coated Glass		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	8	Replacement Wattage (W)	17W / 24T8
Tested Wattage (W)	8		
Input Voltage (V)	120-277V or FL Ballast		
Voltage Frequency (Hz)	50/60	Surge Protect Level	1KV
Input Current (A)	0.74	Dimmable	Yes*
Power Factor	>0.9	*With Dimming Module or Phase-Cut Triac Dimmers	
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,000	CCT (K)	3CCT (30/35/40/50/65K)
Efficacy (lm/w)	125	Beam Angle (°)	325°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 113°
Storage Temperature (°F)	-4°F ~ 140°
IP Rating	IP20
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10568	BALED-100W-T8AB-DIM-MV	0-10V Dimming Module

PRODUCT DIMENSIONS			
Diameter- in / (mm)	1" / 25.4		
Length A- in / (mm)	23.73" / 602.8		
Length B- in / (mm)	23.45" / 595.7		
Length C- in / (mm)	23.17 / 588.6		
Weight (lbs)	0.287 (130g)		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL / cUL	CEC	
NSF	✓	JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	
Ballast List	✓		

COMMENTS
*Check for ballast compatibility