




KD 350 D - KD 350 PS


MITER SAW MACHINE
DERECELİ KESME MAKİNESİ

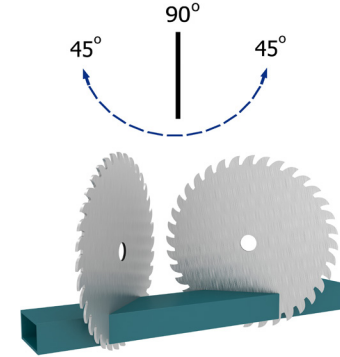


45° : 100 x 115 mm









90° : 150 x 115 mm



45° : 125 x 100 mm



90° : 180 x 100 mm

							
				Bar	Air Cons.		
KD 350 D	2.2 kW-3 400V 50-60 Hz.	D: Ø350 mm d: Ø30-32 mm	2.900 RPM	-	-	72x76x157	123 134
KD 350 PS	2.2 kW-3 400V 50-60 Hz.	D: Ø350 mm d: Ø30-32 mm	2.900 RPM	6-8	7 L/min.	72x76x157	123 134

GENERAL FEATURES

- Location points at 45° - 30° - 22.5° - 15° - 0° both left and right
- Pivoting range from 45° left to 45° right infinitely adjustable
- Aluminium construction of body and machine stand made of steel sheet
- Robust mechanical construction enables the ease of adjustment for the requested cutting angles
- Strong spring system and protective shield

STANDARD ACCESSORIES

- Ø350 mm saw blade
- Machine stand
- 2x manual horizontal clamps (KD 350 D)
- 2x pneumatic horizontal clamps (KD 350 PS)
- Air gun (KD 350 PS)
- Saw blade cooling system (KD 350 PS)

OPTIONAL ACCESSORIES

- MKN 300 roller conveyor (3m)
- Brake unit working with motor stop button
- Spare Ø350 mm saw blade
- 2x vertical clamps (KD 350 PS)

GENEL ÖZELLİKLER

- 45° - 30° - 22.5° - 15° - 0° açılarda sağ ve sol yönde susta ile kesim
- 45° sol - 45° sağ ara derecelerde hassas kesim
- Alüminyumdan imal edilmiş makine gövdesi ve çelik sacdan üretilmiş makine sehpası
- İstenilen açılara kolay ayarlanabilir mekanik altyapı
- Sağlam yay sistemi ve koruyucu siper

STANDART AKSESUARLAR

- Ø350 mm testere
- Makine sehpası
- 2x manuel yatay mengene (KD 350 D)
- 2x pnömatik yatay mengene (KD 350 PS)
- Hava tabancası (KD 350 PS)
- Testere soğutma sistemi (KD 350 PS)

OPSİYONEL AKSESUARLAR

- MKN 300 konveyör (3m)
- Motor stop butonu ile çalışan frenleme tertibatı
- Yedek Ø350 mm testere
- 2x dikey mengene (KD 350 PS)

