

Manual Edge Banding Machine MF80S

Nanxing Machinery
Guangdong China



Find more: www.nanxingmac.com
Follow us: Nanxing Machinery



Description

- Friendly for curved and straight edge banding
- Teflon coated glue pot is easy to clean and with temperature control
- Steel table plate of high stiffness and flatness, long service life



Details

1. Machine body

- Professional CNC metal processing machines are used to process the body and components to make sure perfect quality and detail.
- More than 20 years experience ensures stability and performance




2. Table plate

- Thick Steel table plate of high flatness and longer service life, avoid scrap on board's surface
- Front table is 45 degree adjustable is designed for inclined edge banding.




3. Table presser

- Tape presser rollers are movable to suit different shape edge..

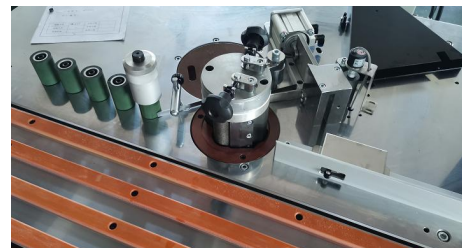

4. 2 gluing rollers


- 2 gluing rollers are designed for straight edge and free-shaped edge

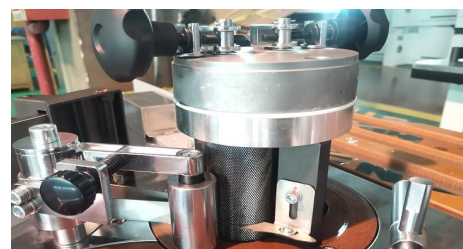




5. Tape cut

- Cut tape after stepping on foot pedal switch

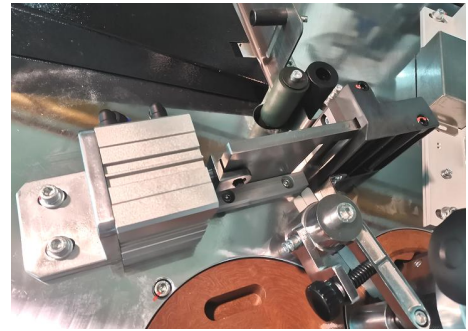

6. Glue pot

- Teflon coated glue pot of larger capacity
- The glue pot cover is adiabatic and with glass to watch remained glue volume;

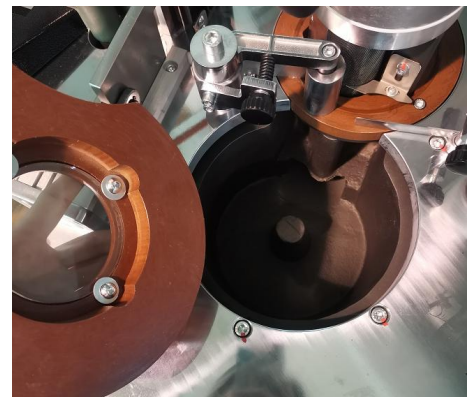

Technical Data

Edge Tape Width	10-80mm
Edge Tape Thickness	0.3-3mm
Minimum radius of surface	20mm
Feeding Speed	1-18m/min
Heating Power	2.2kw
Motor power	0.2kw
Total power	2.5 kW
Overall dimension	1800 *1120*1150mm
Net weight	310kg

**Thanks for the attention!*

The company continuous to improve the product specifications and design details, the specifications are subject to change without notice. 220712