




Installation Instructions of Handleset

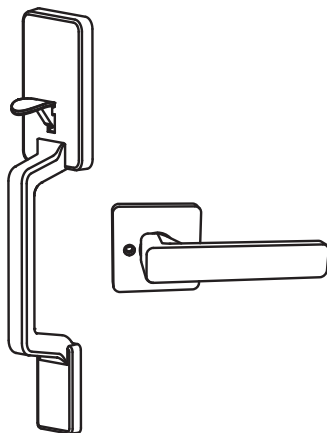

All pictures in this manual are for illustration purpose only.
Actual product may vary due to product upgrade.

Need Help? Contact Us!

Please contact us if you have any questions at

 **+1 (833) 878-3346**

(Monday-Friday 9:00 am-5:00 pm PST)



support@teeheo.com  **teeheo.com**




CONTENT

- Parts List 01
- Prepare the Door & Check Dimensions 03
- Adjust Latch Backset 04
- Install the Latch & Strike 05
- Install the Handleset 06
- Test the Handleset 07




PARTS LIST

A Handle x1




B Latch x1




C Strike x1



D Dust Cover x1
(optional)



E Handle Lever x1



F Handle Lever &
Handle Screws x3



G Latch & Strike
Screws x4



H Spacer x1




TOOL REQUIRED



Do not use an electric screwdriver
during installation.



Installation Overview


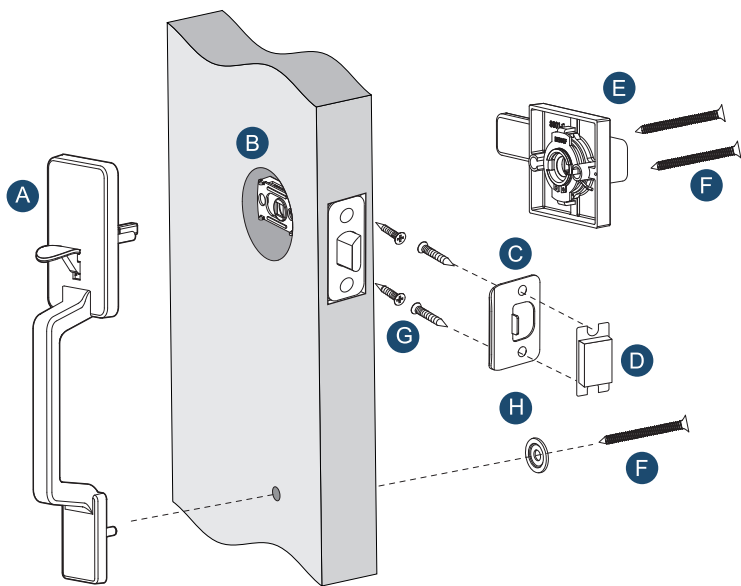




INSTALLATION GUIDE

Step 1: Prepare the Door & Check Dimensions


If your door already has the holes shown in the picture below, proceed to the next step; if your door does not have holes, use the mounting template to drill a new hole.

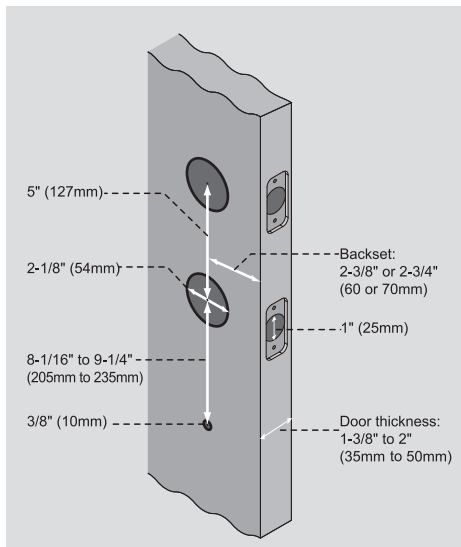


Step 2: Adjust Latch Backset

Backset is the distance from the door edge to the center of the hole in the door.


Note: Be sure to use the provided Latch from the package, or it will not function properly.



A. If the backset of your door is 2-3/8" (60mm), there is no need to adjust the Latch.




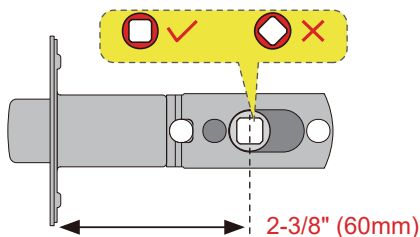


B. If the backset of your door is 2-3/4" (70mm), please adjust the Latch.

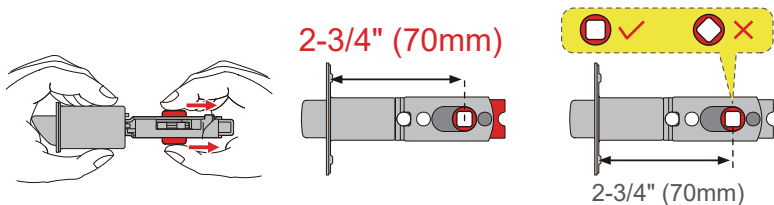


Step 3: Install the Latch & Strike

Install the Latch



Install the Strike

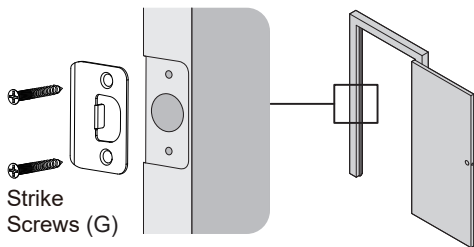


Strike
Screws (G)

Note:

The bevel of the Latch should be aligned with the bevel of the Strike.



Opening outwards



Opening inwards





Step 4: Install the Handleset

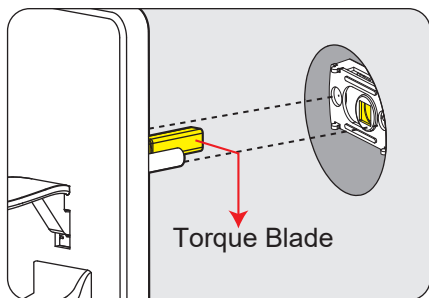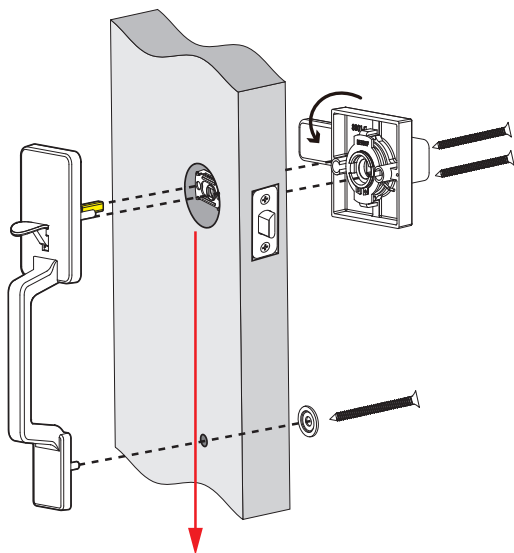

IMPORTANT:

The Torque Blade must be rotated to align with the square hole.




Step 5: Test the Handleset

Keep the door open and check the Handleset to ensure it works smoothly.



IMPORTANT:

Don't press the button during the installation of the handle.

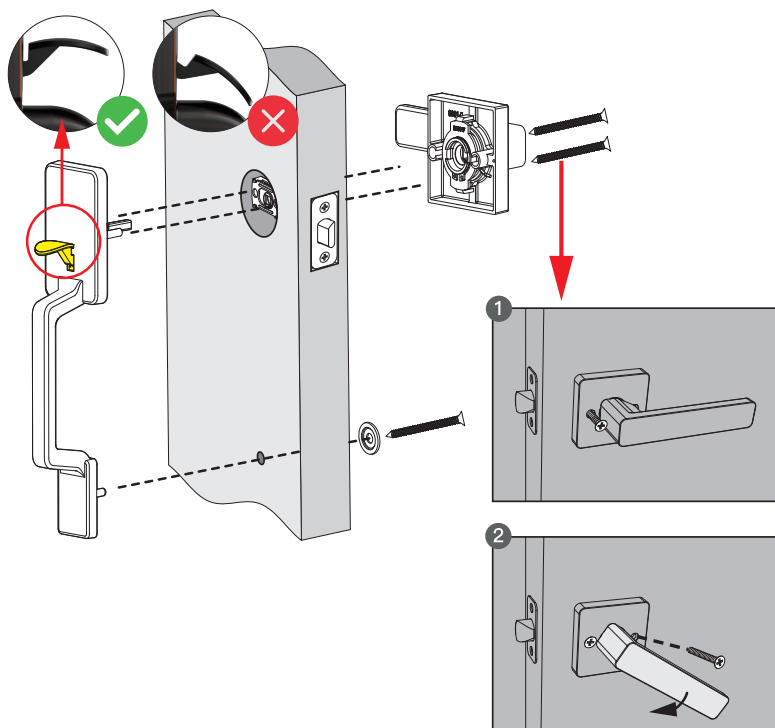

Need Help? Contact Us!

Whatever issues with TEEHO products. Please contact us before returning it.

 **+1 (833) 878-3346**

(Monday-Friday 9:00 am-5:00 pm PST)



support@teeho.com



teeho.com

*If you have your **order ID, videos or images of your problem** (if necessary) ready before contacting Customer Support, we will solve your problem faster and better.*