


A150UNI

Side inlet fill valve, universal

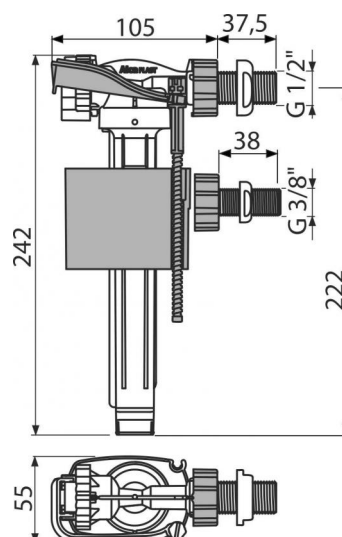

Application

For installation on the side of the cistern

For pre-wall installation systems

For replacement

Universal valve for plastic and ceramic flushing cisterns

Features

- Low sensitivity to the changing pressure in the water main
- Material: POM
- Adjustable water level
- Plastic thread length 38 mm
- Smooth closing without any shocks
- Built-in filter to trap dirt

Scope of supply

- Bayonet 1/2" with nut
- Bayonet 3/8" with nut
- Strainer for dirt
- Valve

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A150UNI	8595580570637	0,1979 13,8530 221,6480 kg	235×145×60 590×430×390 mm	70 1120 pcs

Guarantee

2/6 years

Customs code

84818019

Norms

EN 14124

Technical specifications

- Acoustic group I <20 dB
- Recommended operating pressure 0,5-0,8 MPa
- Working range 0,05-1,6 MPa
- Thread diameter 1/2 "
- Thread diameter 3/8 "