

APZ13-DOUBLE9-550 Fit and Go

Shower drain

Application


For wheelchair access
 For drainage of floor-level showers
 For installation into open spaces or near the wall of the shower area
 For indoor use

Features

- Design is determined by double-sided grid DOUBLE - from one side it is a full grid made of stainless steel and the other side has an option for embedding tiles or waterproof wood to the thickness of 12 mm
- Shower drain material: stainless steel 1.5 mm, AISI 304, DIN 1.4301
- Shower drain made from one piece of stainless steel sheet
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Gradient of inner part of the shower drain body
- Installation height 81 mm
- The shower drain body is protected by the polystyrene insert
- Adjustable height
- 25 years guarantee

Scope of supply

- Dismantling hook
- Fixation set for attaching adjustable legs: screw 4.2x38 – 4 pcs, anchor – 4 pcs
- Comb for applying glue into the grid frame
- Installation trough cover - polystyrene
- Combined odour trap SMART
- Adjustable feet 4 pcs
- Two-sided grid DOUBLE (full grid or grid for embedding tiles)
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- Trap for shower drain APZ-S9
- Linear shower drain

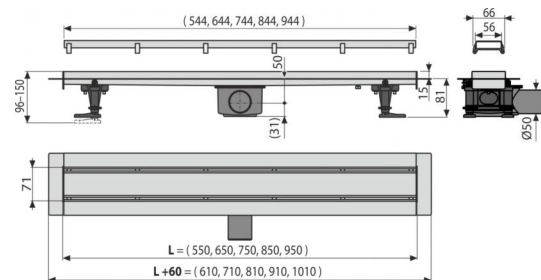

Order number, Logistic information

Code	EAN	9 mm	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ13-DOUBLE9-550	8595580571443	9 mm	3,1385 94,1550 0,0000 kg	857x147x100 880x780x410 mm	20 60 pcs

Guarantee	Customs code	Norms
2/25 years	39229000	EN 1253

Technical specifications

- Total installation height 96-150 mm
- Minimum thickness of concrete 81 mm
- Resistance of odour trap against the pressure 380 Pa
- Waste pipe diameter 50 mm
- Flow rate 50 l/min
- Load class K3 300 kg
- Odour trap 30 mm