

# APZ9-750M Simple

Shower drain with an edge for perforated grids

### Application


- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

### Features

- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

### Scope of supply

- Dismantling hook
- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Fixation set: screw Ø4.2x38 – 8 pcs, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 9 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

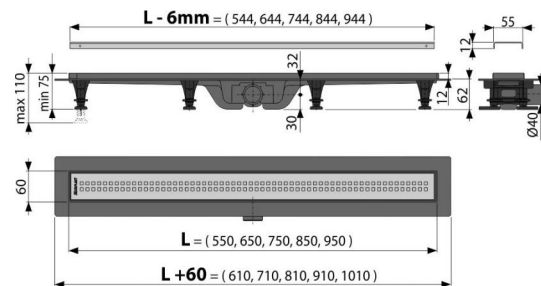

### Order number, Logistic information

| Code      | EAN           | Weight<br>(piece   packing   palett)     | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|-----------|---------------|--|---------------------------------|--------------------------------|
| APZ9-750M | 8595580537425 | 750 mm<br>2,0115   60,5370   201,6110 kg | 865x80x145   885x785x415 mm     | 30   90 pcs                    |

| Guarantee | Customs code | Norms   |
|-----------|--------------|---------|
| 2/6 years | 39229000     | EN 1253 |

### Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 28 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm