



BULL




Assembly guide




Your trike comes packed into 2 separate boxes:

BULL

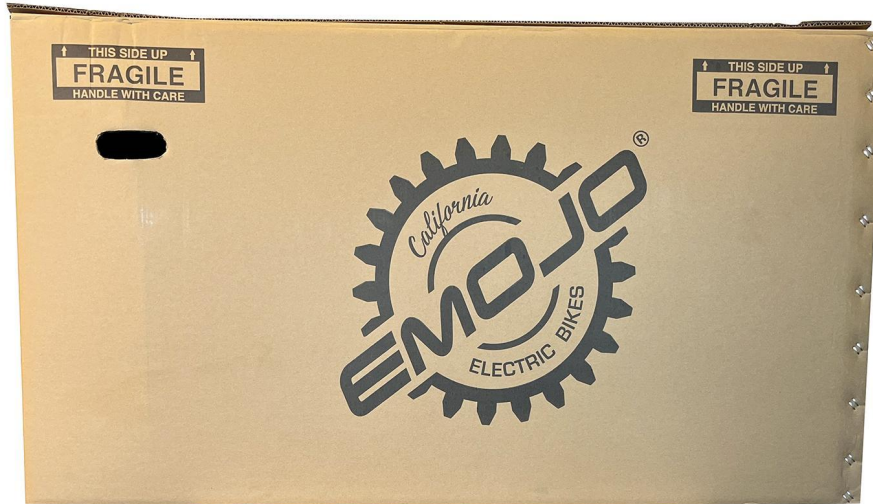

Box 1: Main frame and front wheel

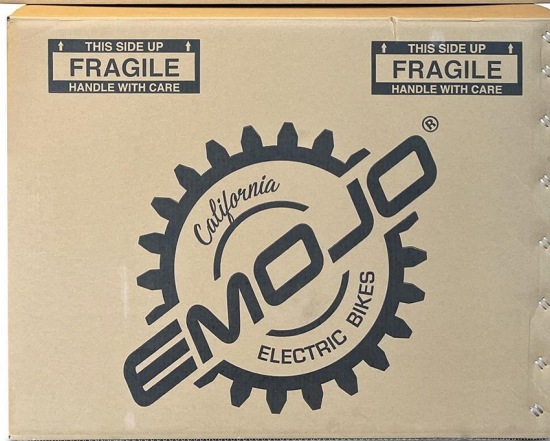


Box 2: Rear basket, rear frame section, rear wheel, fenders, seat and accessories



Identify the hardware

BULL

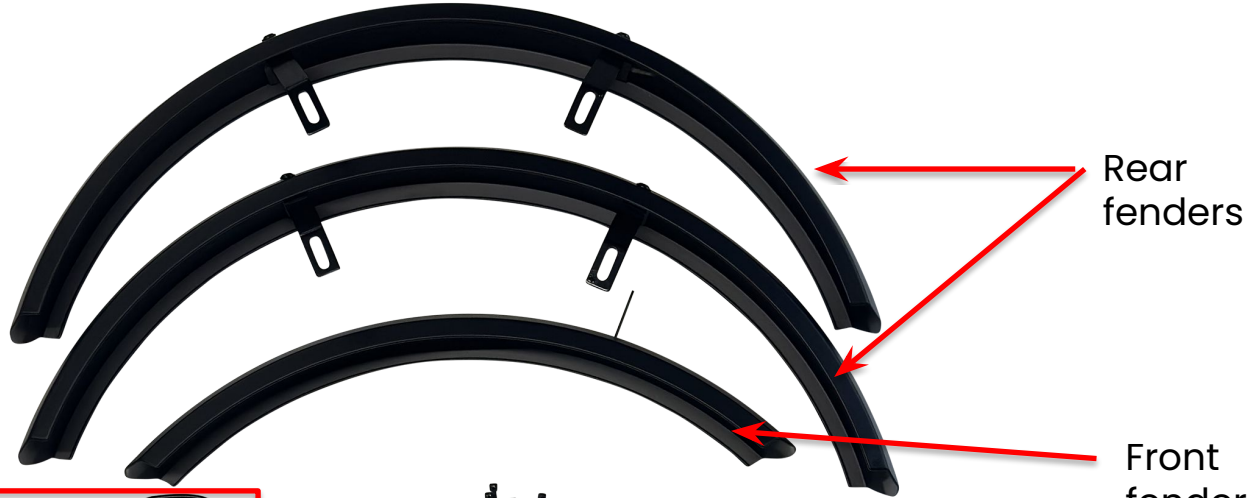

Rear fenders

Front fender

Chain breaker

Front fender hardware

Headlamp

Socket head bolts, pressure washers and safety nuts for rear fenders


Socket head bolts, pressure washers and safety nuts for the rear basket

Cable zip ties

Pedals

Tail light


Chain

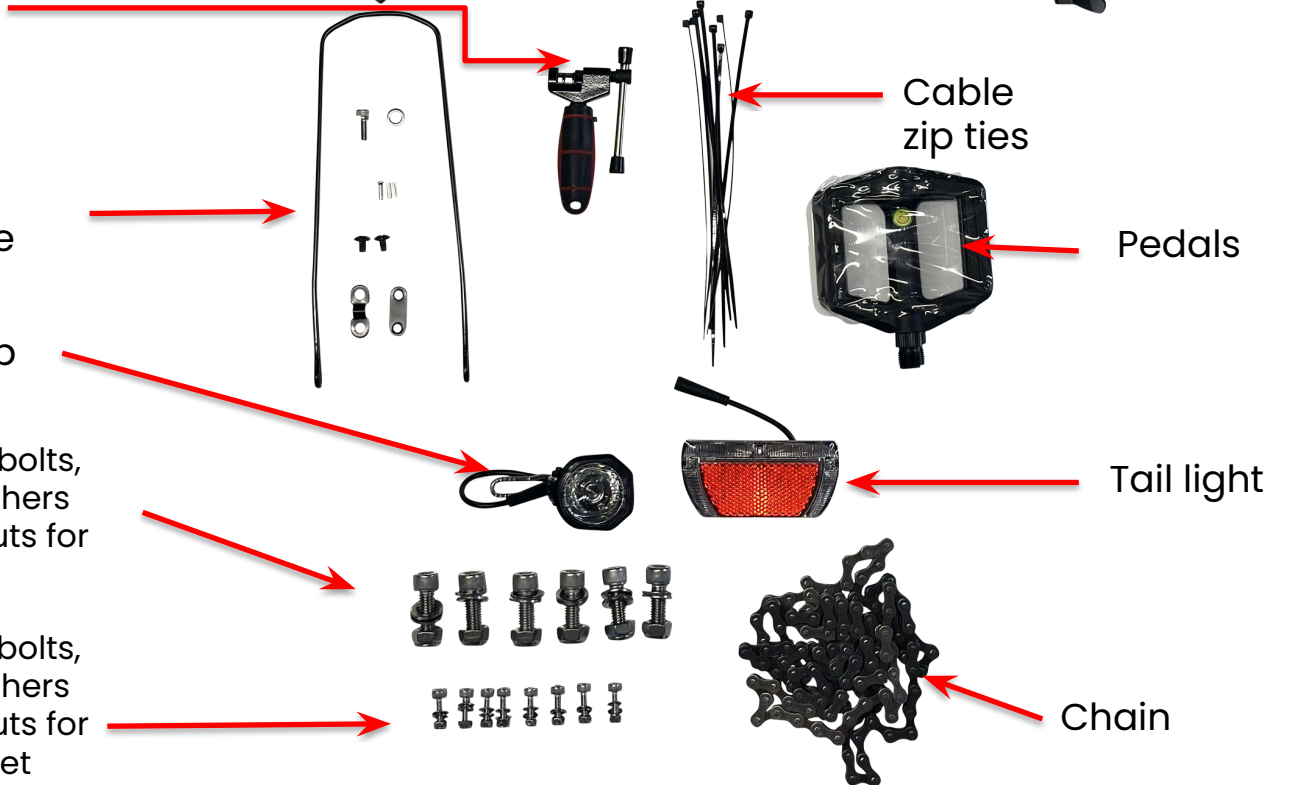


STEP 1: Assemble the stem and handlebar.



A-Remove the protective cap and ring from the steering tube

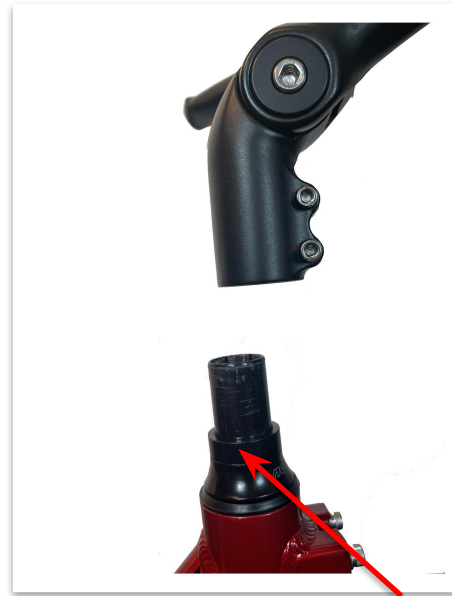

B-Insert the stem into the tube.
Use the spacer ring (arrow) to increase the handlebar height, for lower handlebar position you can remove the spacer ring.

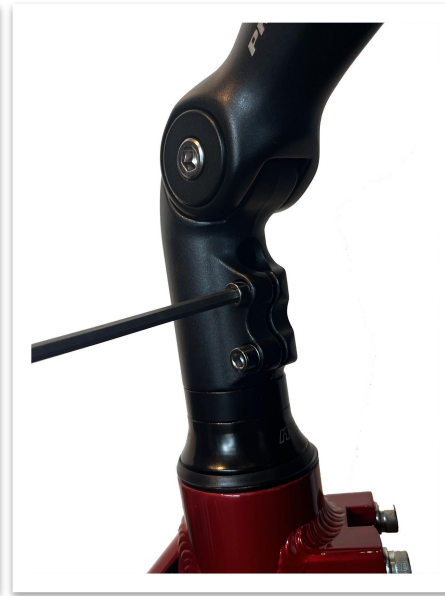

C-Align the stem/handlebar in a straight position and tighten




D-Secure the handlebar tightening the top screw with an allen wrench



BULL

STEP 2: Connect the front and rear frame sections

Use the 6 socket head bolts and safety nuts to connect both sections but do not tighten yet, you will need to adjust the chain before fully tightening

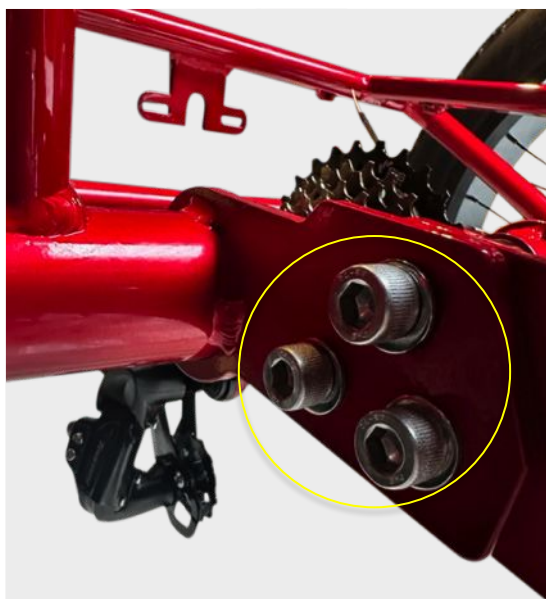

Connect the front and rear sections




STEP 3: Install the front wheel

BULL

1-Remove the shipping axle from the front fork and dispose it.

2-Make sure to have the spacer washers (a) on both sides between the fork

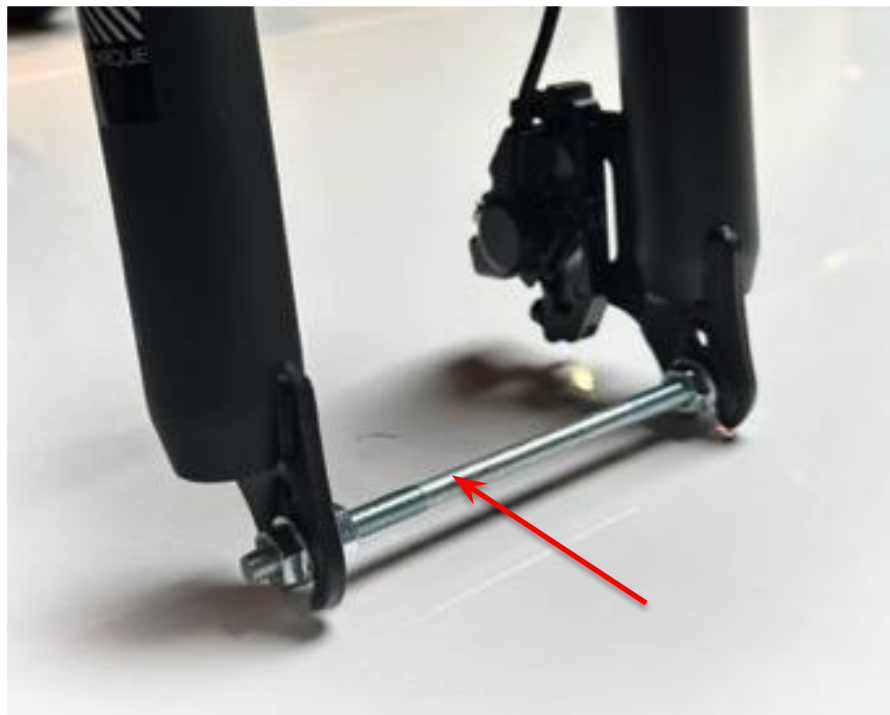



BULL

STEP 3: Install the front wheel





3-Insert the front tire into the fork, the disc needs to slide into the brake caliper.




4-Connect the motor cable on the right side of the fork.

STEP 4: Install the chain

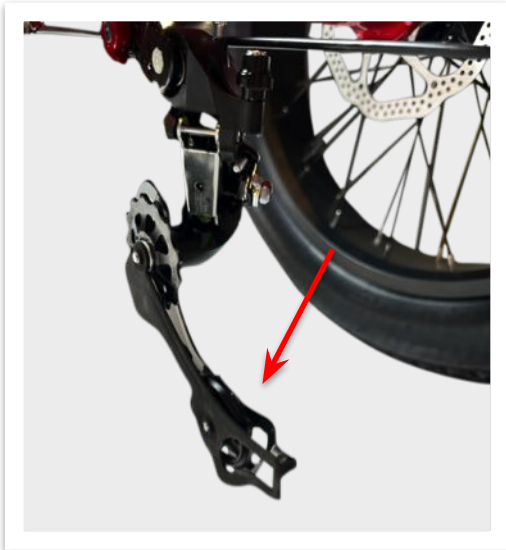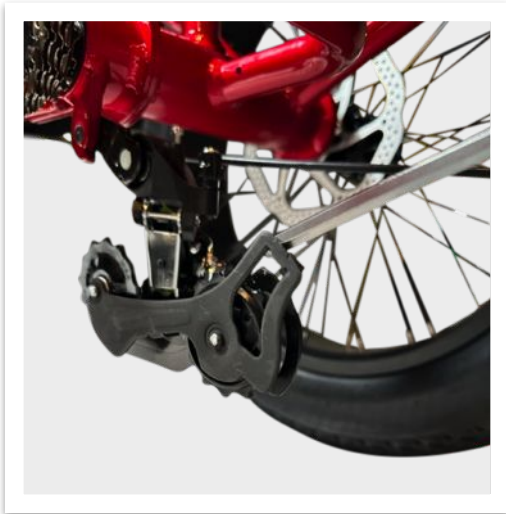

1-Pull down the
derailleur

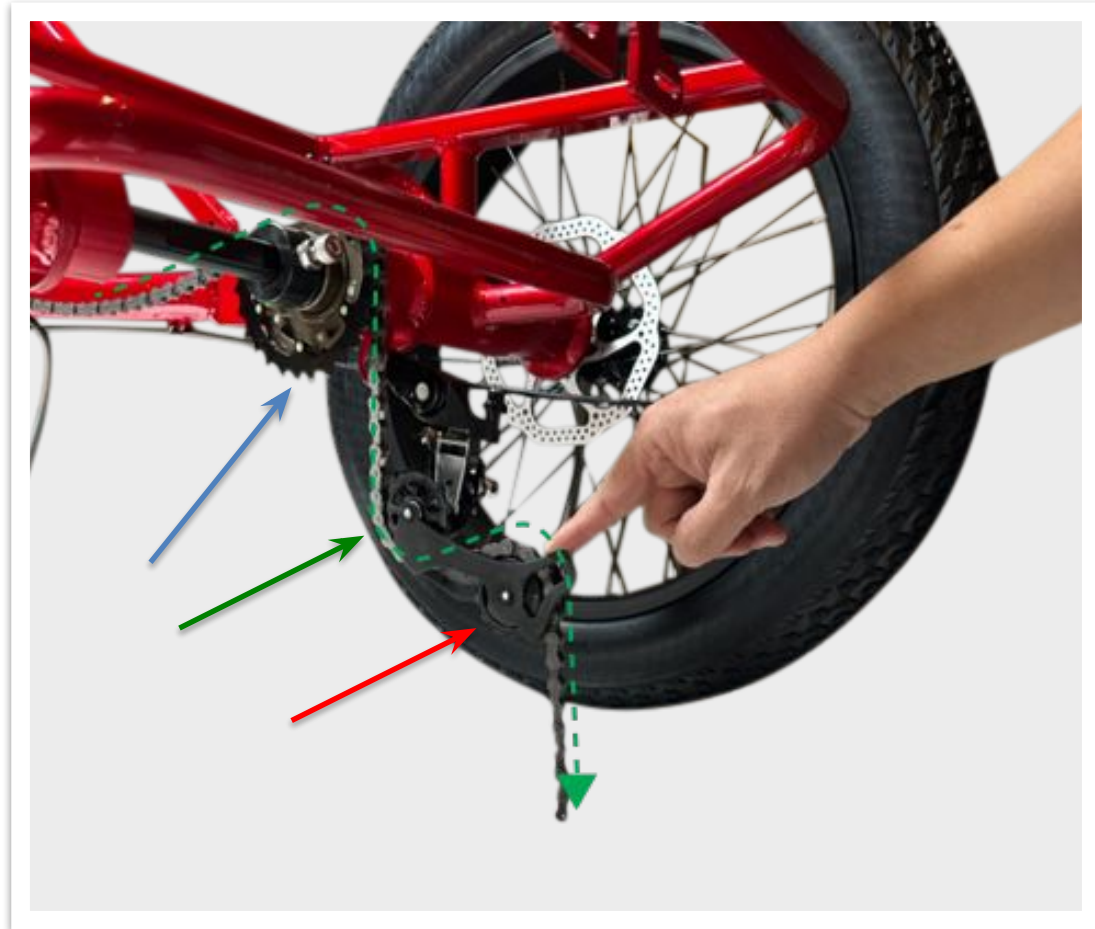

2-Start loading one end of the chain from top to bottom around the first small sprocket (blue arrow)... then around the second small sprocket (green arrow) and finally onto the third small sprocket (red arrow)...



Continues on the next page....




STEP 4: Install the chain

BULL

3-Keep reeling out the chain towards the front. The chain should now be routed around all the gears.

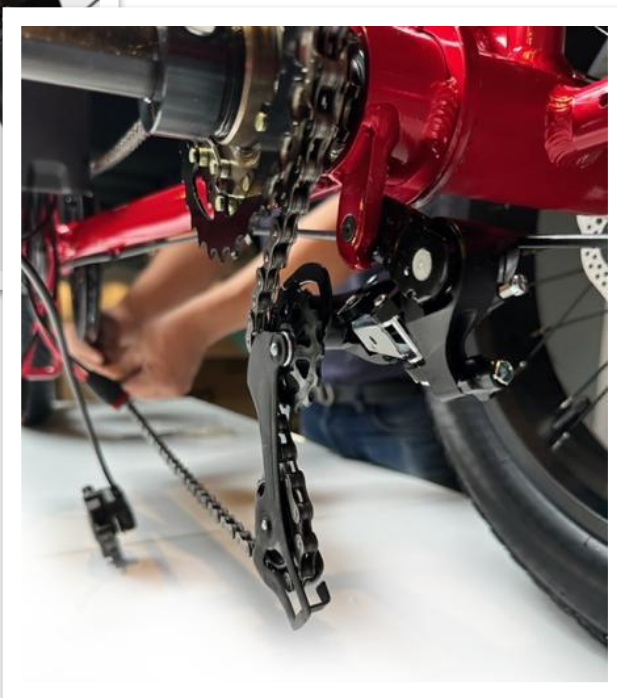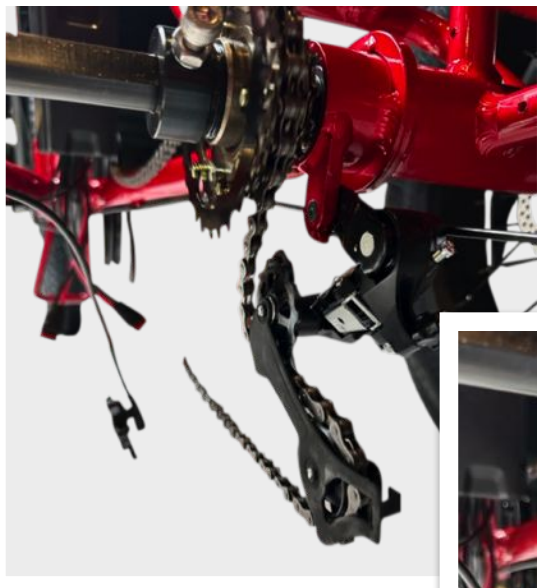

4-Make sure the chain also wraps around the main sprocket.

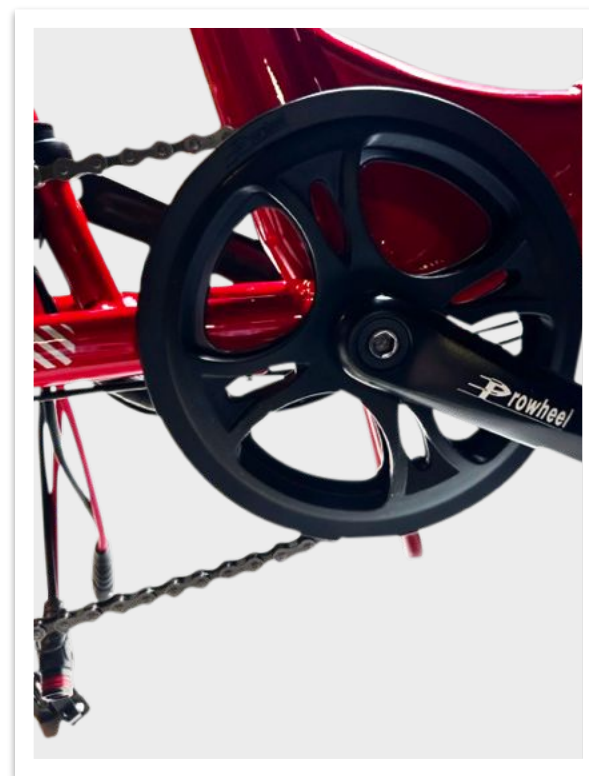


Continues on the next page...




STEP 4: Install the chain

BULL

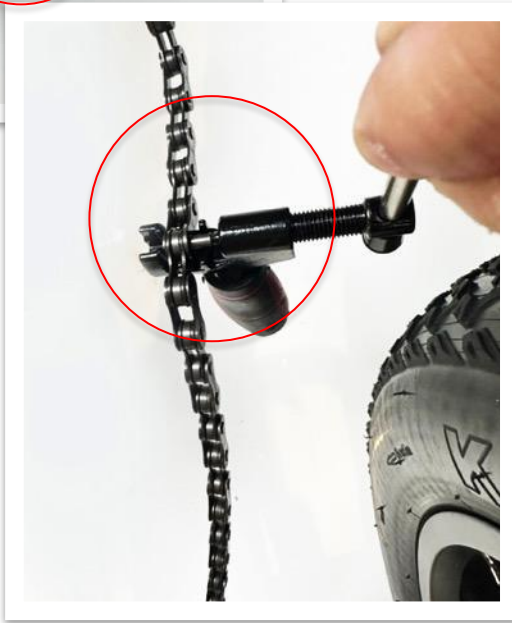

3-Link the chain together, insert the pin lock and secure using the chain breaker (included)

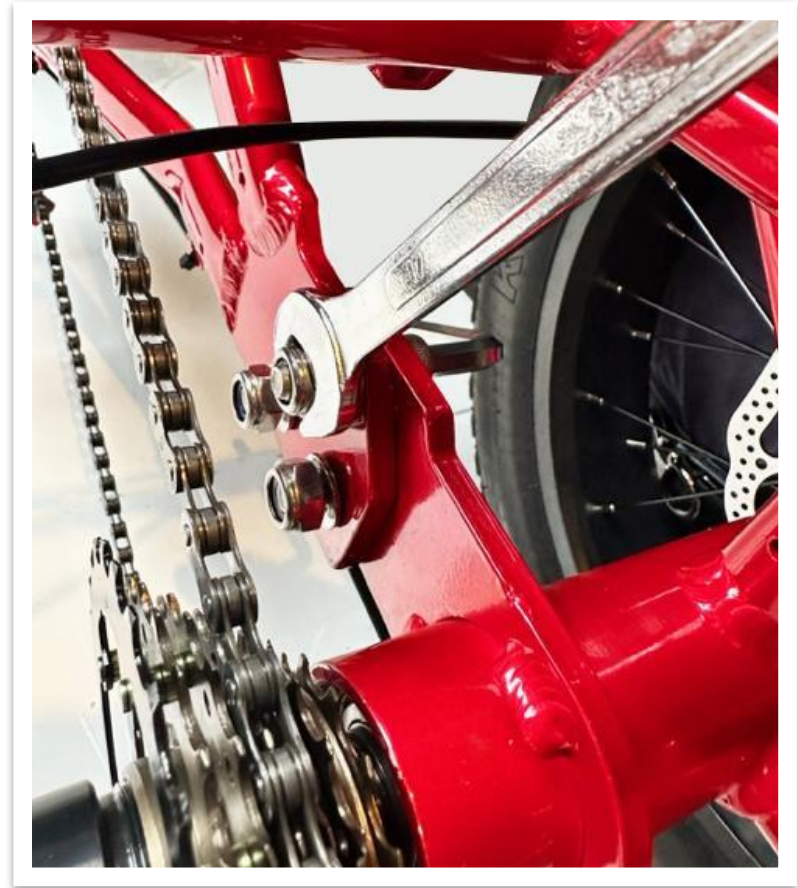

4-Using a wrench # 17, tighten the 6 bolts that connect the front and rear frame sections.




STEP 5: Shifter cable


BULL



1-Follow the route for the shifter cable to connect it to the derailleur.

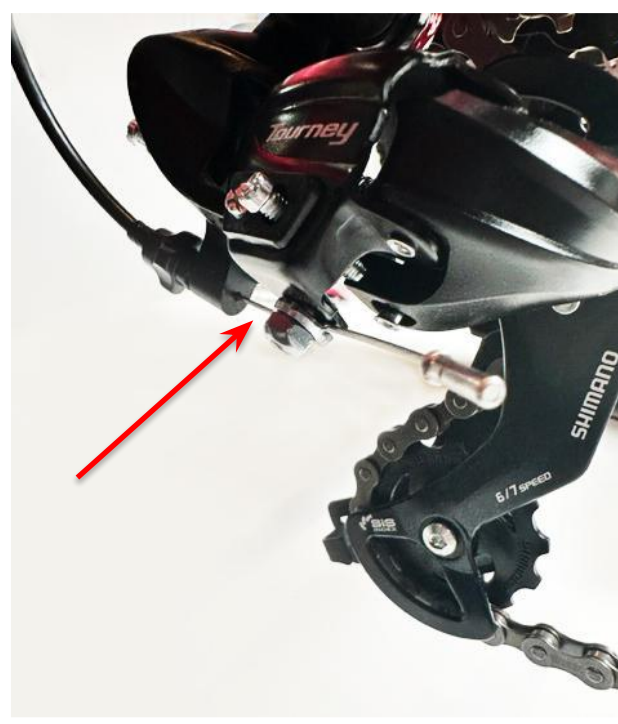


2-Insert the bare metal wire into the guide on the shifter

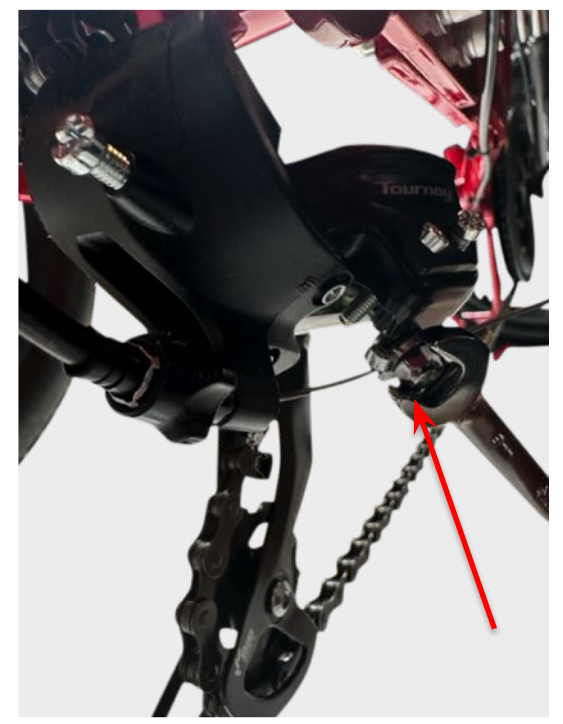

3-The wire will come to a stop once the rubber jacket hits the guide, tighten the security nut with a #9 wrench.

STEP 6: Brakes

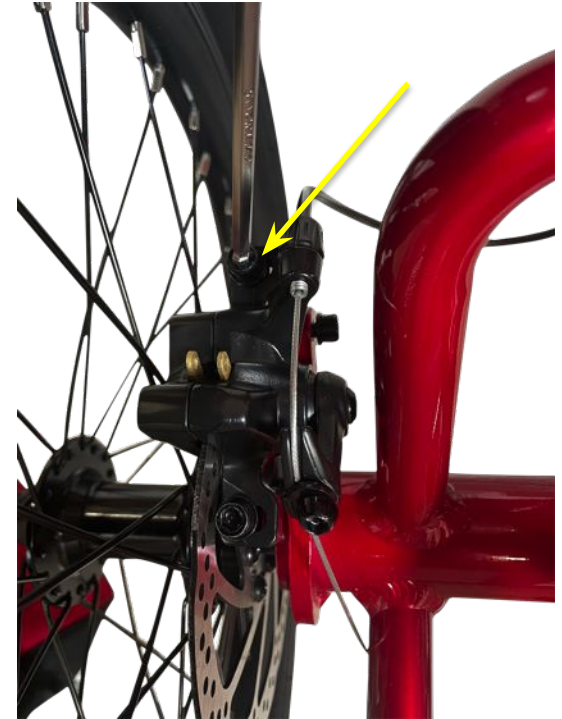

1-Fix the calipers to the frame.
Use the black socket head bolts, 2 bolts per side.



2-Adjust the alignment, use the top screws on both ends of the caliper to adjust, make sure the wheel spins freely without rubbing the disc or rubbing the caliper.





STEP 7: Front fender and headlight

BULL



Attach the bracket to the front fender

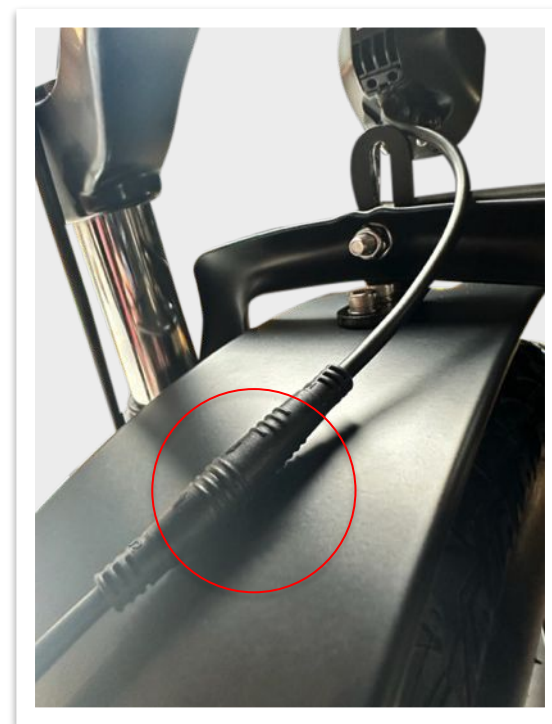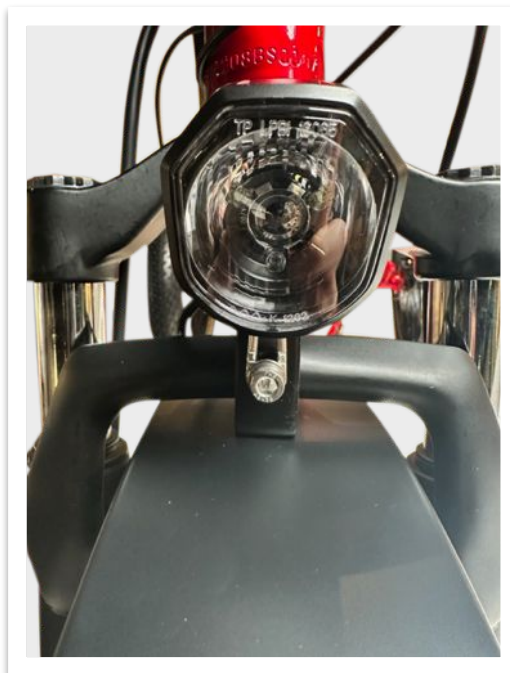

1-Install together the front fender and headlamp onto the front fork hole

2-Secure both with the socket long head bolt

3-Plug the end of the headlight cable to the other end from the trike.



STEP 8: Rear fenders and basket**

BULL

It is highly recommended to attach the rear fenders to the rear basket before fixing the basket to the frame.



2-Fix the rear fender brackets to the rear basket


***The rear basket does NOT include the wooden bottom, it can be purchased separately*

Continues on the next page....



STEP 8: Rear fenders and basket

BULL

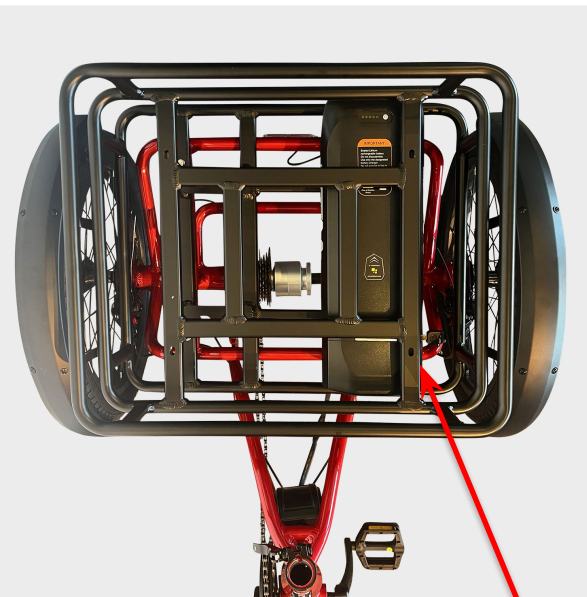

1-Fix the rear basket with fenders to the frame using the long bolts with washers



2-Secure from underneath with the safety nuts

***The rear basket does NOT include the wooden bottom, it can be purchased separately*




STEP 9: Rear tail light

BULL



1-Attach the tail light the rear end of the trike

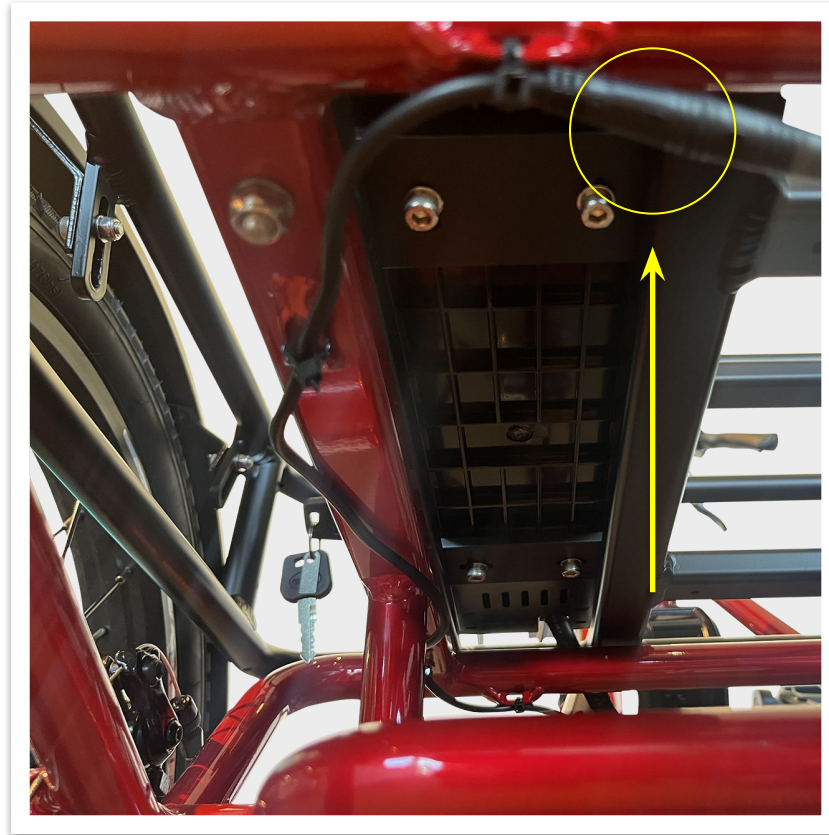


2-Connect the trail light cable to the trike

***The rear basket does NOT include the wooden bottom, it can be purchased separately*



STEP 10: Battery installation


BULL

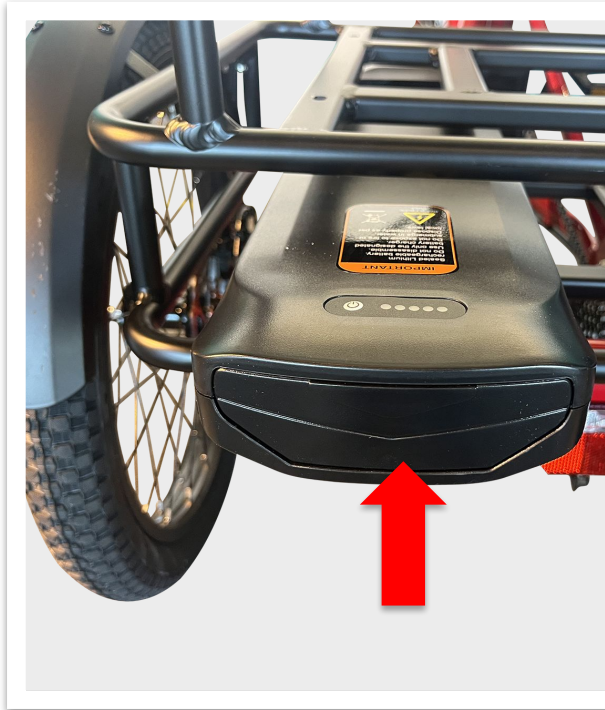

1-Slide the battery into its rail under the basket



2-Push the battery all the way in until it clicks into position

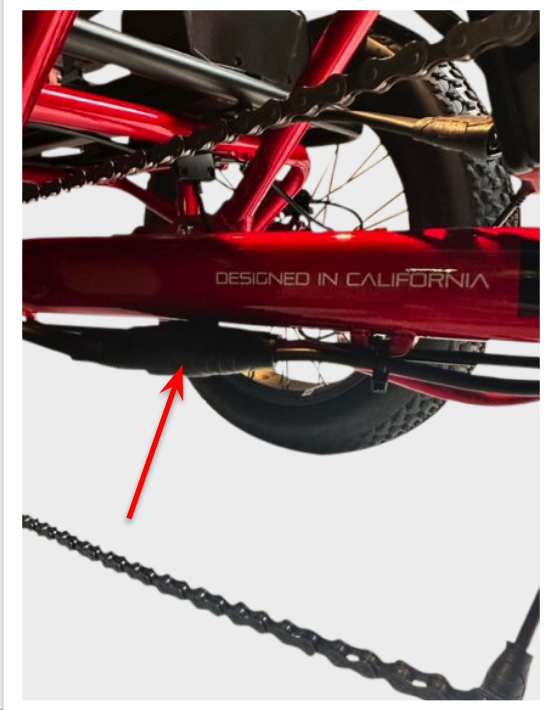

3-Connect the plugs of the battery rails to the main harness

***The rear basket does NOT include the wooden bottom, it can be purchased separately*



STEP 11: Lights ON/OFF


BULL

To turn your headlight on:

- 1-Turn on your electric system by pressing and holding the M button for 3 seconds
- 2-Press and hold the arrow Up button until the light comes on, you will see the light icon on the screen
- 3-To turn off the light press and hold the Up button again. The light icon will turn off from the screen.



Press and hold M button to turn system on

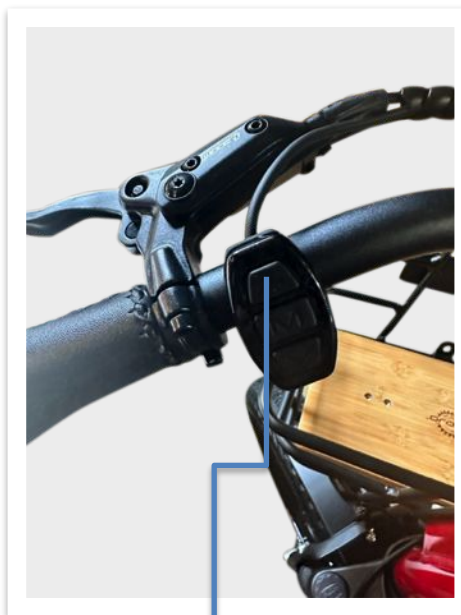

Press and hold UP button to turn light on/off






Light ON indicator on the screen

***The front basket and wooden bottom are sold as accessories.*



STEP 12: Pedals

BULL

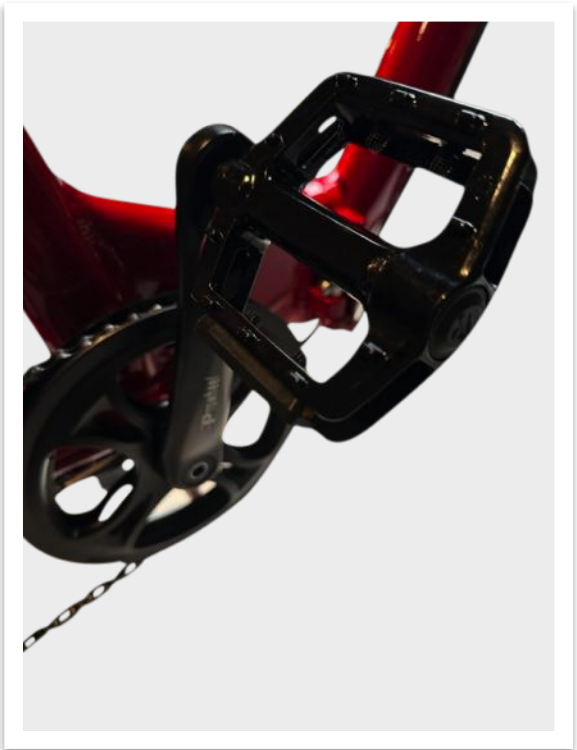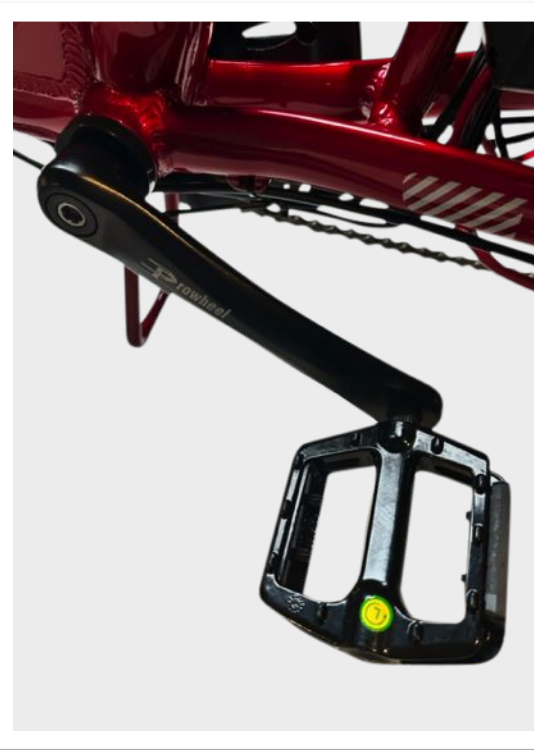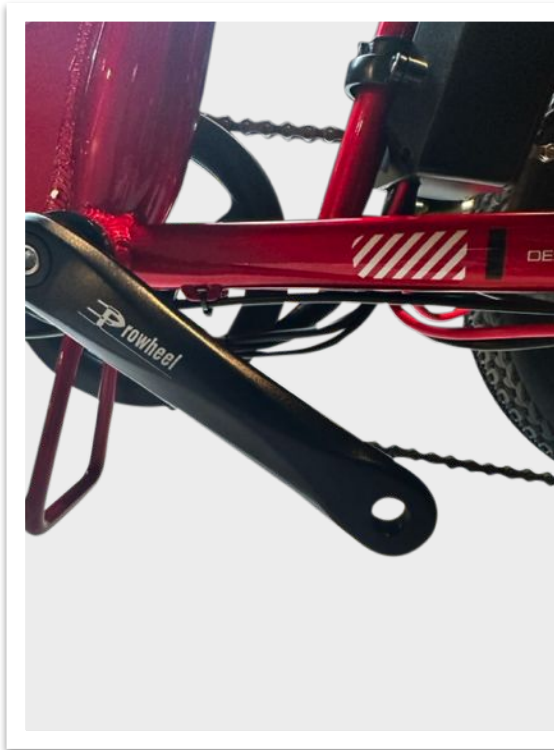

From the accessory box, identify the left and right pedals. Fix the pedals to the crank, the left pedal is tightened counter clockwise, the right pedal clockwise. Hand-tighten the pedals first, then use a wrench.



BULL

Questions or comments? Send us an
email at: support@emojobike.com