



衢州优特电子科技有限公司

Quzhou UTOP Electronic Technology Co.,Ltd



Industrial LED Light

- LED Flood Light
- LED High bay Light
- LED Street Light
- Solar LED light

Add: No.899-6, Century Avenue, Kecheng Area, Quzhou City, Zhejiang Province, China
Tel: 0086-570-3032068


Fax:0086-570-3032066

Company Profile

Quzhou UTOP Electronic Technology Co.Ltd is a manufacturer & trader of LED light with well-equipped testing facilities and strong technical force. Our products are extensively used in indoor-lighting & outdoor-lighting and other industries (advertisement). With a wide range of products, good quality at reasonable price, and stylish design, our products are well recognized and trusted by the customers worldwide.



Laboratory Facilities

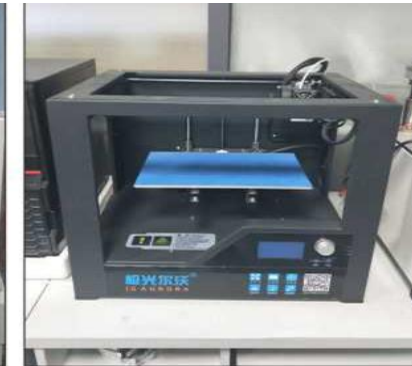

Product Series



LED FLOOD LIGHTS



LED HIGHBAY LIGHTS



LED STREET LIGHTS



SOLAR LED LIGHTS



Model: UT-TG90

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	219*38*173	SMD2835	24*2	80	≥90lm/w	>0.85	3000-6500K	AC220-240V	120°
100W	289*45*219	SMD2835	54*2	80	≥90lm/w	>0.85	3000-6500K	AC220-240V	120°
200W	338*45*240	SMD2835	108*2	80	≥90lm/w	>0.85	3000-6500K	AC220-240V	120°
300W	395*48*290	SMD2835	144*2	80	≥90lm/w	>0.85	3000-6500K	AC220-240V	120°
400W	457*48*337	SMD2835	216*2	80	≥90lm/w	>0.85	3000-6500K	AC220-240V	120°

Model: UT-TG85

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	103*25*68	SMD2835	12	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
20W	99*34*79	SMD2835	24	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
30W	132*34*102	SMD2835	28	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
50W	175*38*131	SMD2835	48	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
70W	219*38*173	SMD2835	72	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
100W	256*38*195	SMD2835	108	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
150W	289*45*219	SMD2835	144	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
200W	338*45*240	SMD2835	216	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
300W	395*48*290	SMD2835	288	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°
400W	457*48*337	SMD2835	432	80	≥90lm/w	>0.5	3000-6500K	AC110-265V	120°

Model: UT-TG68


IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	99*34*79	SMD2835	12	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
20W	118*35*88	SMD2835	20	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
30W	160*35*120	SMD2835	30	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
50W	210*55*170	SMD2835	50	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
100W	280*70*230	SMD2835	100	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
200W	350*90*278	SMD2835	200	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
300W	370*80*435	SMD2835	300	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
500W	440*100*250	SMD2835	500	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°

Model: UT-TG76

IP65 waterproof

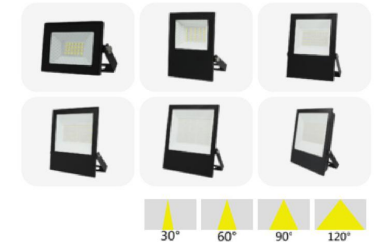

Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	103*25*68	SMD2835	12	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
20W	87*27*125	SMD2835	20	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
30W	105*31*142	SMD2835	30	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
50W	155*37*202	SMD2835	50	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
100W	190*40*232	SMD2835	100	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
200W	260*55*305	SMD2835	200	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°
300W	305*60*365	SMD2835	300	80	≥90lm/w	>0.5	3000-6500K	AC100-265V	120°

Model: UT-TG81

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	192*58*120	SMD2835	54	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	70°
100W	247*70*152	SMD2835	108	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	70°
200W	320*75*187	SMD2835	216	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	70°

LED FLOOD LIGHT

Model: UT-TG41

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	103*35*68	SMD2835	12	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
20W	123*25*88	SMD2835	24	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
30W	150*25*110	SMD2835	36	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
50W	200*30*160	SMD2835	48	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
70W	240*30*174	SMD2835	72	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
100W	300*30*205	SMD2835	108	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
150W	330*37*255	SMD2835	144	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°
200W	365*42*277	SMD2835	216	80	≥90lm/w	>0.9	3000-6500K	AC220-240V	120°

Model: UT-TG47

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	230*70*243	SMD2835	50	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
100W	279*75*290	SMD2835	100	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
200W	320*75*365	SMD2835	200	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
300W	370*80*435	SMD2835	300	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
500W	440*100*520	SMD2835	450	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°

LED FLOOD LIGHT

Model: UT-TG40

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	115*35*140	SMD2835	20	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
20W	150*45*170	SMD2835	40	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
30W	195*50*230	SMD2835	60	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
50W	240*58*285	SMD2835	100	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
70W	275*70*322	SMD2835	140	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
100W	302*70*322	SMD2835	200	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
150W	335*82*395	SMD2835	300	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
200W	377*85*423	SMD2835	400	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°
300W	417*95*505	SMD2835	600	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	120°

Model: UT-TG71

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	210*45*235	SMD2835	54	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
100W	245*49*275	SMD2835	108	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
200W	300*59*335	SMD2835	216	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
400W	370*80*435	SMD2835	432	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°

LED FLOOD LIGHT



Model: UT-TG86

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	210*45*235	SMD2835	54	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
100W	245*49*275	SMD2835	108	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
200W	300*59*335	SMD2835	216	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
400W	370*80*435	SMD2835	432	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°

Model: UT-TG72

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	232*50*255	SMD2835	50	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
100W	267*50*302	SMD2835	75	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
200W	320*60*370	SMD2835	125	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
400W	370*80*435	SMD2835	300	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
600W	440*100*520	SMD2835	500	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°

LED FLOOD LIGHT


Model: UT-TG92

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
10W	95*33*78	SMD2835	12	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
20W	122*43*97	SMD2835	24	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
30W	150*43*120	SMD2835	36	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
50W	185*43*147	SMD2835	48	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
100W	261*43*211	SMD2835	108	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
150W	291*47*242	SMD2835	144	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°
200W	323*47*276	SMD2835	216	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	90°

Model: UT-LD30



IP65 waterproof



LED STREET LIGHT

Model: UT-LD43



IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
30W	130*57*316	SMD3030	30	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°
50W	155*57*355	SMD3030	50	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°
100W	160*57*420	SMD3030	100	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°
150W	170*67*546	SMD3030	150	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°

Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	180*88*490	SMD3030	50	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°
100W	215*88*562	SMD3030	100	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°
150W	234*88*627	SMD3030	150	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	85*140°

Model: UT-LD16



IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
30W	115*35*65	SMD2835	30	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	70*130°
50W	125*41*65	SMD2835	50	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	70*130°
100W	145*47*75	SMD2835	100	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	70*130°
150W	170*85*59	SMD2835	150	80	≥90lm/w	>0.9	3000-6500K	AC85-265V	70*130°

LED STREET LIGHT




Model: UT-LD33

IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	420*70*200	SMD2835	60	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	60*130°
100W	495*80*215	SMD2835	120	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	60*130°
150W	540*80*215	SMD2835	150	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	60*130°
200W	600*80*235	SMD2835	200	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	60*130°

Model: UT-GK12



IP65 waterproof



Model: UT-GK16



IP20 non-waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
100W	Φ380*H270	SMD3030	126	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
150W	Φ400*H290	SMD3030	168	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
200W	Φ450*H310	SMD3030	252	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°

Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
50W	Φ280*H144	SMD2835	50	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
100W	Φ380*H154	SMD2835	100	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°
150W	Φ430*H165	SMD2835	150	80	≥90lm/w	>0.5	3000-6500K	AC180-265V	120°

Model: UT-GK17



IP20 non-waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
100W	Φ380*H295	SMD2835	100	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
150W	Φ380*H295	SMD2835	150	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°
200W	Φ450*H308	SMD2835	200	80	≥90lm/w	>0.9	3000-6500K	AC100-265V	90°

Model: UT-GK14




IP20 non-waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
100W	Φ380*H295	SMD2835	120	80	≥90lm/w	>0.9	3000-6500K	AC180-265V	90°
150W	Φ380*H295	SMD2835	180	80	≥90lm/w	>0.9	3000-6500K	AC180-265V	90°
200W	Φ450*H308	SMD2835	240	80	≥90lm/w	>0.9	3000-6500K	AC180-265V	90°

Model: UT-GK18

IP20 non-waterproof

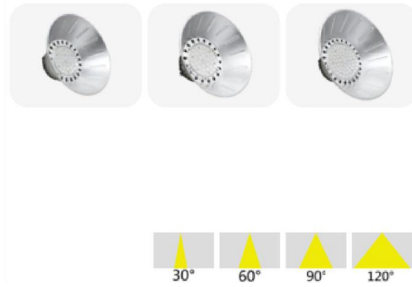

Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
100W	Φ380*H270	SMD2835	120	80	≥90lm/w	>0.9	3000-7000K	AC180-265V	90°
150W	Φ400*H290	SMD2835	180	80	≥90lm/w	>0.9	3000-7000K	AC180-265V	90°
200W	Φ450*H310	SMD2835	240	80	≥90lm/w	>0.9	3000-7000K	AC180-265V	90°

Model: UT-LD02


IP65 waterproof



Power	Size (mm)	LED chip	Leds Qty	CRI	Optical effect	PF	CCT (K)	Voltage	Beam Angle
400W	Φ365*H313	SMD3030	300	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°
600W	Φ423*H353	SMD3030	500	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°
800W	Φ447*H395	SMD3030	650	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°
1000W	Φ447*H395	SMD3030	800	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°
1500W	Φ495*H410	SMD3030	1200	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°
2000W	Φ600*H470	SMD3030	1600	80	≥90lm/w	>0.9	6000-7000K	AC180-265V	90°

Model: UT-STG91


IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
50W	198*55*182	SMD2835 140pc	80	780lm±10%	7500-8000K	350*235*17	6V/8W	5A/DC3.2V	5-6H	≥14H
100W	198*55*182	SMD2835 140pc	80	780lm±10%	7500-8000K	350*290*17	6V/12W	10A/DC3.2V	5-6H	≥14H
200W	244*55*211	SMD2835 216pc	80	1200lm±10%	7500-8000K	350*350*17	6V/15W	15A/DC3.2V	5-6H	≥14H
300W	305*55*255	SMD2835 396pc	80	1700lm±10%	7500-8000K	530*350*17	6V/25W	20A/DC3.2V	5-6H	≥14H
400W	378*55*286	SMD2835 600pc	80	1850lm±10%	7500-8000K	630*350*25	6V/30W	25A/DC3.2V	5-6H	≥14H

Model: UT-STG69

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
30W	193*50*146	SMD5730 42pc	80	360lm±10%	7500-8000K	350*290*17	6V/8W	32650 10A/DC3.2V	5-6H	≥14H
60W	227*50*180	SMD5730 72pc	80	520lm±10%	7500-8000K	350*350*17	6V/12W	32650 12A/DC3.2V	5-6H	≥14H
90W	255*65*208	SMD5730 88pc	80	880lm±10%	7500-8000K	530*350*17	6V/15W	32650 18A/DC3.2V	5-6H	≥14H
120W	300*75*257	SMD5730 208pc	80	1250lm±10%	7500-8000K	530*350*17	6V/25W	32650 24A/DC3.2V	5-6H	≥14H

Model: UT-STG93

IP65 waterproof




Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
100W	190*57*148	SMD2835 128pc	80	780lm±10%	7500-8000K	350*235*17	6V/8W	5A/DC3.2V	5-6H	≥14H
200W	240*57*183	SMD2835 200pc	80	780lm±10%	7500-8000K	350*290*17	6V/12W	10A/DC3.2V	5-6H	≥14H
300W	260*57*205	SMD2835 308pc	80	1200lm±10%	7500-8000K	350*350*17	6V/15W	15A/DC3.2V	5-6H	≥14H
400W	300*57*240	SMD2835 332pc	80	1700lm±10%	7500-8000K	530*350*17	6V/25W	20A/DC3.2V	5-6H	≥14H
500W	358*57*290	SMD2835 644pc	80	1850lm±10%	7500-8000K	630*350*25	6V/30W	25A/DC3.2V	5-6H	≥14H

SOLAR LED FLOOD LIGHT

Model: UT-STG72

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
100W	232*50*255	SMD5730 60pc	80	730lm±10%	7500-8000K	350*235*17	6V/12W	32650 10A/DC3.2V	5-6H	≥14H
200W	267*50*302	SMD5730 80pc	80	900lm±10%	7500-8000K	350*290*17	6V/15W	32650 15A/DC3.2V	5-6H	≥14H
300W	320*60*335	SMD5730 176pc	80	1150lm±10%	7500-8000K	350*350*17	6V/25W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SLD41

IP65 waterproof




Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
200W	217*50*460	SMD2835 40pc	80	300lm±10%	8000-9000K	350*160	6V/6W	32650 10A/DC3.2V	5-6H	≥14H
300W	217*50*577	SMD2835 80pc	80	700lm±10%	8000-9000K	475*160	6V/8W	32650 15A/DC3.2V	5-6H	≥14H
400W	282*50*712	SMD2835 120pc	80	1100lm±10%	8000-9000K	475*250	6V/12W	32650 20A/DC3.2V	5-6H	≥14H

SOLAR LED STREET LIGHT

Model: UT-SLD13

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
30W	185*55*358	SMD2835 40pc	80	300lm±10%	8000-9000K	277*172	6V/6W	32650 10A/DC3.2V	5-6H	≥14H
60W	190*55*465	SMD2835 80pc	80	700lm±10%	8000-9000K	381*175	6V/8W	32650 15A/DC3.2V	5-6H	≥14H
90W	195*60*597	SMD2835 120pc	80	1100lm±10%	8000-9000K	484*181	6V/12W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SLD26



IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
30W	195*53*390	SMD2835 48pc	80	350lm±10%	8000-9000K	301*184*4	6V/6W	32650 5A/DC3.2V	5-6H	≥14H
60W	220*55*485	SMD2835 96pc	80	650lm±10%	8000-9000K	397*212*4	6V/8W	32650 10A/DC3.2V	5-6H	≥14H
90W	240*60*620	SMD2835 144pc	80	1000lm±10%	8000-9000K	508*231*4	6V/12W	32650 15A/DC3.2V	5-6H	≥14H
120W	240*65*720	SMD2835 196pc	80	1350lm±10%	8000-9000K	609*233*4	6V/15W	32650 18A/DC3.2V	5-6H	≥14H

SOLAR LED STREET LIGHT

Model: UT-SLD40



IP65 waterproof




Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
200W	213*54*475	SMD2835 108pc	80	930lm±10%	8000-9000K	350*160	6V/18W	32650 15A/DC3.2V	5-6H	≥14H
300W	227*60*623	SMD2835 162pc	80	1250lm±10%	8000-9000K	480*160	6V/25W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SLD28



IP65 waterproof

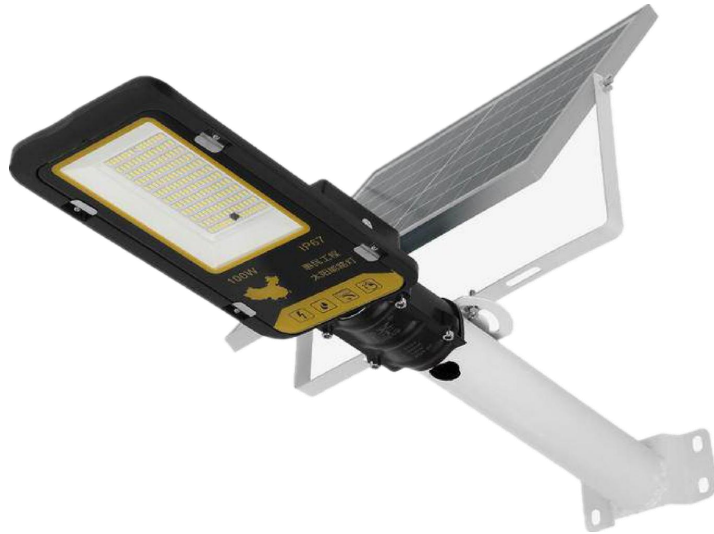

Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
100W	162*90*390	SMD5730 168pc	80	750lm±10%	8000-9000K	290*350*17	6V/12W	32650 10A/DC3.2V	5-6H	≥14H
200W	180*90*445	SMD5730 270pc	80	930lm±10%	8000-9000K	350*400*17	6V/18W	32650 15A/DC3.2V	5-6H	≥14H
300W	220*70*550	SMD5730 400pc	80	1250lm±10%	8000-9000K	530*350*17	6V/25W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SLD38

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
100W	162*90*390	SMD5730 144pc	80	690lm±10%	8000-9000K	290*350*17	6V/12W	32650 10A/DC3.2V	5-6H	≥14H
200W	180*90*445	SMD5730 240pc	80	930lm±10%	8000-9000K	350*400*17	6V/18W	32650 15A/DC3.2V	5-6H	≥14H
300W	220*70*550	SMD5730 432pc	80	1350lm±10%	8000-9000K	530*350*17	6V/25W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SLD39

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
100W	493*210*50	SMD2835 50pc	80	650lm±10%	8000-9000K	350*350*17	6V/12W	32650 15A/DC3.2V	5-6H	≥14H
200W	493*210*50	SMD2835 400pc	80	1250lm±10%	8000-9000K	530*350*17	6V/18W	32650 20A/DC3.2V	5-6H	≥14H

SOLAR LED STREET LIGHT

Model: UT-SCP01

IP65 waterproof



Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
90W	Φ420*H125	SMD5730 240pc	80	950lm±10%	8000-9000K	Φ420	6V/15W	32650 15A/DC3.2V	5-6H	≥14H
150W	Φ550*H125	SMD5730 400pc	80	1450lm±10%	8000-9000K	Φ544	6V/24W	32650 20A/DC3.2V	5-6H	≥14H

Model: UT-SBD02/03



IP44 waterproof



Admin@Utop-tech.com

www.utop-tech.net

+0086 570-3032068

ADD: No.899-6, Century Avenue, Kecheng Area,
Quzhou City, Zhejiang Province, China

Power	Light Size (mm)	LED chip	CRI	Luminous Flux	CCT(K)	Solar Panel Size (mm)	Solar Panel Specification	Battery	Charge time	Working time
20W (two lights)	190*115*135	SMD2835 60pc	80	200lm±10%	6000-7000K	80*137	5.5V/1.5W	18650 2000MA DC3.2V	5-6H	≥14H
30W (three lights)	177*117*113	SMD2835 78pc	80	220lm±10%	6000-7000K	80*137	5.5V/1.5W	18650 2000MA DC3.2V	5-6H	≥14H