

Catalog Number: UA3737-ZGF

Features and Ratings

- Ringless Type Meter Socket
- Aluminum Enclosure
- 200A Continuous, 250A Max, 3 Position, 270Amp Overall
- Outdoor Enclosure (NEMA Type 3R)
- 1 Phase, 3 Wire, 600V AC
- 4 Jaw
- For Overhead or Underground Service
- HD Hub Opening With Coverplate Installed

CONNECTORS

| CONNECTORS | WIRE SIZE | TORQUE |
|------------|-------------|-----------|
| LINE | #1/0-600MCM | 375 IN-LB |
| LOAD* | #6-350MCM | 250 IN-LB |
| GROUND | #14-2 | 50 IN-LB |

* External Hex drive 1/2"
* Internal Hex drive 5/16"






ACCESSORIES

HD Cover Plate
Cat No: H56933-4
HD Cover Plate
Cat No: EC56933S

HD HUB KITS

Cat No: H56856-2 (3.00")
Cat No: H56857-2 (3.50")
Cat No: H56858-2 (4.00")
HD HUB KITS
Cat No: EC56856 (3.00")
Cat No: EC56857 (3.50")
Cat No: EC56858 (4.00")

5th Terminal Use Talon Kit
Cat No: 659-0121

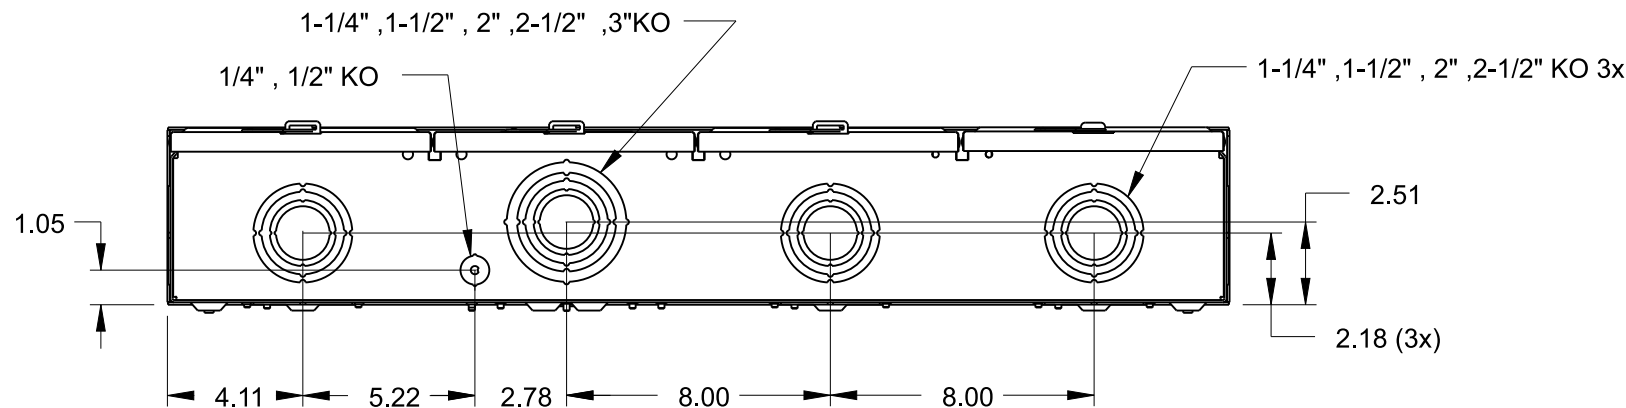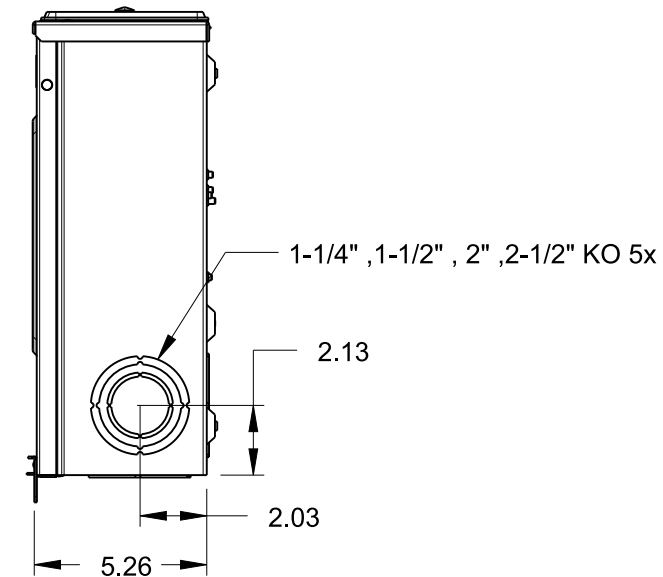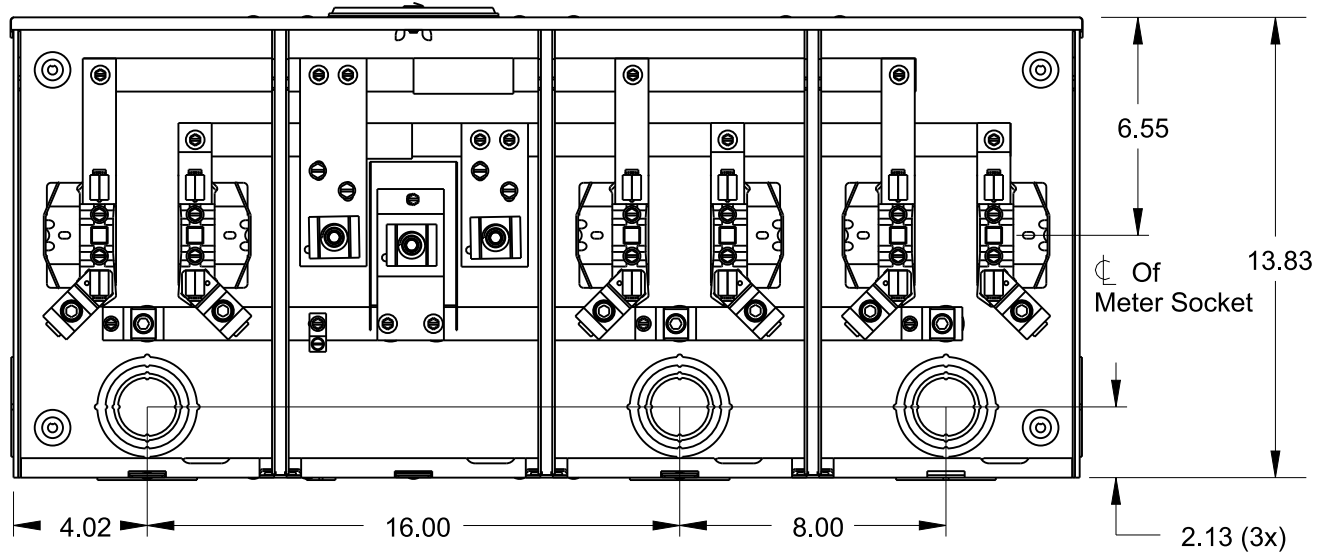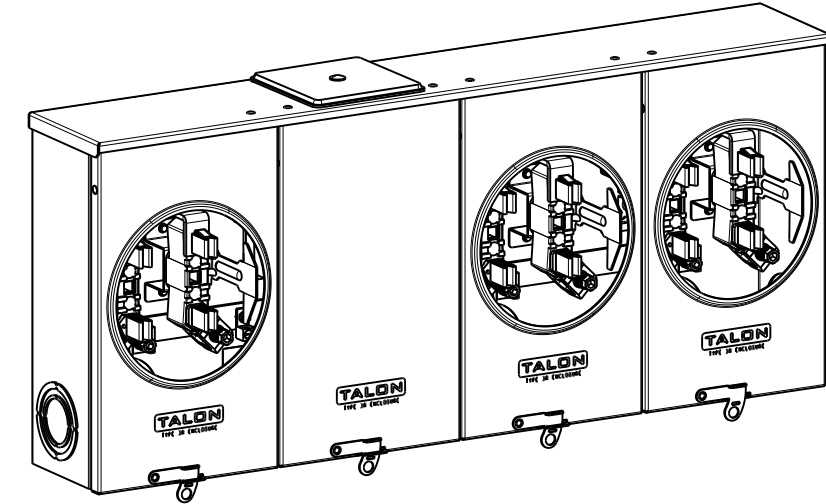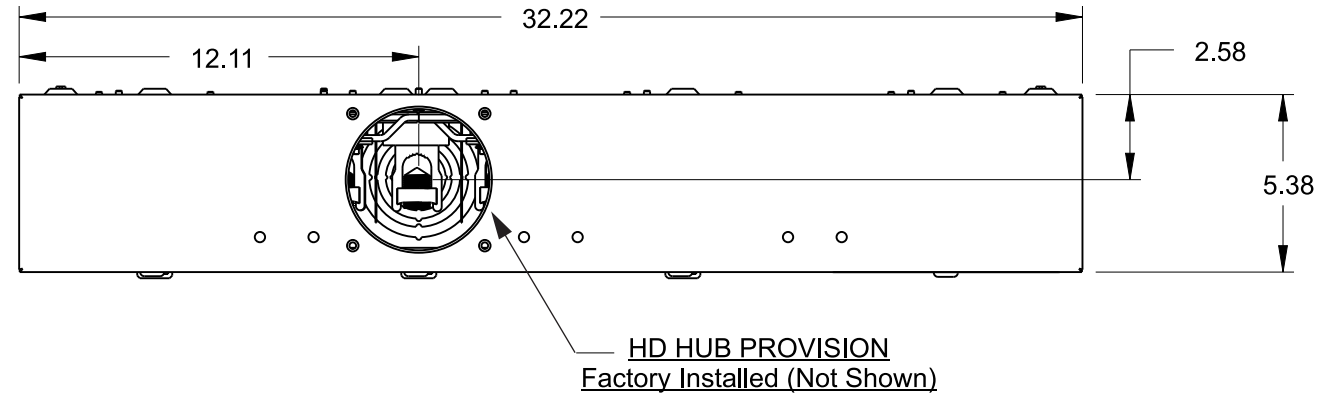

TALON

Multi-Position Metering

Description:
**200A Cont, 4 Jaw, A14, 600V AC,
Aluminum Enclosure**