

Catalog Number: UA5739-MGF

Features and Ratings

- Ringless Type Meter Socket
- 200A Continuous, 250A Max, 5 Position, 450Amp Overall
- Outdoor Enclosure (NEMA Type 3R)
- 1 Phase, 3 Wire, 600V AC
- 4 Jaw
- For Overhead or Underground Service
- HD Hub Opening With Coverplate Installed
- Aluminum Enclosure

CONNECTORS

CONNECTORS	WIRE SIZE	TORQUE
LINE	#1/0-600MCM	375 IN-LB
LOAD*	#6-350MCM	250 IN-LB
GROUND	#14-2	50 IN-LB

* External Hex drive 1/2"
* Internal Hex drive 5/16"



ACCESSORIES

HD Cover Plate
Cat No: H56933-4
HD Cover Plate
Cat No: EC56933S




HD HUB KITS

Cat No: H56856-2 (3.00")
Cat No: H56857-2 (3.50")
Cat No: H56858-2 (4.00")
HD HUB KITS
Cat No: EC56856 (3.00")
Cat No: EC56857 (3.50")
Cat No: EC56858 (4.00")

5th Terminal Use Talon Kit
Cat No: 659-0121

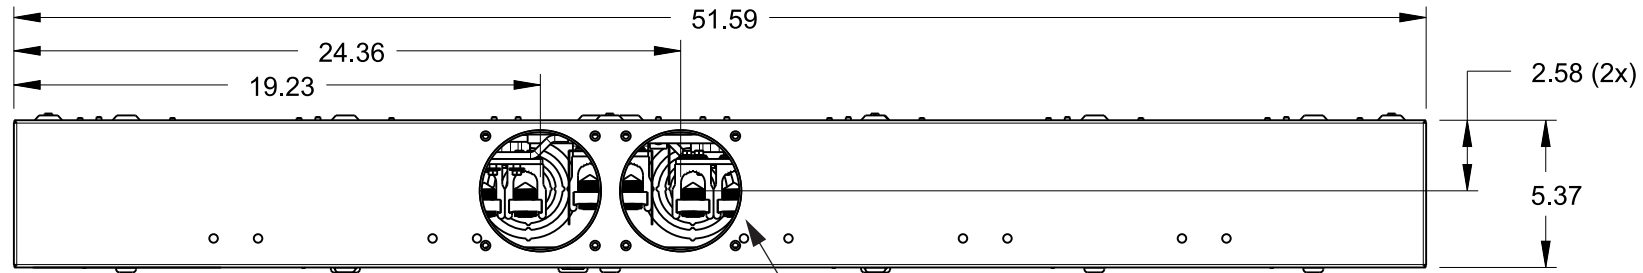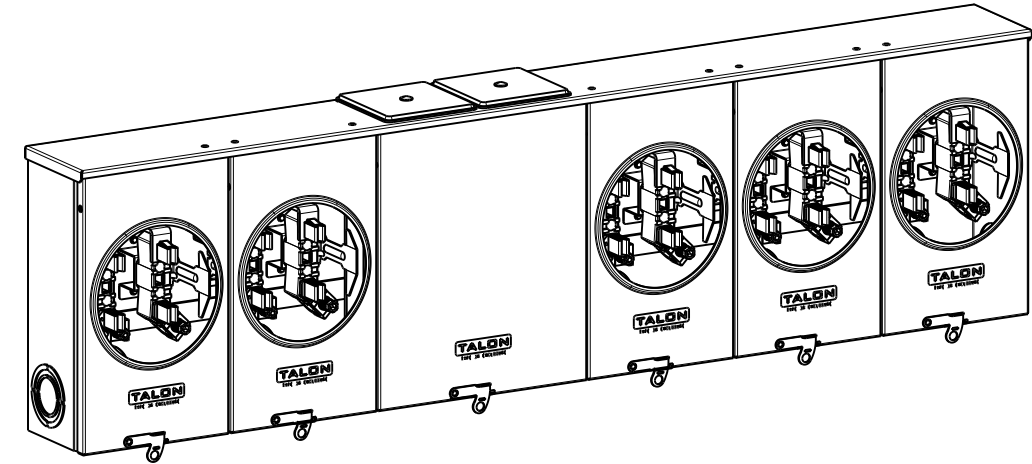

(2) HD HUB PROVISION
Factory Installed (Not Shown)

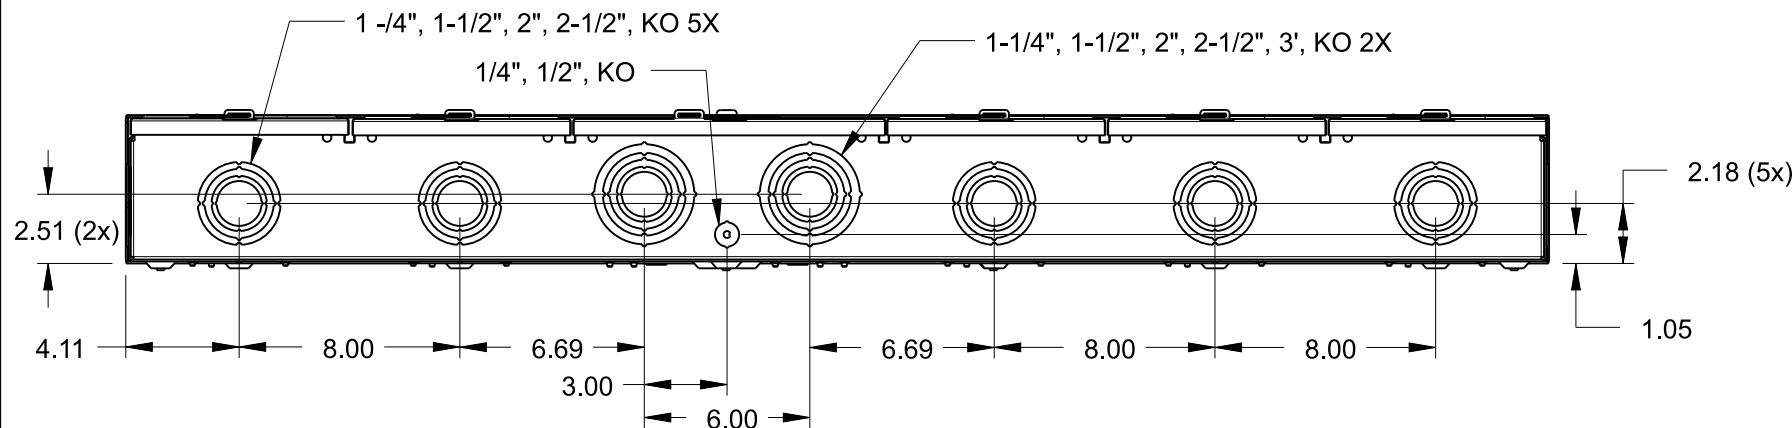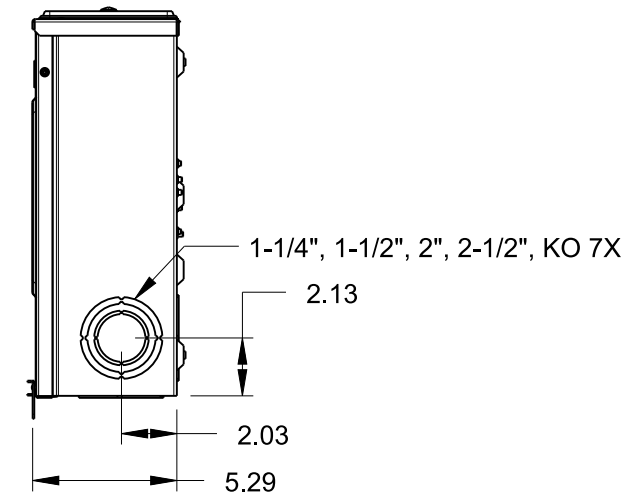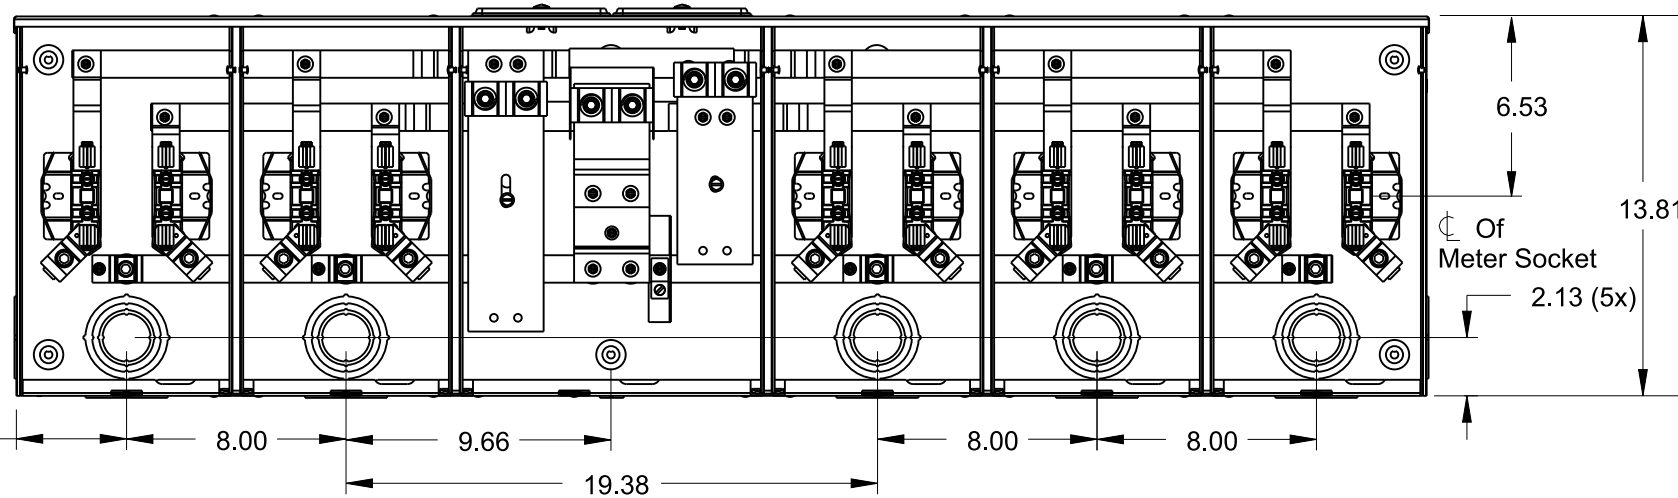

TALON

Multi-Position Metering

Description:
**200A Cont, 4 Jaw, A14, 600V AC,
Aluminum Enclosure**