

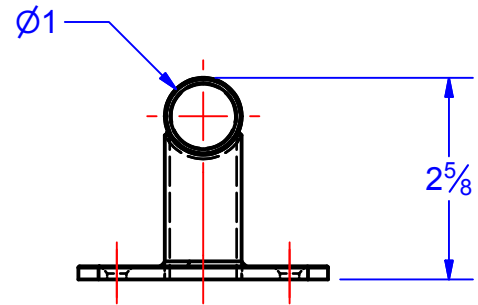
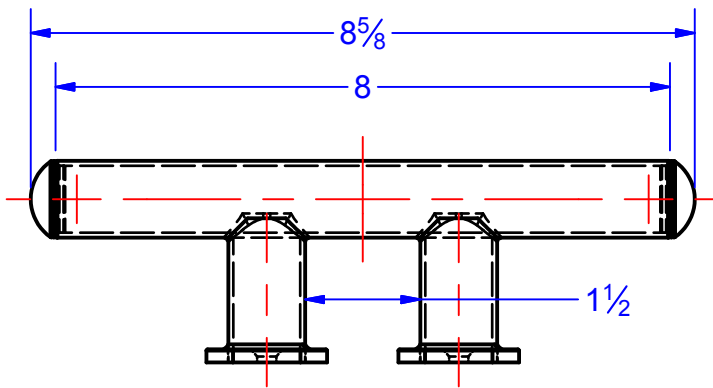


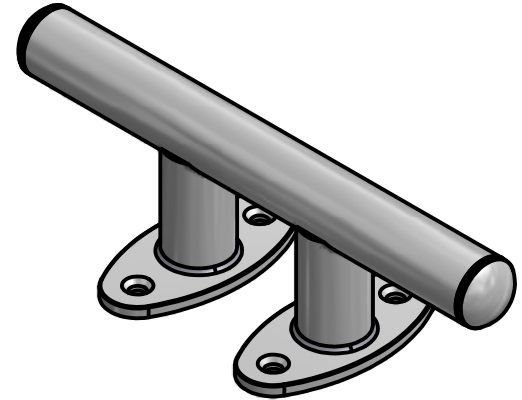

# TECHNICAL DATA SHEET

L-0708-SS  
8" DOCK CLEAT

DRAWN BY: K. R. Reinhart	5/5/2014
TOLERANCES:	
FRACTION : ± 1/8"	X.XX : ± 0.010
∠ : ± 1°	X.XXX : ± 0.005

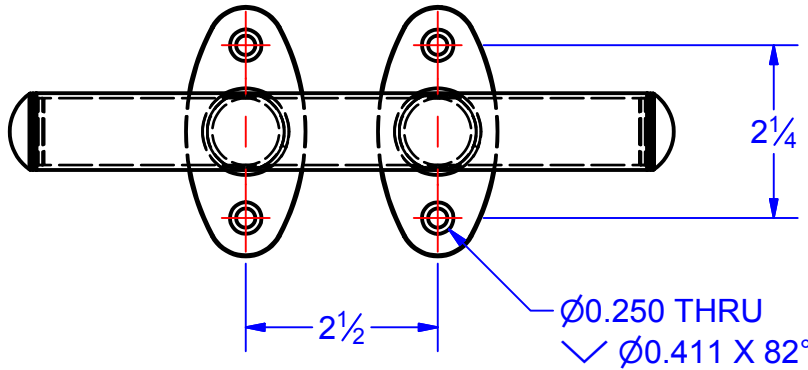

## CONSTRUCTION:

$\varnothing 1$ " x 0.065 WALL 304 STAINLESS STEEL TUBING. MOUNTING FLANGES ARE STAMPED FROM 7 GAUGE 304 STAINLESS. END CAPS ARE 303 STAINLESS STEEL. ALL PARTS ARE TIG WELDED COMPLETE AND PASSIVATED FOR CORROSION PROTECTION. OVERALL FINISH IS #4 SATIN. PULL TESTED TO 2,250 LBS. USING (4) 1/4" X 1 1/2" WOOD SCREWS.

## INSTALLATION:

CLEAT CAN BE SURFACE MOUNTED TO DOCK OR POST WITH (4) FLAT HEAD SCREWS (NOT PROVIDED). SEE DRAWING FOR SCREW LOCATIONS.

## OPERATION:

CONVENTIONAL, MAXIMUM PASS THROUGH BETWEEN POSTS IS 1 1/2". CLEAT CAN ALSO BE ORDERED WITH POLYESTER POWDER COATING FOR AREAS WHERE HIGH VISIBILITY IS WANTED.

POWDER COATED CLEAT IS PART NUMBER L-0708-PC (SPECIFY COLOR) STANDARD COLORS AVAILABLE ARE SAFETY YELLOW AND WET WHITE. OTHER COLORS ARE AVAILABLE VIA SPECIAL ORDER.