


# PELI™ 9600

Wide-Angle Lighting System

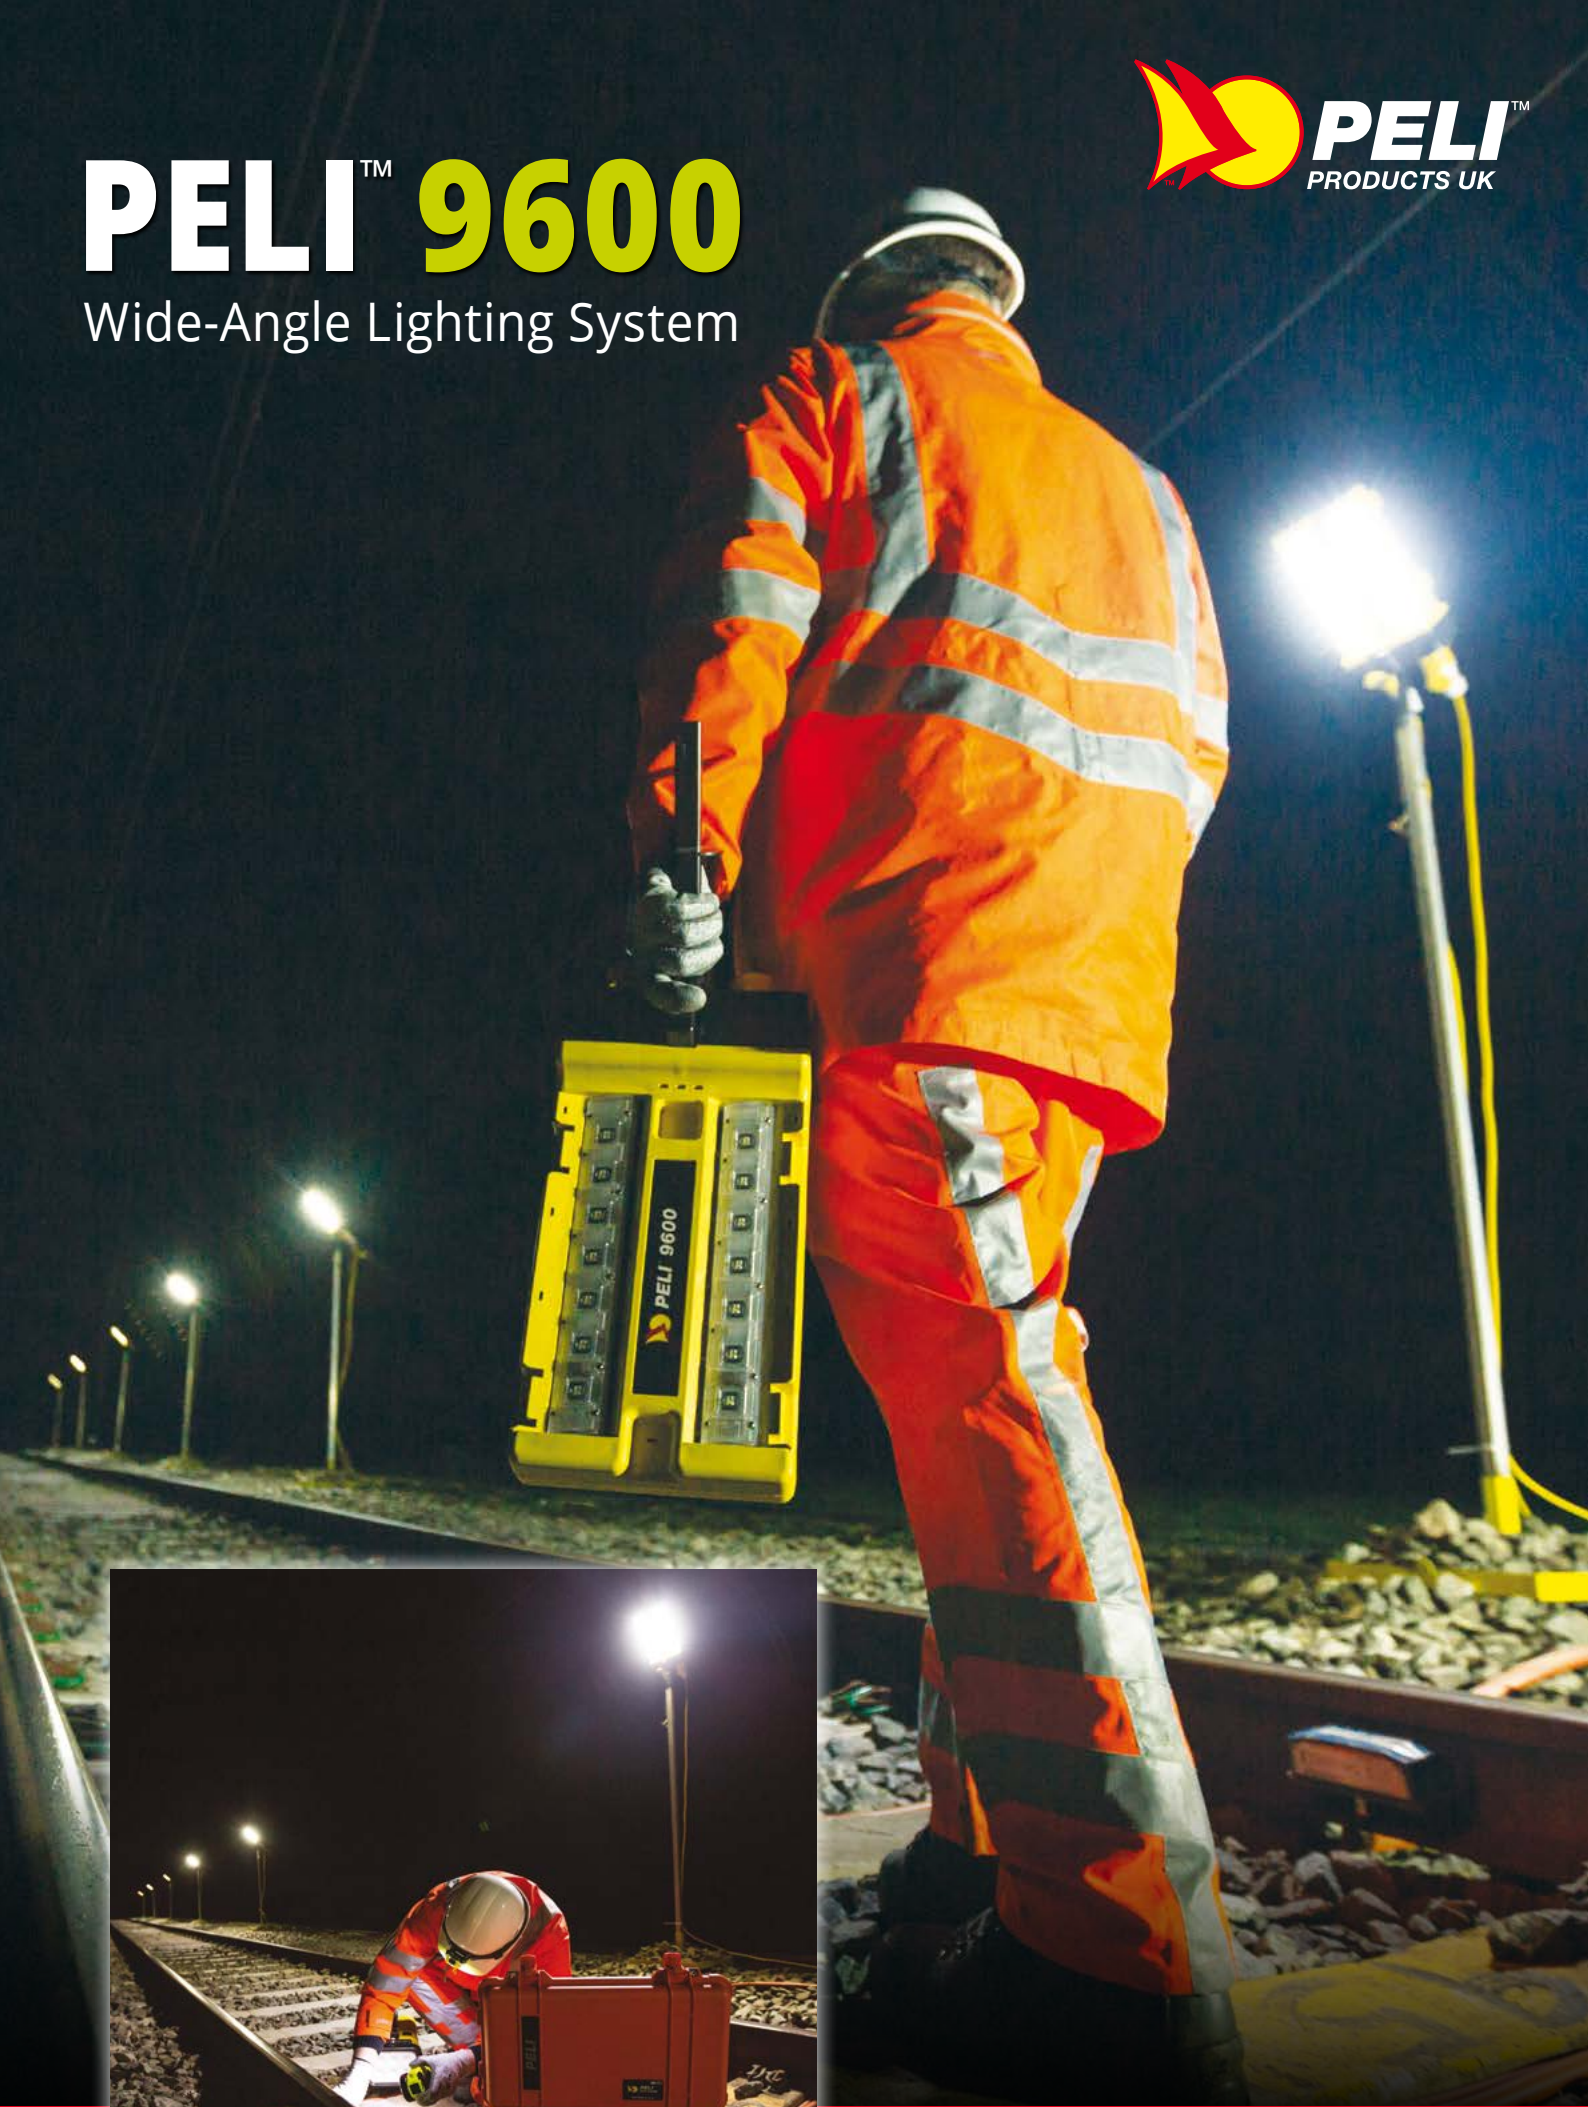

# PELI™ 9600

## Wide-Angle Lighting System

### WIDE AREA ILLUMINATION IN COMPACT FORM

#### POWERFUL

Peli's patented light engine utilises specialist optics to harness and distribute 100% of the light in the most efficient pattern possible. This creates a much brighter overlap between lights when spaced at 10 metre intervals, compared to rival products\*.

#### COMPACT

Linkable and lightweight, with a small footprint and wide beam coverage. The 9600 is an extremely practical alternative to lighting towers for covering wide areas.

#### TOUGH

Built Peli tough for use in the harshest of applications. The 9600 draws on Peli's rugged product DNA and features a durable waterproof design, with internal shock supports. Drop-tested to 3 metres.

#### EFFICIENT

The Interlocking Stack Pattern makes transportation and storage simple, whilst the highly efficient light engine requires less power, and therefore fewer generators compared to traditional lighting.


#### SAFE

A simple "Plug & Play" system, using common cables ensures quick and safe installation without specialist training. Sealed to IP67 for use in all weather environments, the 9600 also provides enhanced lux levels across a wide 10 metre span.

#### VERSATILE

Universal vertical/horizontal mounting option, for use with existing or Peli-supplied adjustable pole systems. Mount on fences/walls for access lighting, or suspend overhead in temporary shelters.

*\*Comparative test data available, on request.*

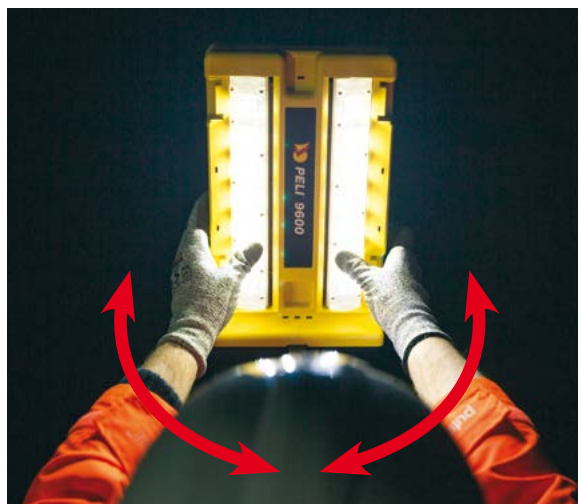

User-adjustable light pattern



*System can extend to  
3 metres in height*



*Heads interlock for safe, secure  
and stable transit/storage*





Product Codes:  
 Head: 9600-000-245  
 Pole: 9600-624-000  
 Base: 9600-305-000  
 Cable: 9600-303-015

## FEATURES

- Illuminate over 500 linear metres, from a single generator\*
- Connect multiple light heads from one power source
- Patented Peli light engine: User-adjustable light pattern
- Can extend up to 3 metres
- Peli Case rugged: tough moulded body
- Drop tested to 3 metres (onto concrete)
- Waterproof to IP67\*\*
- Inter-lockable stacking pattern
- Tie points & cable control for fence/tunnel installation
- Tough recessed lenses & internal shock supports

## BENEFITS

- Reduced costs and environmental impact
- Wider work area: dark spots eliminated (reduce slips/trips/falls)
- Enhanced illumination for workers
- Low power (fewer generators)
- Reduced fuel consumption
- Reduced breakages/longer service/less downtime
- Compact & easy to transport/deploy (140pcs per pallet = 1.4km)
- Maintenance free
- Retro-Fit on to existing stocked inventory such as Link Light bases and poles

## SPECIFICATIONS

- 460 x 210 x 130 mm
- 14 LEDs per light head
- 3000 Lumens
- Weight 3.82 kg (head only)
- Colour temp: 6200K (daylight)
- 24W power consumption
- Universal input voltage: 90-260V
- CE Approved for use on UK Industrial Generator & Stored-Power Systems

\*Subject to condition/capacity of generator.

\*\*Main body IP67. IE 16A connector rated to IP44.



Our full range of products is available to buy online: **PELIProducts.co.uk**

FOR AREA LIGHTING PRODUCTS GUARANTEE INFORMATION: PLEASE SEE PELIPRODUCTS.CO.UK/RETURNS

### Peli Products (UK) Ltd

Peli House, Peakdale Road, Brookfield, Glossop SK13 6LQ  
 T: 01457 869999 E: sales@peliproducts.co.uk

©2019 Peli Products (UK) Ltd. All contents included should be considered as guidelines and only valid at the time of publication.

All trademarks and logos displayed herein are registered and unregistered trademarks of Peli Products, SL and others.



Certificate Number #00074  
 ISO9001

