

M10 公直头/母直头, 注塑成型式, 快速插拔式
M10 male /female molded cable, straight, Snap-in Type

RoHS


IP65




技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +80°C(静态温度/fixed installation); -20°C ~ +80°C(动态温度/flexible installation)
胶芯材料/Connector insert	PA+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
外模材料/Over-molding	TPU
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥20MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
插拔次数/Mating endurance	>500次/Cycles

M9公头/Male molded cable

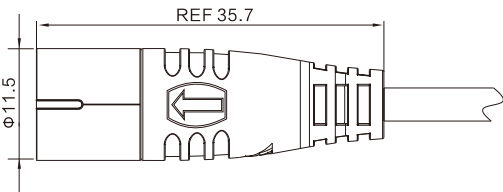

M9直头/Female molded cable

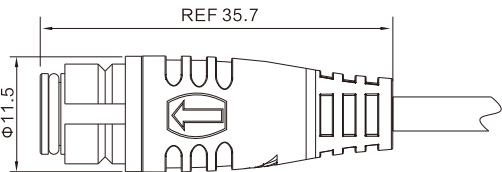

订货信息/Ordering information

芯数/Contacts	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	线材外被 Cable jacket	公头型号/Male model	母头型号/Female model
		交流(A/C)	直流(D/C)	AWG	mm ²				
 	2A	60V	72V	26	0.14	PVC	PVC	QA-VS10-5P-MA-3.0M/BK	QA-VS10-5P-FA-3.0M/BK
							PUR	QA-US10-5P-MA-3.0M/BK	QA-US10-5P-FA-3.0M/BK
 	1A	30V	30V	26	0.14	PVC	PVC	QA-VS10-9P-MA-3.0M/BK	QA-VS10-9P-FA-3.0M/BK
							PUR	QA-US10-9P-MA-3.0M/BK	QA-US10-9P-FA-3.0M/BK