



2322320803_Single Phase Bus Cable(4mm²,H07,2m)

RoHS

CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update part name; Update dimensions	0.1	YFT 2022-6-13
②	Update electrical parameters	0.2	YFT 2022-6-30



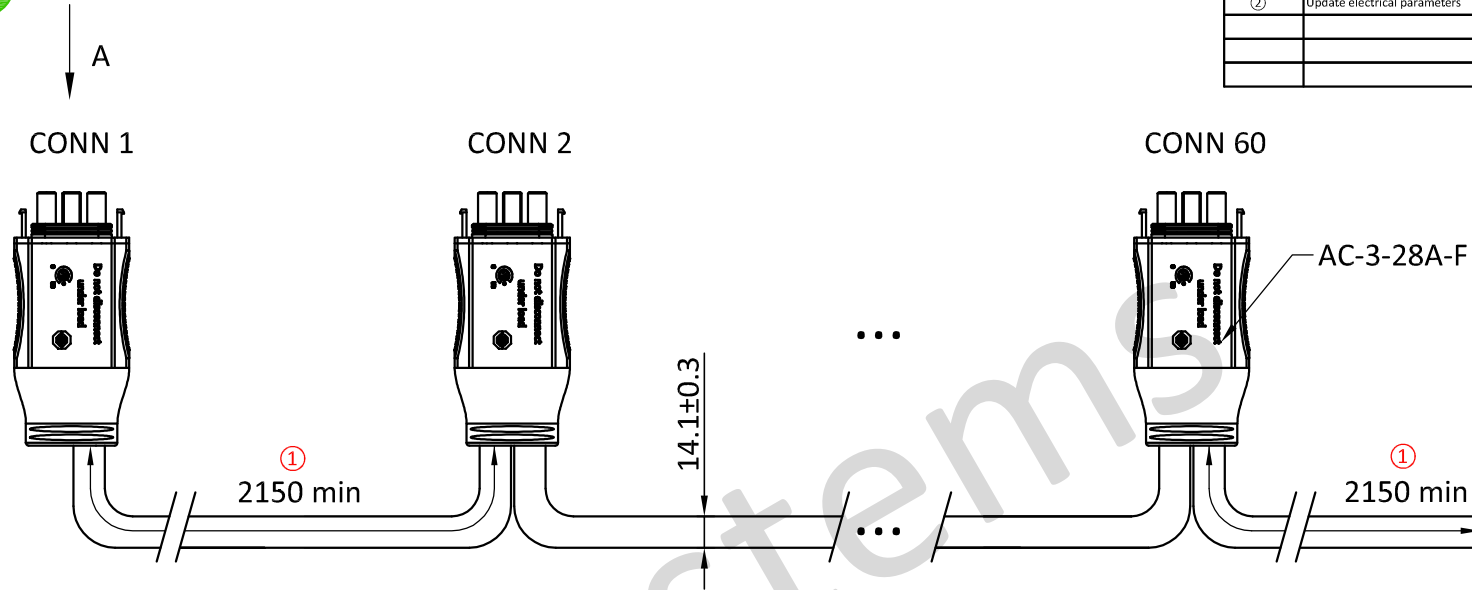

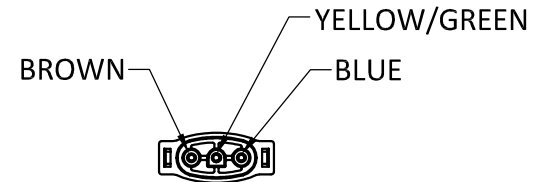
VIEW A



Notes:

1. Cable marking: ◀VDE▶ 40020334 H07RN-F 450/750V 3×4mm² KTL SU01048-6004 SAA202714 GP-85-PCP 0.6/1.0KV HEAVY DUTY CCC A005618 60245 IEC 66(YCW) 450/750V 3×4mm² WUXI ZHONGHUI WIRE & CABLE CO., LTD
2. Waterproof rating: IP67
3. A series of bus cable contains 60 connectors, each connector spacing is 2150mm
4. Wiring: BROWN-L, BLUE-N, YELLOW/GREEN-PE
5. Electrical parameters:
 - Working voltage rating: 600V
 - Working current rating cable 28A
 - Resistance voltage: AC 2500V 50mA 1 Minute
 - Conductor resistance: 4.95Ω/km
6. Use blank cartons for packaging

TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL		 NAME Single Phase Bus Cable ① (4mm ² ,H07,2m)
>0-100 ±5	>2500-3500 ±45			
>100-500 ±10	>3500-4500 ±50			
>500-900 ±15	>4500-5500 ±65			
>900-1300 ±25	>5500-6500 ±80			
>1300-1800 ±30	>6500-8000 ±90			
>1800-2500 ±35	>8000-10000 ±100			
DWN.	UNIT mm			
CHK.	SHEET -- OF --	REV.	0.2	
DRAWING NO.				