



2322604802_3-phase 5C Bus Cable(2.5mm²,H07,2.4m)



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update dimensions	0.1	YFT 2022-10-21

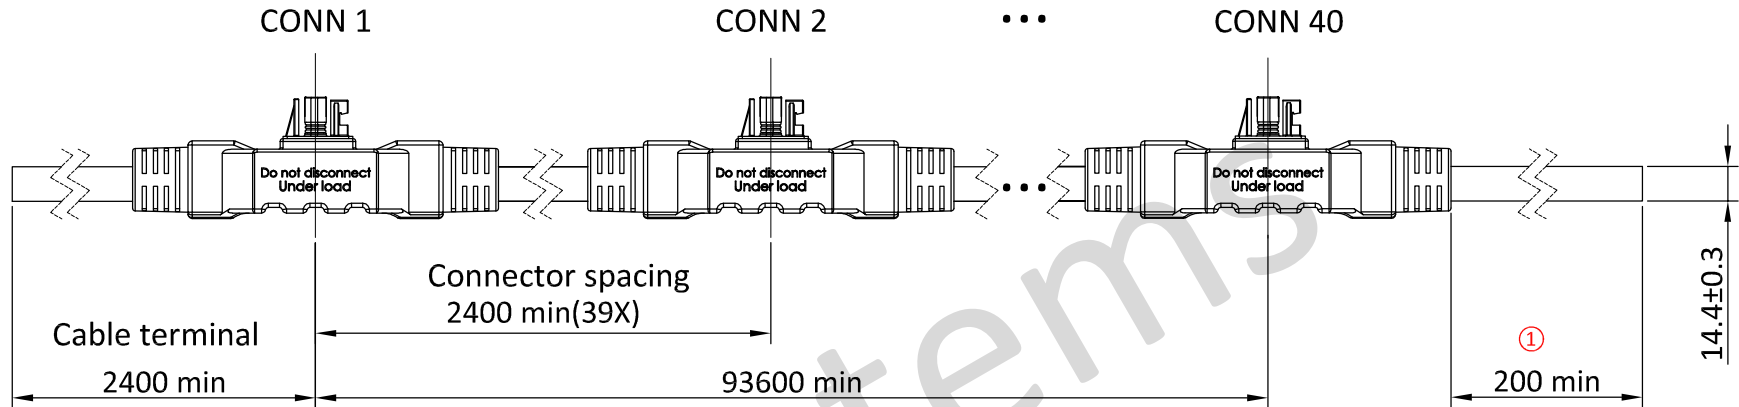


Connector pin view
2:1



PE N L3 L2 L1
YELLOW/GREEN BLUE GRAY BLACK BROWN

Connector back view

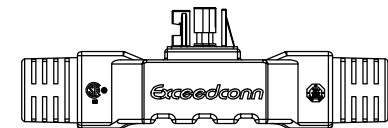

NOTES:

Electric testing:

- CABLE: 5C×2.5mm² H07RN-F, VDE certification, UV resistance.
CABLE MARKING: <VDE> 40015173 H07RN-F 5G2.5mm² 450/750V RECHER
- Dielectric withstand voltage test: DC 4000V, leakage current 5mA, duration 60s;
- Contact resistance: ≤20mΩ;
- Insulation resistance: ≥500MΩ;
- Wiring: BROWN--L1, BLACK--L2, GRAY--L3, BLUE--N, YELLOW/GREEN--PE;

Mechanical property:

- Insert and draw frequency: ≥50 times;

Environmental performance:

- Waterproof rating: IP67;
- Environmental requirements: comply with RoHS requirements;

Others:

- A series of bus cable contains 40T, each connector spacing is 2400mm;
- The 200N·60S tension at the t connector does not affect electrical and waterproof performance;
- The surface has no abrasion, scratches, deformation and other defects.
- Use blank cartons for packaging and blue label

TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL		 ALTERNATE ENERGY POWER
X.	±3.00	X°	±3.00°	
.X	±2.00	.X°	±2.00°	
.XX	±1.00	.XX°	±.00°	
.XXX	±0.50	.XXX°	±0.50°	DRAWING NO.
DWN.	UNIT	mm		
CHK.	SHEET	OF	REV.	0.1