

# WIFI Receiver

## Operation Instruction

Please read this manual carefully before using it

### ⚠️ Precautions before installation

While complying with the effective electricity standard, please comply with the following regulations.

- The main power must be cut off before installation to ensure safe operation.
- Maintain a distance of more than 0.3m between the receiver and the ceiling.
- Avoid electrostatic interference, static electricity will damage some electronic components.
- After installation, ensure that the cable carrier is not affected by longitudinal forces.
- Do not let the metal contact the receiver, otherwise it will affect the reception distance.
- Maintain a distance of more than 1.5m between the receiver and the ground.
- Please use soft wire and cable.
- Transmission range: empty place  $\leq 80m$ , indoor  $\leq 30m$ .
- Maintain a distance of more than 1.5m between the receiver and the motor.

## 1. Description of Product




## 2. Parameters of Product

Model	Input voltage	Load power	Operating mode	Receiving/transmitting frequency	
HC-E015-D24	AC110V/220V 50-60Hz	$\leq 72W$	remote control/manual control/wind, light and rain	433.92MHz	Number of emitters allowed: $\leq 8$ pcs Working temperature: $-30^{\circ}C \sim +65^{\circ}C$ receive sensitivity: $-110dBm$
HC-E015-A220		$\leq 500W$	remote control/manual control/rain sensor		

## 3. Wiring of Product

Please check the specific type of wiring before use.

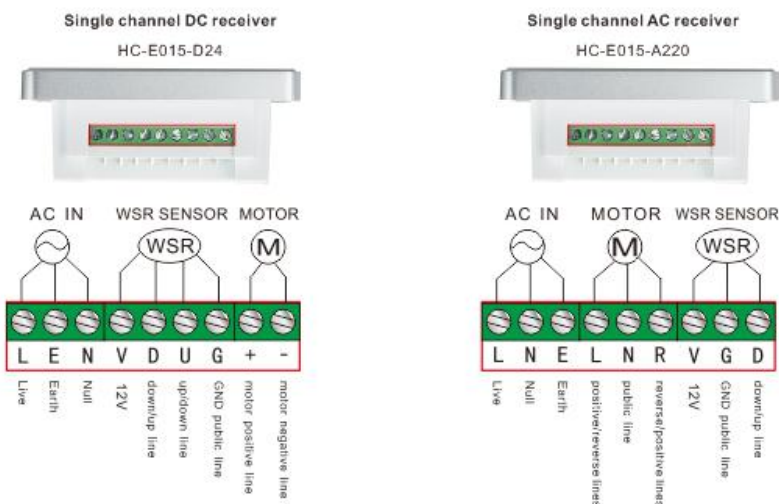

## 4. Fault Handling

Number	The fault phenomenon	Solution
1	The indicator lights up when operating the transmitter, but the receiver does not act accordingly	1. Check the receiver wiring is correct 2. Check the program settings are correct
2	The indicator light on the transmitter is not on or dark	1. Check the battery installation is correct 2. Replace the battery
3	The transmitter and receiver work normally, but the motor does not work	1. Check whether the motor wiring is correct 2. Check the motor for damage

# 5. Operating Instructions

## A. Download the APP of Tuya Smart



(Mobile control)

Tuya Smart

## B. The WIFI controller is paired with the phone

Note: Make sure the controller is energized before coding

### 1. The WIFI controller is paired with the phone



### 2. Create your account number and set your login password

(If you have registered an account before, you can directly enter your account and password and click login)



create an account    login ID

### 7. Click "OK", automatically enter the network distribution state, and the network distribution display "Add device successfully".

### 8. After successful connection, you can control the window action on your mobile phone.



### 3. Enter the main interface of App

### 4. click add ddevice or "+"

### 5. Select the left category "Small Appliances" -- "Doors and Windows"



### 6. Click "Confirm indicator is flashing", enter the WIFI password, long press the controller stop button for 8 seconds, and the backlight red light flashes.

