

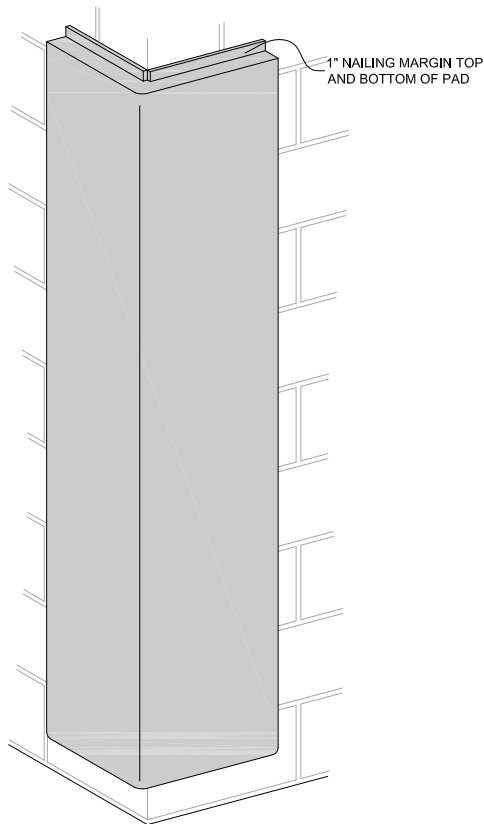
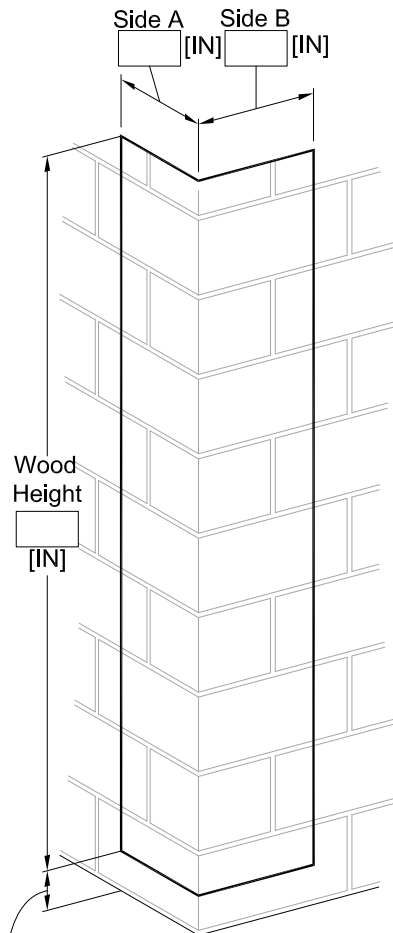


2" FIRESAFE 2-SIDED CORNER PAD

Custom Rigid Back Corner Pad

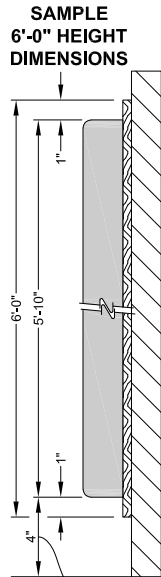

CORNER PAD - ADD 2 SIDES AND 5" CORNER

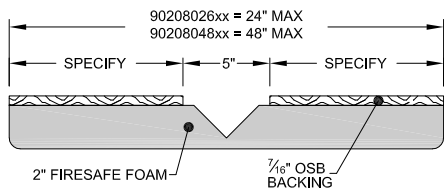

MAXIMUM ALLOWABLE DIMENSION TO MINIMIZE THE POSSIBILITY OF BODY CONTACT WITH THE WALL (Per ASTM Standard Specification F2440)

NAILING MARGINS?

- NONE
- TOP & BOTTOM
- TOP
- BOTTOM

Pad numbers are calculated by adding the lengths of each side and the corner allowances. Maximum total width is 48". Pads requiring more than this dimension must be split into two or more pads.

Optional Additional Items to Specify

See Page No. G-343 for specification on Porter No. 343 and 344 Molded Inserts.

See Page No. G-347-3 for specification on Porter No. 347100, 347300 and 347400 Wall Attachment Fittings.

COLOR SELECTION

<input type="checkbox"/>	01 - Light Blue	<input type="checkbox"/>	09 - Gray
<input type="checkbox"/>	02 - Royal Blue	<input type="checkbox"/>	10 - Maroon
<input type="checkbox"/>	03 - Red	<input type="checkbox"/>	11 - Purple
<input type="checkbox"/>	04 - White	<input type="checkbox"/>	12 - Black
<input type="checkbox"/>	05 - Orange	<input type="checkbox"/>	13 - Navy Blue
<input type="checkbox"/>	06 - Yellow Gold	<input type="checkbox"/>	14 - Kelly Green
<input type="checkbox"/>	08 - Tan	<input type="checkbox"/>	15 - Dark Green

SELECT PAD:

- 90208026xx - 24" x 72" OR LESS CORNER PAD - RIGID BACK
- 90208048xx - 48" x 96" OR LESS CORNER PAD - RIGID BACK

porter[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2021 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

porter
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90208

12/9/2021

2" FIRESAFE 2-SIDED CORNER PAD

Custom Rigid Back Corner Pad

SPECIFICATIONS

PORTER No. 90208026xx - 2" FIRESAFE CORNER PAD
24"x72" (EACH)

Pads shall be fabricated to specified dimensions, with a "V" cut in filler and backing board as required, to facilitate installation and provide a neat, custom fit on exposed wall corners. Pads are two-sided (corner).

Pads will be constructed of 2" fire retardant foam cemented to 7/16" backing board and covered with flame-retardant, vinyl-coated polyester folded and stapled securely to back of oriented strand board.

Entire pad assembly has been tested and meets the requirements of NFPA 101 Life Safety Code for Class A rating (flame spread 0-25, smoke development 0-450) when tested in accordance with ASTM E-84 (also published as NFPA-255, ANSI 2.5, UBC 8-1, and UL 723). Entire pad assembly has been tested and meets the criteria set forth in the 2003 IBC section 803.2.1 when tested in accordance with NFPA 286, NFPA does not publish pass/fail criteria.

Entire face of panel, including the 1" nailing margins, shall be upholstered in a heavy (19-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall have a tear strength of 100 P.S.I. and shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering shall be folded and stapled securely to backside of oriented strand board. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all pads. Attachment methods including but not limited to 1" nailing margins and/or "Z" clips supplied as specified. Installation shall be made in accordance with current factory suggested procedures.

Certifications:

- ASTM E-84 Class A Fire Rating
- NFPA 286

PORTER No. 90208048xx - 2" FIRESAFE CORNER PAD
48"x96" (EACH)

Same specifications as above except 48" x 96" or less in size.

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90208