GILL
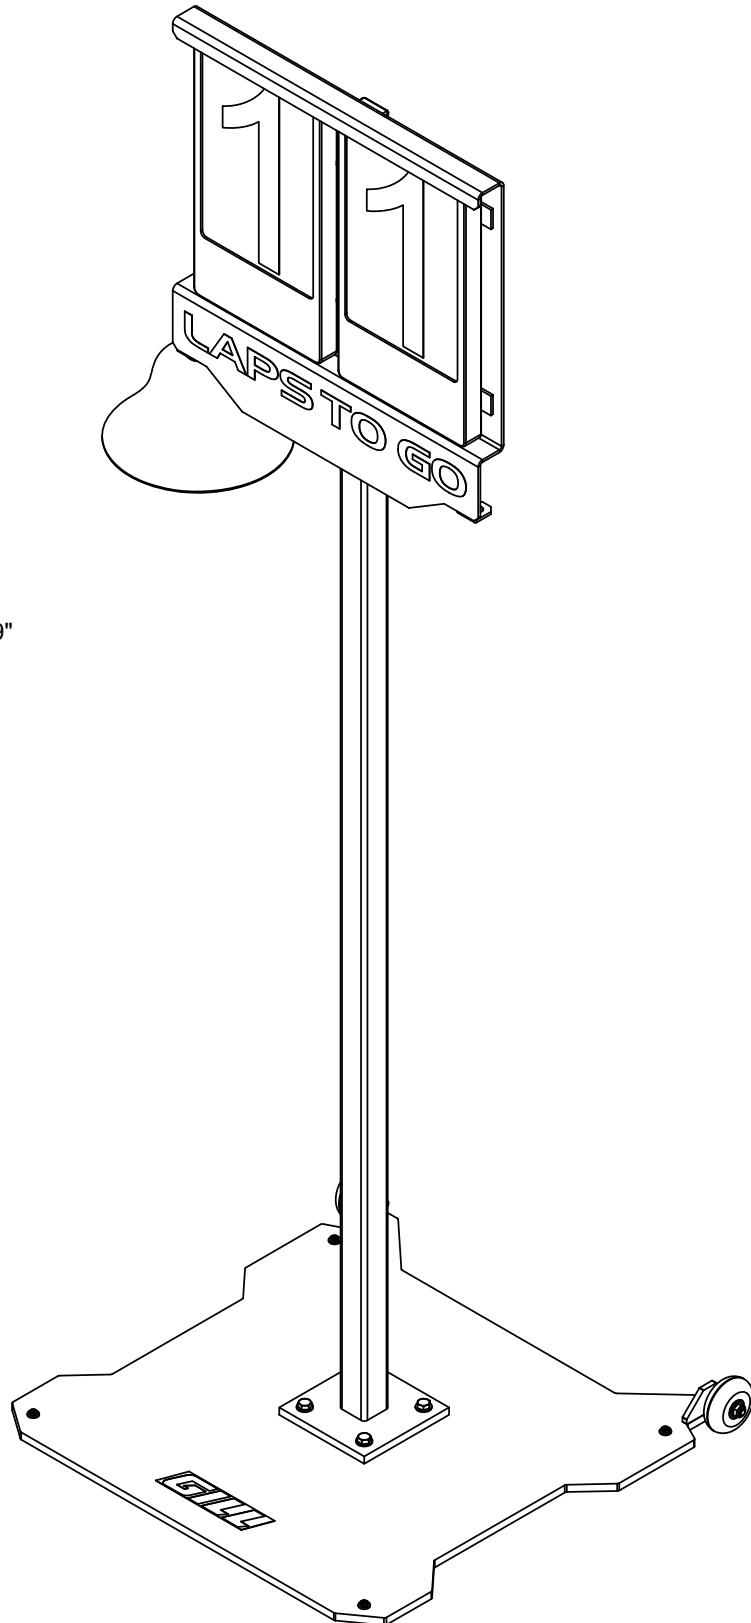
www.gillathletics.com
800-637-3090

The Lap Counter stands 5'-8" tall, with two large 9" numerals for visibility and a large bell.

Display frame and upright are aluminum with powder coat finish.

The 45lb powder coated steel base is 22" square with tip and roll wheels.

Parts:
BASE00151 - BASE ASSEMBLY
79320 - Upright Post & Bell
79310 - Display Frame

⚠ **WARNING**: This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

www.gillathletics.com
800-637-3090

ASSEMBLE BASE AS SHOWN BELOW

#	Part #	Description	Qty.
1	BASE00148	PERFORMANCE INDICATOR BASE WELDMENT; BLACK	1
2	HDWE030790E0	NYLOCK HEX NUT THIN- 6-32	4
3	Preferred Narrow FW 0.3125		8
4	HDWE050130E0	FLAT WASHER; #10; 1/4" ID X 1/2" OD; ZINC	4
5	HDWE06274	ROUND HEAD SCREW; #6-32 X 3/4"; PHIL DRIVE; SS	4
6	M1232	5/16"-18 Nylock Hex Nut	4
7	HBOLT 0.3125-18x2x2-C		2
8	M717B	Ball Bearing	4
9	M718	61 mm skate wheel	2
10	M726	Black Rubber Foot	4
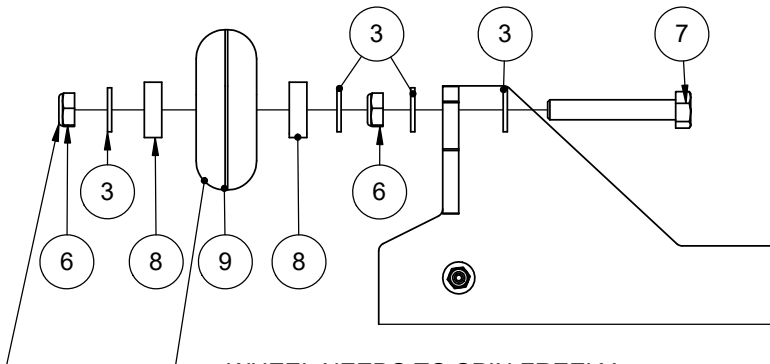
WHEEL NEEDS TO SPIN FREELY.
DO NOT THIGHTEN OUTSIDE
NUT AGAINST WHEEL.
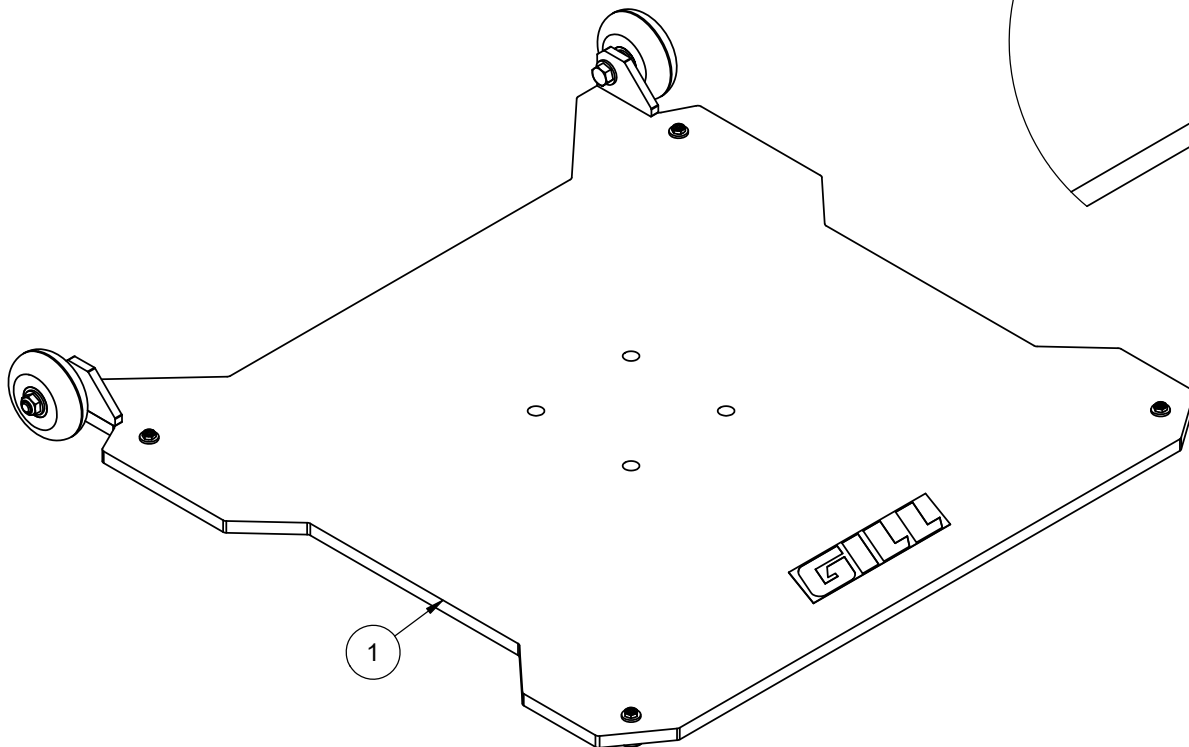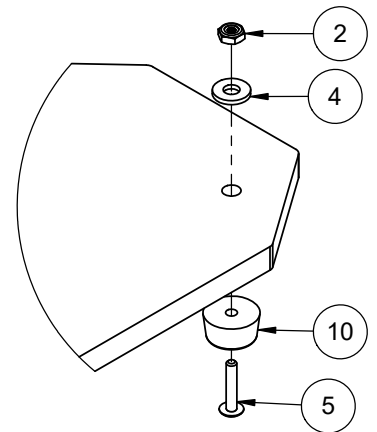
www.gillathletics.com
800-637-3090

ASSEMBLE UPRIGHT ONTO BASE AS SHOWN BELOW

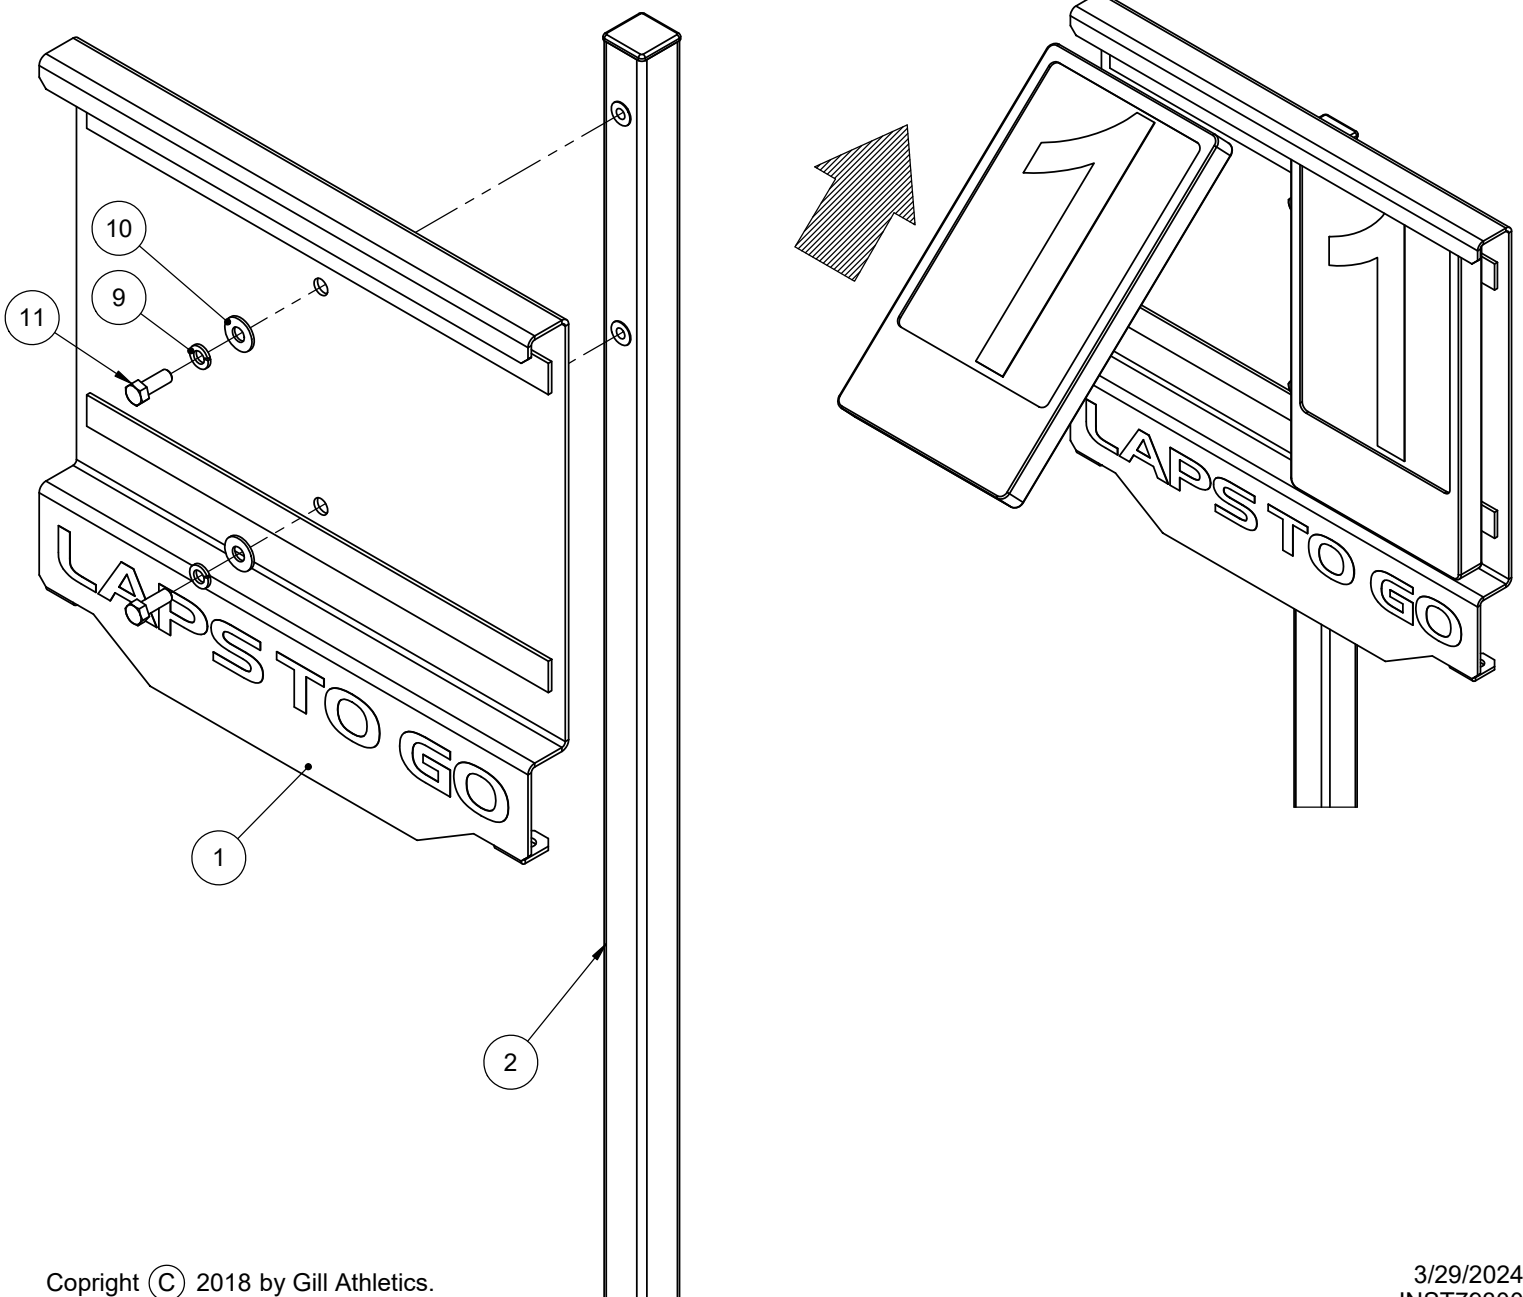| #	Part #	Description	Qty.
2	79320	LAP COUNTER UPRIGHT; ASSEMBLY	1
7	BASE00149	PERFORMANCE INDICATOR BASE ASSEMBLY	1
8	M2100	Bell and Gong	1
9	HDWE012440E0	HEX HEAD TAP BOLT; 5/16"-18 X 1-1/4"; ZINC; GRADE 5; FULL THREAD	4
10	Preferred Narrow FW 0.3125		8
11	M1232	5/16"-18 Nylock Hex Nut	4
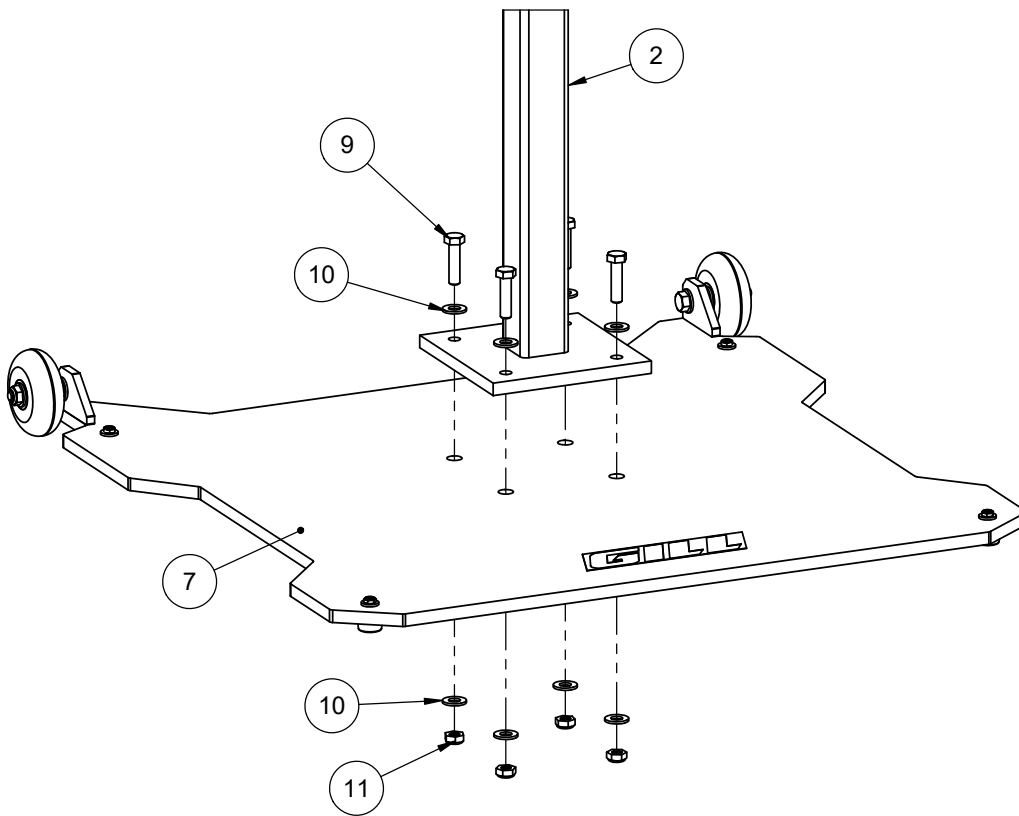
www.gillathletics.com
800-637-3090

MOUNT INDICATOR TO UPRIGHT, ADD DIGIT BOARDS AS SHOWN

#	Part #	Description	Qty.
1	79310	2 DIGIT POLE VAULT DISPLAY	1
2	79320	LAP COUNTER UPRIGHT; ASSEMBLY	1
9	M2807	3/8" Lock washer, Black	2
10	M2809	3/8" Flat Washer, Black	2
11	HBOLT 0.3750-16x1x1-C		2

GILL®

www.gillathletics.com
800-637-3090
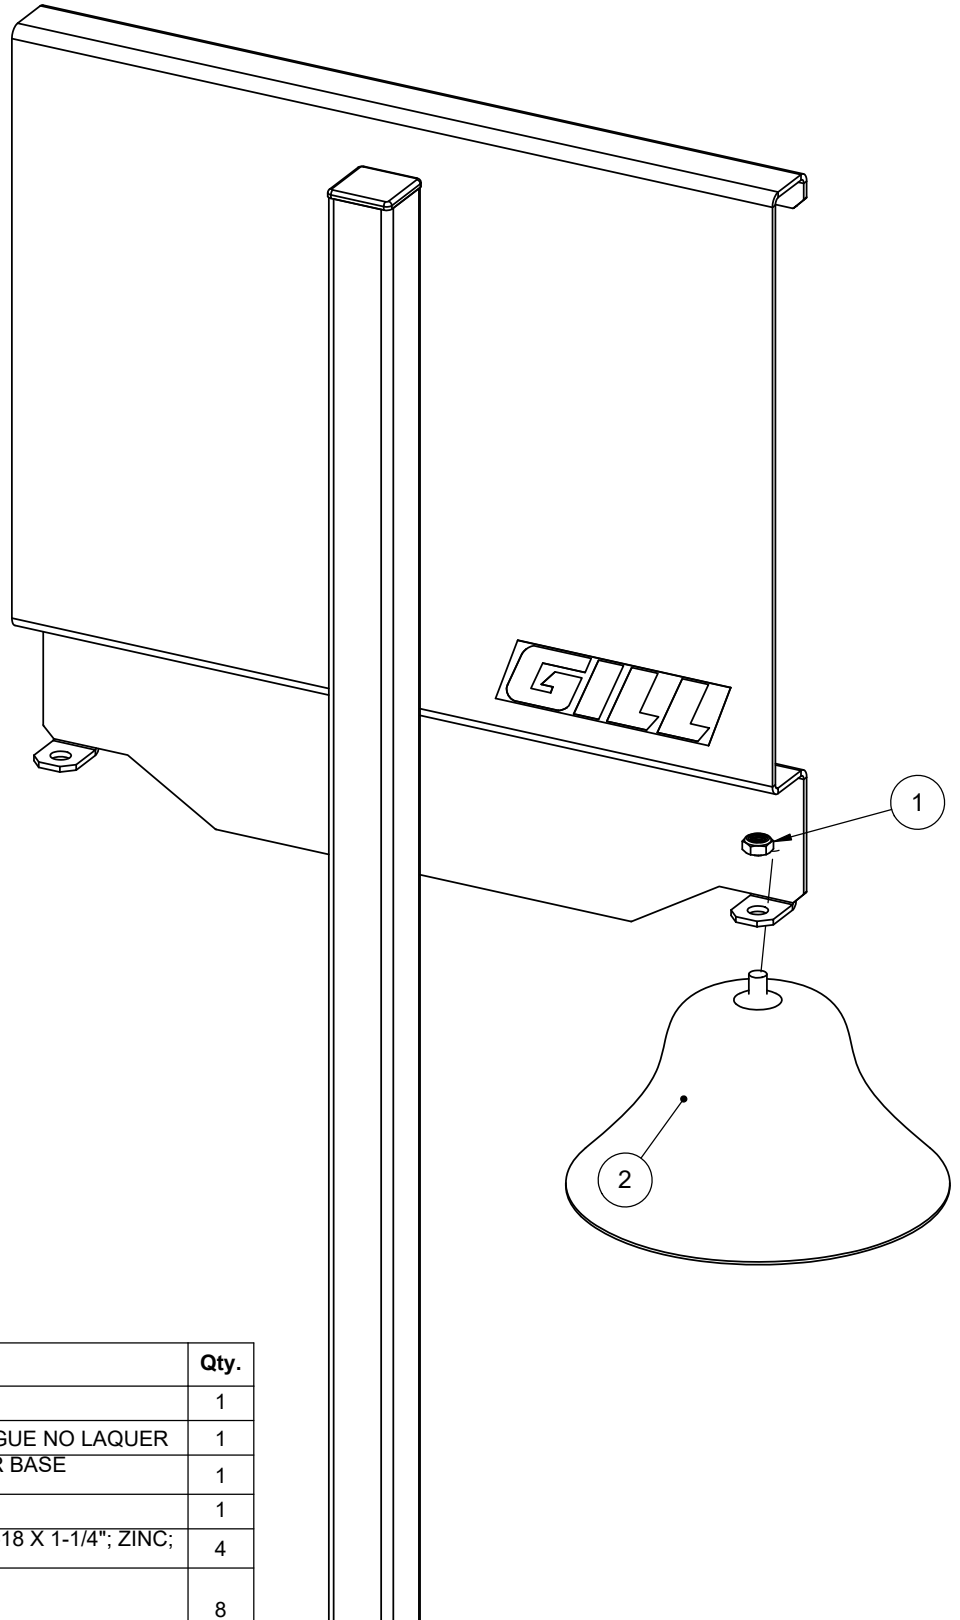
ATTACH BELL ONTO DISPLAY

#	Part #	Description	Qty.
1	M1235	3/8"-16 thin nylock hex nut	1
2	M2100	GONG NUT EYE BOLT TONGUE NO LAQUER	1
7	BASE00 149	PERFORMANCE INDICATOR BASE ASSEMBLY	1
8	M2100	Bell and Gong	1
9	HDWE01 2440E0	HEX HEAD TAP BOLT; 5/16"-18 X 1-1/4"; ZINC; GRADE 5; FULL THREAD	4
10	Preferred Narrow FW 0.3125		8
11	M1232	5/16"-18 Nylock Hex Nut	4