


DAVID SHAW × Nightworks®

DUET SMALL PENDANT (IP20)

Installation guide

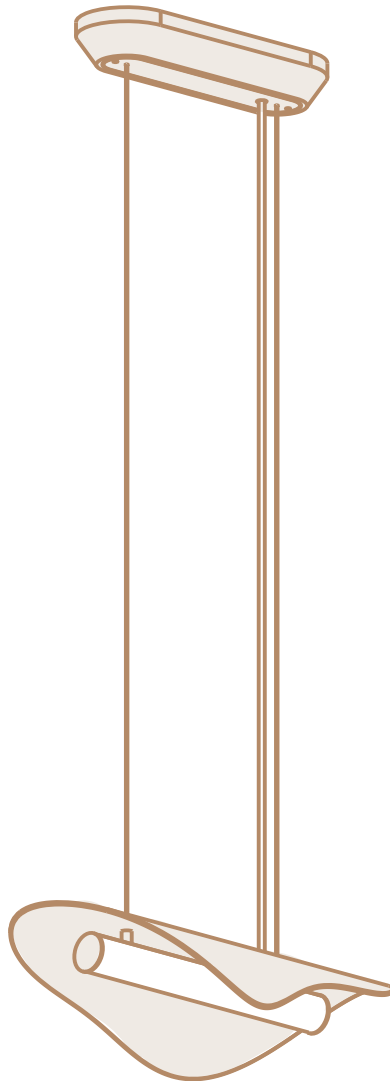

DANGER electric shock risk. Installation must be conducted by a licensed electrician.



LOW VOLTAGE - Do not wire light fitting directly to mains power.

INSTALL FITTING

 **Ensure gloves are worn when handling natural brass products.**

- 1: Remove all items from box. Uncoil and straighten suspension cables and power cord.
- 2: Using a flat head screw driver, remove both of the M4 screws from the canopy cover plate and thread the plate onto the suspension cables and power cable on the light fitting.
- 3: (Optional) Pre-drill and insert drywall anchors as required.
- 4: Install canopy to ceiling using timber screws.
- 5: Connect mains supply to driver. Ensure to connect earth to the earth terminal located on the ceiling bracket.
- 6: Trim suspension cables to preferred length as shown. Ensure that the grip is secure. Proceed to trim power cable with adequate room for wiring to the driver.
- 7: Secure suspension cables by threading the suspension pieces onto the threads mounted inside the canopy.
8. Connect LED power cord to driver.

NOTE: The power cord should not hold any weight of the pendant. It should be pulled so it straight with no tension.

- 9: Secure cover plate on the canopy.
- 10: Wipe down fitting with clean dry cloth.
- 11: Test fitting.

