
DAVID SHAW × Nightworks[®]

DUET TABLE LIGHT (IP20)

Installation guide

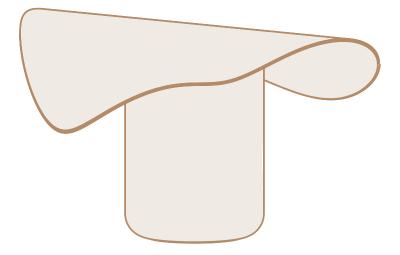

INSTALL FITTING

 $\int_{-\infty}^{\infty}$ Ensure gloves are worn when handling natural brass products.

- I: Remove all items from box.
- 2: Affix the two locator pins onto the hood by screwing them on the underside of the hood.
- 3: Ensure LED globe is placed in lamp holder.
- 4: Place hood on the timber base using the two locator pins as shown.
- 5: Wipe down fitting with clean dry cloth.
- 6: Plug in fitting.

NOTE: this LED is replaceable with a G9 globe. Simply remove the hood and replace globe if needed.

