
Recommended frequency of SOOT/CREOSOTE REMOVER use based on wood type burned



Tend to be more porous woods with oils and resins that coat fireplace or stove in soot/creosote

> **RUTLAND®** Tip Use soot/creosote remover 6-7 times per week

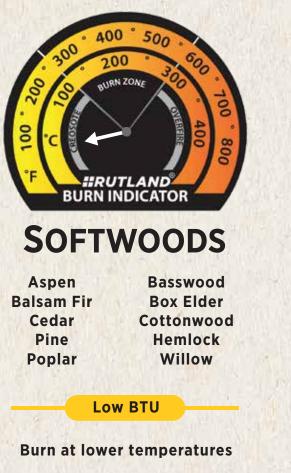

SOFT HARDWOODS

Birch	Hackberry
Cherry	Spruce
Douglas Fir	Sycamore
Elm	Walnut
Red Maple	Yew

Mid BTU

May contain some oils and resins that create some soot/creosote

RUTLAND® Tip

Use soot/creosote remover 2-3 times per week



HARDWOODS

Ash	Apple
Beech	Dogwood
Hickory	Hawthorn
Oak	Mulberry
Sugar Maple	Osage Orange

High BTU

Burn at higher temperatures

Dry, dense woods that burn cleanly and create very little soot/creosote

RUTLAND® Tip Use soot/creosote remover 1 time per week

Estimates based on assumption that wood is burned daily during burn season. Actual BTUs may vary depending on region and specific type of wood. The potential exists for creosote buildup regardless of the wood type used if the wood is burning below 200°F.



Trusted in the home and by professionals for over 130 years



QUESTIONS? Call RUTLAND® Customer Service at 800-544-1307!