



Grade 10 Short Link Chain


Mechanical properties in accordance with EN818-2 +25% and ASTM973.

Chemical composition and dimensions conform to EN818-2.

The Grade 10 chain is embossed with manufacturer's mark and grade (MA10) and class leading batch code traceability.

All sizes for the William Hackett Grade 10 are proof tested at manufacture to 2.5 times the given working load limit and have a range of diameters from 6mm – 32mm. The Hackett Grade 10 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

Surface Finish: Blue Painted.

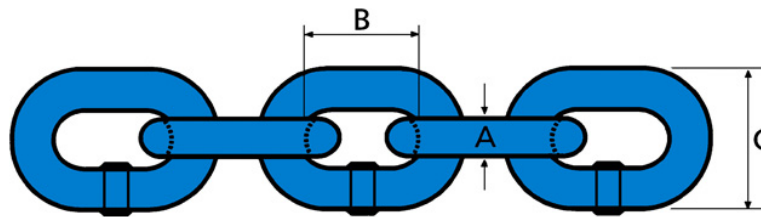

METRIC SPECIFICATIONS

Part Code	A mm (Nominal)	B mm	C mm	WLL tonnes	kgs per metre	Metres per drum
ASV.060.5	6	18	22.0	1.4	0.80	500
ASV.080.5	8	24	29.6	2.5	1.51	350
ASV.100.5	10	30	37.0	4.0	2.35	250
ASV.130.5	13	39	48.1	6.7	3.99	150
ASV.160.5	16	48	59.2	10.0	5.99	100
ASV.200.5	20	60	74.0	16.0	9.76	60
ASV.220.5	22	66	81.4	19.0	11.70	50
ASV.260.5	26	78	96.2	26.5	16.12	30
ASV.320.5	32	96	118.0	40.0	24.80	25

IMPERIAL SPECIFICATIONS

Part Code	A inch (Nominal)	B inch	C inch	WLL lbs	lbs per ft	feet per drum
ASV.060.5	0.24	0.70	0.87	3000	0.54	1640
ASV.080.5	0.31	0.94	1.16	5700	1.00	1148
ASV.100.5	0.39	1.18	1.45	8800	1.58	820
ASV.130.5	0.51	1.54	1.90	15000	2.68	492
ASV.160.5	0.63	1.89	2.33	22600	4.02	328
ASV.200.5	0.79	2.36	2.91	35300	6.56	196
ASV.220.5	0.87	2.59	3.20	42700	7.86	164
ASV.260.5	1.02	3.07	3.78	59600	10.83	98
ASV.320.5	1.26	3.78	4.65	90400	16.66	100



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU
 Email: liftingsales@williamhackett.co.uk Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204

Web: www.williamhackett.co.uk



Better connected with William Hackett