


Hack10 Eye Grab Hook

All William Hackett Hack10 lifting components comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

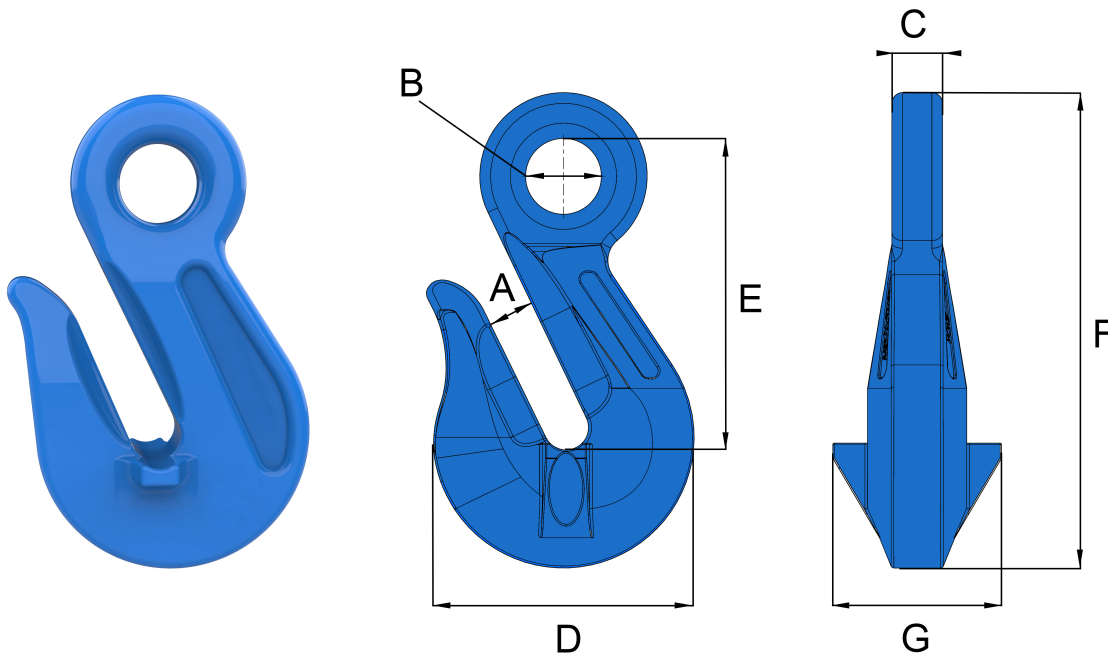

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	WLL tonnes	Box Quantity	Mass kg
10-H06-06	6	8.0	13.5	8.0	46.5	46.0	73.0	25.5	1.4	100	0.15
10-H06-08	8	11.0	17.5	9.5	53.0	61.0	93.0	33.5	2.5	80	0.30
10-H06-10	10	13.5	22.0	14.0	74.0	85.0	129.0	42.0	4.0	40	0.79
10-H06-13	13	17.0	27.0	18.5	96.0	104.0	166.0	53.5	6.7	12	1.67
10-H06-16	16	19.0	36.0	22.0	116.0	119.0	186.0	74.0	10.0	10	2.74
10-H06-20	20	25.0	44.0	23.0	133.0	146.0	225.0	87.0	16.0	6	4.72
10-H06-22	22	27.0	48.5	26.0	160.5	165.5	260.5	90.0	19.0	5	8.20
10-H06-26	26	34.0	52.0	34.0	190.0	204.0	311.0	110.0	26.5	2	11.35
10-H06-32	32	41.0	64.0	40.0	229.0	246.0	373.0	130.0	40.0	1	20.65

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	WLL lbs	Box Quantity	Mass lbs
10-H06-06	1/4	0.31	0.53	0.31	1.83	1.81	2.87	1.00	3086	100	0.33
10-H06-08	5/16	0.43	0.69	0.37	2.08	2.40	3.66	1.32	5511	80	0.66
10-H06-10	3/8	0.53	0.86	0.55	2.91	3.35	5.08	1.65	8818	40	1.74
10-H06-13	1/2	0.67	1.06	0.73	3.78	4.09	6.53	2.10	14771	12	3.68
10-H06-16	5/8	0.75	1.42	0.87	4.57	4.68	7.32	2.91	22046	10	6.04
10-H06-20	3/4	0.98	1.73	0.90	5.24	5.75	8.86	3.42	35274	6	10.40
10-H06-22	7/8	1.06	1.91	1.02	6.32	6.51	10.25	3.54	41887	5	18.07
10-H06-26	1	1.34	2.05	1.34	7.48	8.03	12.24	4.33	58422	2	25.02
10-H06-32	1-17/64	1.61	2.52	1.57	9.01	9.68	14.68	5.12	88184	1	45.52



5718 Westheimer, Suite 1000, Houston, TX, 77057