


RC T. Rex DB1 User Manual



*product colors may vary

PLEASE READ THIS MANUAL BEFORE USING.
PLEASE RETAIN THIS INFORMATION FOR FUTURE REFERENCE

DB1 Remote Control

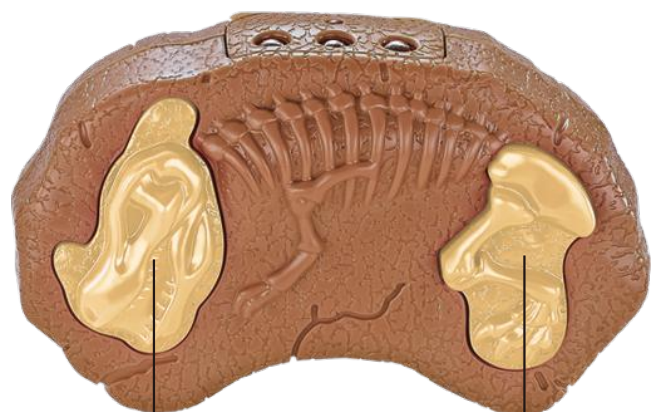

Head
Control

Movement
& Action

DB1 RC T. Rex Setup


Tail Installation

After aligning the interface, install the tail on the dinosaur from top to bottom



Dinosaur Battery Installation

Install 3*AA batteries into the dinosaur with the corresponding polarities as labeled on the unit. Then close the battery cover and tighten the screws with a screwdriver.

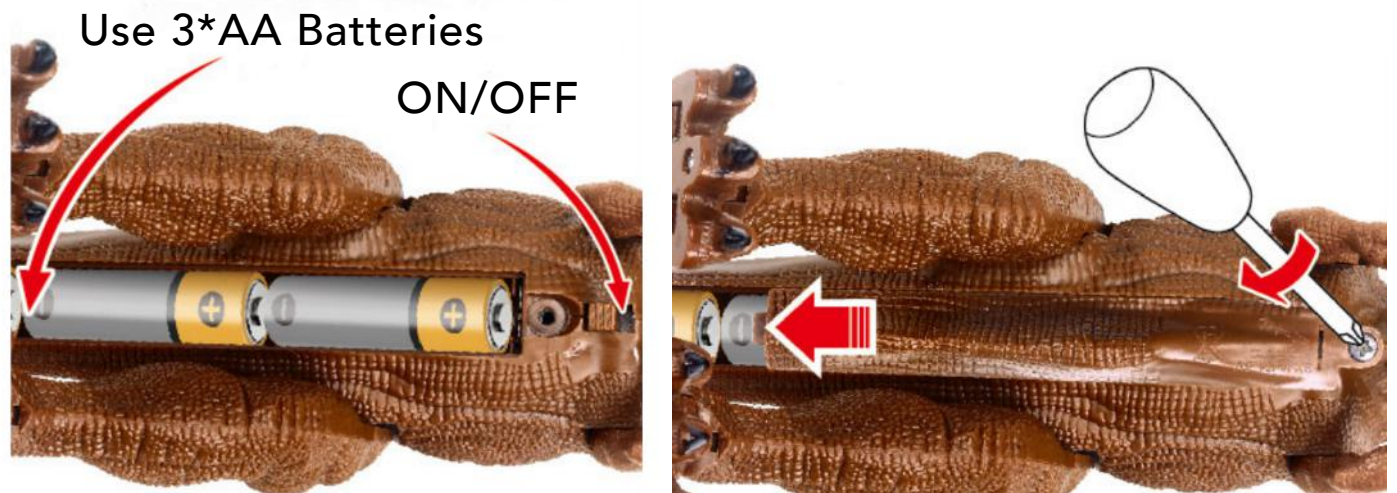

Fill Up The Smoke Chamber

Before using DB1, fill the smoke chamber with water using the included bottle. Fill the included bottle with water. Then open the lid of the head, use the included bottle to add water.





CONTACT INFORMATION

E-Mail: support@contixo.com

Website: www.contixo.com

©2021 Contixo Inc. All rights reserved. Contixo®, the Contixo logo and associated characters, trademarks and design elements are owned and licensed by Contixo Company.

Remote Battery Installation

1. Use a screwdriver to remove the battery cover.
2. Place two AA's with the corresponding polarities as labeled on the unit.
3. Replace the battery cover and screw back into place.

Battery Warnings

1. Insert batteries with correct polarity.
2. Do not mix old and new batteries.
3. Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries.
4. Rechargeable batteries are to be removed from the drone before being charged.
5. Rechargeable batteries are only to be charged under adult supervision.
6. Exhausted batteries are to be removed from the drone.
7. The supply terminals are not to be short-circuited.
8. In order to avoid battery leakage causing damage to the remote controller, please take out the battery if not in use for a long time.