

TURNED EDGE APPLIQUE

with fusible web




1. TRANSFER THE PATTERN

Trace the mirror image of the applique outline to the paper lining of the fusible web.

IMPORTANT: trace the inverted (mirror) shape to get the correct final applique orientation.

2. ATTACH FUSIBLE WEB

Cut out the traced shape from the paper backed fusible web. Place it on a back side of the fabric with the paper lining facing up. Press gently with a hot iron to fuse.

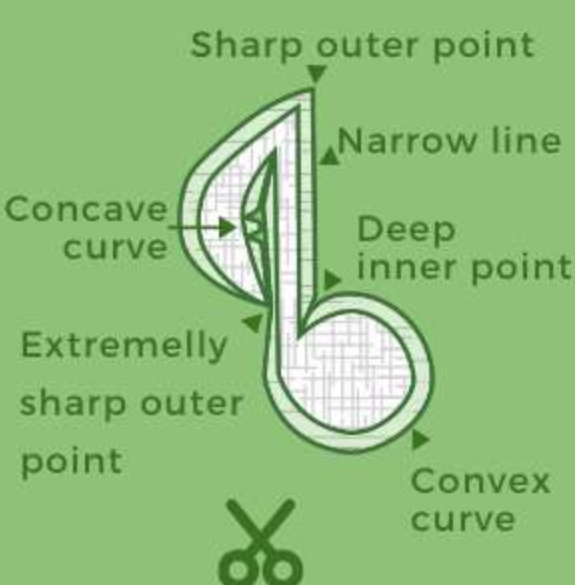

3. PREPARE THE SEAM ALLOWANCE

Cut out the shape with 1/4"-1/8" (4 - 6 mm) seam allowance. Make sure the seam allowance is thinner than the narrow parts of the applique. Cut into the seam allowance at deep points and concave curves. Trim only around extremely sharp outer points.

4. TURN THE EDGE

Fold the seam allowance over the paper lining and press with a hot iron. Remove the paper and stick the seam allowance to the back of the applique shape by pressing with the edge of a hot iron plate.



5. SEW THE APPLIQUE

Place the applique piece on the background fabric and press with a hot iron to fuse. Top stitch around the edge to attach the applique.

TIP: Sew very slowly to meet the curves.

