


SPEC SHEET: B6XPP





- Coated Surfaces:
- Thermoplastic coatedCopolymer-based,
- environmentally safeDoes not fade, crack, peel warp
- Applied at a thickness of
- Applied at a thickness of 25-30 mils.
- 5 Year warranty on coating

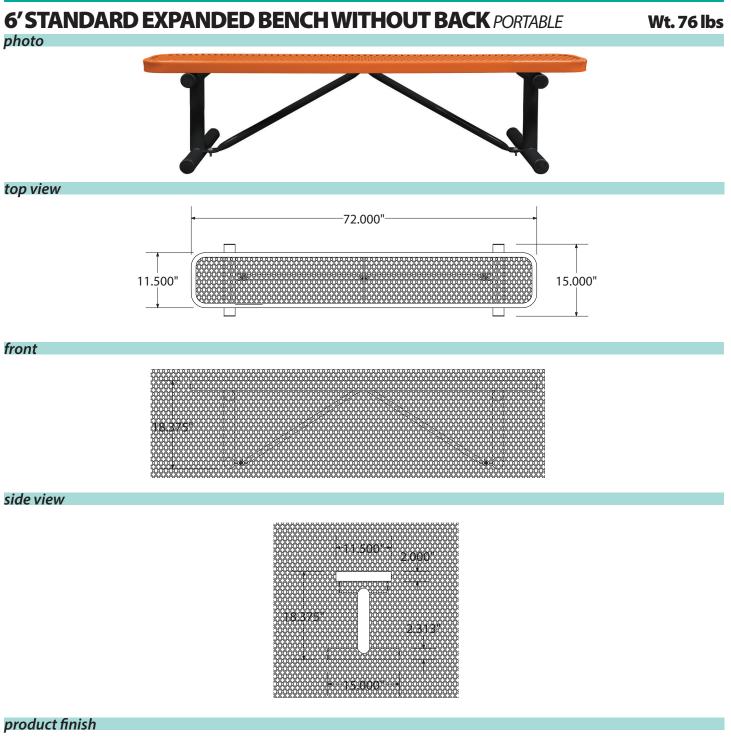

Construction:

- Seats and tops 9 gauge steel
- 2" tubular understructure
- Understructure galvanized steel
- Understructure finish black polyester powder coated
- Nuts, washers and bolts galvanized steel

mounting types

P = Portable : no mount

SM = Surface Mount: concrete anchors through discs welded to legs

IG= In-Ground: J-rods set in concete through discs welded to legs [1] or long legs with flatbar terminators set in concrete [2]

