




Turnbuckles Eye-Eye



G-6311

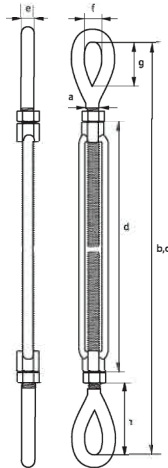

Green Pin® turnbuckles Eye - Eye generally to ASTM F1145-92

mm inch

- **Material** : drop forged high tensile steel SAE 1035 or 1045
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish** : hot dipped galvanized
- **Certification** : 2.1 2.2 3.1

working load limit	diameter thread	take up	length closed position	length open position	length	diameter	width inside	length inside	length closed position	weight each
t	a inch	inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	lbs
0.54	3/8	6	11 17/32	16 7/8	7 3/16	13/32	1/2	1 5/32	1 15/16	1.06
1	1/2	6	12 25/32	17 15/16	7 19/32	15/32	23/32	1 7/16	2 9/32	1.79
1	1/2	9	15 3/4	23 15/16	10 5/8	15/32	23/32	1 7/16	2 1/4	2.36
1	1/2	12	18 3/4	29 29/32	13 5/8	15/32	29/32	1 7/16	2 1/4	2.84
1.59	5/8	6	14 15/16	19 13/16	8	9/16	13/16	1 25/32	3 1/8	2.93
1.59	5/8	9	17 15/16	25 13/16	11 1/32	9/16	13/16	1 25/32	3 3/32	3.55
1.59	5/8	12	20 29/32	31 13/16	14	9/16	13/16	1 25/32	3 3/32	4.32
2.36	3/4	6	16 9/32	20 15/16	8 7/16	11/16	1 1/32	2 1/8	3 17/32	4.48
2.36	3/4	9	19 5/16	26 15/16	11 1/2	11/16	1 1/32	2 1/8	3 17/32	5.45
2.36	3/4	12	22 3/16	32 15/16	14 7/16	11/16	1 1/32	2 1/8	3 17/32	6.39
2.36	3/4	18	28 1/4	45	20 7/16	11/16	1 1/32	2 1/8	3 17/32	8.69
3.27	7/8	12	23 25/32	34 1/4	14 13/16	25/32	1 9/32	2 3/8	3 31/32	9.5
3.27	7/8	18	29 3/4	46 7/32	20 13/16	25/32	1 9/32	2 3/8	3 31/32	12.15
4.54	1	6	19 5/8	23 25/32	9 1/4	15/16	1 1/2	3	4 5/8	9.59
4.54	1	12	25 9/16	35 25/32	15 1/4	15/16	1 1/2	3	4 19/32	12.68
4.54	1	18	31 17/32	47 27/32	21 1/4	15/16	1 1/2	3	4 19/32	16.03
4.5	1	24	37 1/2	59 25/32	27 1/4	15/16	1 1/2	3	4 9/16	16.58
6.9	1 1/4	12	28	38 25/32	15 5/32	1 5/32	1 7/8	3 19/32	5 23/32	20.46
6.9	1 1/4	18	33 15/16	50 11/16	21 5/32	1 5/32	1 7/8	3 19/32	5 11/16	24.5
6.9	1 1/4	24	39 31/32	60 7/32	27 5/32	1 5/32	1 7/8	3 19/32	5 11/16	26.7
9.71	1 1/2	12	29 3/4	40 9/32	15 25/32	1 9/32	2 5/32	4 5/32	6 1/8	31.3
9.71	1 1/2	18	36 1/32	52 9/16	21 25/32	1 9/32	2 5/32	4 5/32	6 9/32	34.8
9.71	1 1/2	24	41 15/16	64 13/32	27 25/32	1 9/32	2 5/32	4 5/32	6 3/16	37.7
12.7	1 3/4	18	40 5/32	54 15/16	22 23/32	1 17/32	2 3/8	4 23/32	7 3/4	51
12.7	1 3/4	24	46 1/8	67 1/16	28 23/32	1 17/32	2 3/8	4 23/32	7 23/32	58
16.8	2	24	49 25/32	70 1/4	29 7/16	1 13/16	2 23/32	5 25/32	9 3/32	89.7
27.2	2 1/2	24	56 5/16	76 5/32	31 9/16	2	3 5/32	6 1/2	10 25/32	141
34	2 3/4	24	57 3/32	78 9/32	31 9/16	2 1/4	3 5/16	7	11 3/16	194

CAD

Rigging