




Turnbuckles Eye-Jaw



G-6315

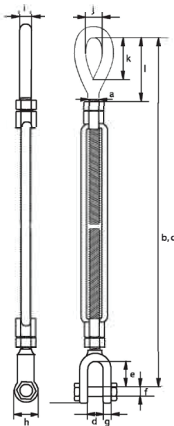

Green Pin® turnbuckles Eye - Jaw generally to ASTM F1145-92

mm inch

- **Material** : drop forged high tensile steel SAE 1035 or 1045
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish** : hot dipped galvanized
- **Certification** : 2.1 2.2 3.1
- **Note** : jaw ends up to and including 5/8" are fitted with bolts and nuts, sizes 3/4" and up are equipped with pins and cotters.

working load limit	diameter thread	take up	length closed position	length open position	opening jaw	length inside jaw	diameter pin jaw	thickness eye jaw	diameter eye jaw	diameter eye jaw	width inside eye	length inside eye	length closed position	weight each
t	a	b	c	d	e	f	g	h	i	j	k	l	l	lbs
inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	lbs
0.54	3/8	6	11 5/32	16 1/2	15/32	13/16	5/16	11/32	13/16	13/32	1/2	1 5/32	1 15/16	1.15
1	1/2	6	12 3/8	17 19/32	5/8	1 1/32	13/32	7/16	1	15/32	23/32	1 7/16	2 9/32	1.94
1	1/2	9	15 11/32	23 9/16	5/8	1 1/32	13/32	7/16	1	15/32	23/32	1 7/16	2 1/4	2.49
1	1/2	12	18 11/32	29 9/16	5/8	1 1/32	13/32	7/16	1	15/32	23/32	1 7/16	2 1/4	3.02
1.59	5/8	6	14 9/32	19 5/32	23/32	1 9/32	1/2	9/16	1 5/16	9/16	13/16	1 25/32	3 1/8	3.42
1.59	5/8	9	17 9/32	25 5/32	23/32	1 9/32	1/2	9/16	1 5/16	9/16	13/16	1 25/32	3 3/32	4.06
1.59	5/8	12	20 1/4	31 5/32	23/32	1 9/32	1/2	9/16	1 5/16	9/16	13/16	1 25/32	3 3/32	4.78
2.36	3/4	6	15 3/8	20 3/32	15/16	1 17/32	5/8	5/8	1 5/8	11/16	1 1/32	2 1/8	3 17/32	5.03
2.36	3/4	9	18 3/8	26 3/32	15/16	1 17/32	5/8	5/8	1 5/8	11/16	1 1/32	2 1/8	3 17/32	6.22
2.36	3/4	12	21 11/32	32 3/32	15/16	1 17/32	5/8	5/8	1 5/8	11/16	1 1/32	2 1/8	3 1/2	6.5
2.36	3/4	18	27 5/16	44 3/32	15/16	1 17/32	5/8	5/8	1 5/8	11/16	1 1/32	2 1/8	3 1/2	7.28
3.27	7/8	12	22 15/16	33 3/8	1 3/32	1 11/16	3/4	3/4	1 23/32	25/32	1 9/32	2 3/8	3 31/32	9.59
3.27	7/8	18	28 29/32	45 13/32	1 3/32	1 11/16	3/4	3/4	1 29/32	25/32	1 9/32	2 3/8	3 31/32	12.04
4.54	1	6	18 5/8	22 25/32	1 1/4	1 31/32	7/8	25/32	2 1/8	15/16	1 1/2	3	4 5/8	10.27
4.54	1	12	24 9/16	34 25/32	1 1/4	1 31/32	7/8	25/32	2 1/8	15/16	1 1/2	3	4 19/32	13.1
4.54	1	18	30 17/32	46 27/32	1 1/4	1 31/32	7/8	25/32	2 1/8	15/16	1 1/2	3	4 19/32	17.59
4.5	1	24	36 17/32	58 13/16	1 1/4	1 31/32	7/8	25/32	2 1/8	15/16	1 1/2	3	4 9/16	18.41
6.9	1 1/4	12	26 5/8	37 3/8	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	1 5/32	1 7/8	3 19/32	5 23/32	22.9
6.9	1 1/4	18	32 29/32	49 17/32	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	1 5/32	1 7/8	3 19/32	5 11/16	24.3
6.9	1 1/4	24	38 15/16	61 21/32	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	1 5/32	1 7/8	3 19/32	5 11/16	28.4
9.71	1 1/2	12	28 5/32	38 23/32	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	1 9/32	2 5/32	4 5/32	6 1/8	28.9
9.71	1 1/2	18	34 9/32	50 25/32	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	1 9/32	2 5/32	4 5/32	6 1/32	32.4
9.71	1 1/2	24	40 9/32	60 3/4	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	1 9/32	2 5/32	4 5/32	6 3/16	39.2
12.7	1 3/4	18	38 9/16	53 13/32	2 11/32	3 3/8	1 5/8	1 5/16	3 9/16	1 17/32	2 3/8	4 23/32	7 3/4	49.2
12.7	1 3/4	24	44 1/2	65 7/16	2 11/32	3 3/8	1 5/8	1 5/16	3 9/16	1 17/32	2 3/8	4 23/32	7 29/32	60.6
16.8	2	24	47 9/16	68 1/32	2 1/2	3 11/16	2	1 19/32	4 3/16	1 13/16	2 23/32	5 25/32	9 3/32	94.6
27.2	2 1/2	24	52 7/8	74 25/32	2 15/16	4 1/2	2 1/4	1 5/8	5 5/8	2	3 5/32	6 1/2	10 25/32	150
34	2 3/4	24	55 3/32	76 29/32	3 9/16	4 5/16	2 3/4	1 5/8	6 3/16	2 1/4	3 5/16	7	11 9/16	200

CAD

Rigging