




Turnbuckles

Jaw-Jaw

Rigging



G-6313

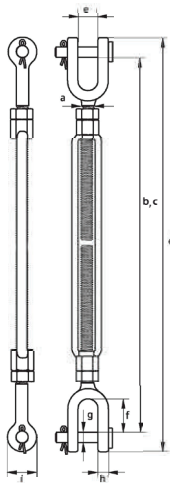

Green Pin® turnbuckles Jaw - Jaw with cotter pin generally to ASTM F1145-92

mm inch

- **Material** : drop forged high tensile steel SAE 1035 or 1045
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish** : hot dipped galvanized
- **Certification** : 2.1 2.2 3.1

working load limit	diameter thread	take up	length closed position	length open position	length closed position	opening jaw	length inside	diameter pin	thickness jaw eye	diameter jaw eye	weight each
t	a inch	inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	lbs
2.36	3/4	6	14 17/32	19 3/16	17 5/16	15/16	1 17/32	5/8	5/8	1 5/8	5.71
2.36	3/4	9	17 17/32	25 3/16	20 1/4	15/16	1 17/32	5/8	5/8	1 5/8	6.90
2.36	3/4	12	20 1/2	31 5/32	23 1/4	15/16	1 17/32	5/8	5/8	1 5/8	7.54
2.36	3/4	18	26 11/32	43 5/32	29 1/8	15/16	1 17/32	5/8	5/8	1 5/8	9.94
3.27	7/8	12	22 3/32	32 17/32	25 1/8	1 3/32	1 11/16	3/4	3/4	1 29/32	10.87
3.27	7/8	18	28 1/32	44 9/16	31 3/32	1 3/32	1 11/16	3/4	3/4	1 29/32	14.13
4.54	1	6	17 5/8	21 13/16	20 15/16	1 1/4	1 31/32	7/8	25/32	2 1/8	11.42
4.54	1	12	23 9/16	33 13/16	26 7/8	1 1/4	1 31/32	7/8	25/32	2 1/8	14.18
4.54	1	18	29 17/32	46	32 7/8	1 1/4	1 31/32	7/8	25/32	2 1/8	18.52
4.5	1	24	35 9/16	57 7/8	38 29/32	1 1/4	1 31/32	7/8	25/32	2 1/8	19.62
6.9	1 1/4	12	25 1/4	35 31/32	29 7/16	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	24.7
6.9	1 1/4	18	31 5/8	48 11/32	35 13/16	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	30.0
6.9	1 1/4	24	37 7/8	60 19/32	42 3/32	1 3/4	2 25/32	1 5/32	1 1/32	2 11/16	33.1
9.71	1 1/2	12	26 9/16	37 3/32	31 3/4	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	37.5
9.71	1 1/2	18	32 1/2	48 31/32	37 5/8	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	42.5
9.71	1 1/2	24	38 19/32	61 1/16	43 3/4	2 1/32	2 25/32	1 3/8	1 1/8	3 5/32	45.6
12.7	1 3/4	18	36 29/32	51 13/16	43	2 11/32	3 3/8	1 5/8	1 5/16	3 9/16	55.1
12.7	1 3/4	24	42 7/8	63 13/16	48 15/16	2 11/32	3 3/8	1 5/8	1 5/16	3 9/16	63.3
16.8	2	24	45 5/16	65 25/32	52 11/16	2 1/2	3 11/16	2	1 19/32	4 3/16	100.1
27.2	2 1/2	24	49 13/32	72 3/32	58 9/32	2 15/16	4 1/2	2 1/4	1 5/8	5 5/8	194.0
34	2 3/4	24	53 3/32	74 3/32	63 5/32	3 9/16	4 5/16	2 3/4	1 5/8	6 3/16	216.1

CAD