


# Hooks Self-Locking

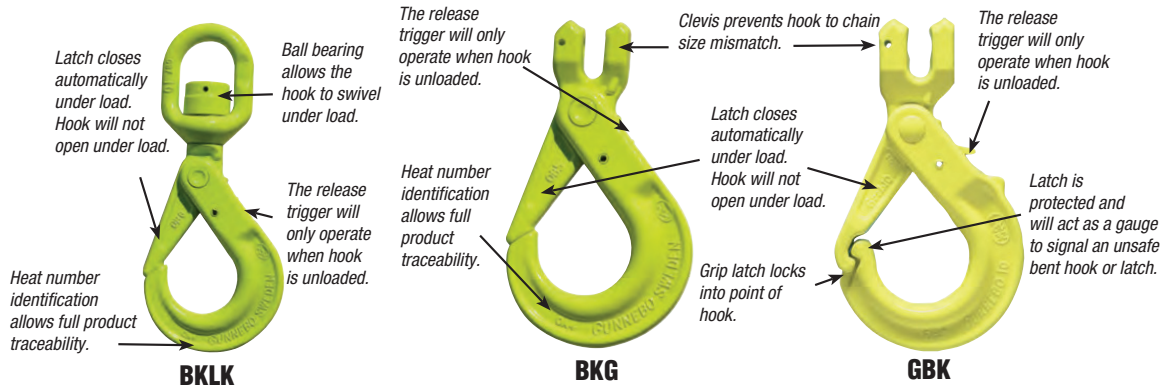


Rigging

## SELF-LOCKING HOOKS - BCLK WITH BALL BEARINGS (SWIVEL EYE TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
					L	B	C	E	F	G	H	
590121	BCLK-6-10	7/32"	100	2,700	5.9	1.1	0.94	1.3	0.43	0.59	0.83	1.5
590123	BCLK-7/8-10	9/32"	100	4,300	7.2	1.5	1.1	1.5	0.47	0.67	1.0	2.6
590123	BCLK-7/8-10	5/16"	100	5,700	7.2	1.5	1.1	1.5	0.47	0.67	1.0	2.6
590125	BCLK-10-10	3/8"	100	8,800	8.6	1.7	1.4	1.7	0.59	0.83	1.2	4.2
590126	BCLK-13-10	1/2"	100	15,000	11.1	2.1	1.8	1.9	0.75	1.2	1.5	8.4
590127	BCLK-16-10	5/8"	100	22,600	13.3	2.5	2.5	2.4	0.87	1.5	1.9	15.9
590128	BCLK-18/20-10	3/4"	100	35,300	14.4	2.7	2.3	2.9	1.0	1.7	2.5	24.9
590129	BCLK-22-10	7/8"	100	42,700	17.2	3.1	3.1	3.1	1.4	2.0	2.4	37.0
590130	BCLK-26-10 OFFS **	1"	100	59,700	19.1	3.9	4.3	4.0	1.8	2.1	2.7	57.3
590480	BCLK-32-8 OFFS **	1 1/4"	80	72,300	21.0	4.7	4.3	4.0	1.8	2.4	3.4	71.2


\* Design Factor 4:1 Proof tested and certified  
\*\* DNV 2.7.1 Type Approval

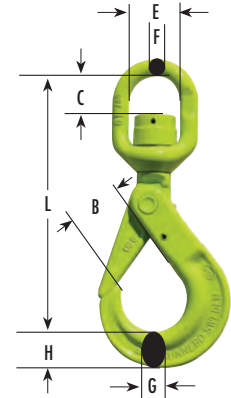

## SELF-LOCKING HOOKS - BKG (CLEVIS TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)				Weight Each (Lbs.)
					L	B	G	H	
590084	BKG-7-10	9/32"	100	4,300	4.7	1.5	0.67	0.98	1.8
590086	BKG-8-10	5/16"	100	5,700	4.8	1.5	0.67	1.0	2.0
590087	BKG-10-10	3/8"	100	8,800	5.6	1.8	0.83	1.2	3.3
590088	BKG-13-10	1/2"	100	15,000	7.1	2.1	1.2	1.5	6.6
590089	BKG-16-10	5/8"	100	22,600	8.9	2.4	1.5	1.9	12.6
590091	BKG-20-10	3/4"	100	35,300	9.4	2.9	1.7	2.5	21.2


\* Design Factor 4:1 Proof tested and certified.



## SELF-LOCKING HOOKS - GBK WITH GRIP LATCH (CLEVIS TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)				Weight Each (Lbs.)
					L	B	G	H	
589737	GBK-7-10	9/32"	100	4,300	4.7	1.5	0.79	0.87	1.8
589739	GBK-8-10	5/16"	100	5,700	4.7	1.5	0.79	0.87	1.8
589740	GBK-10-10	3/8"	100	8,800	5.9	1.9	0.83	1.2	3.1
589741	GBK-13-10	1/2"	100	15,000	6.8	2.1	1.2	1.5	6.0
589742	GBK-16-10	5/8"	100	22,600	8.1	2.4	1.5	1.9	9.7

\* Design Factor 4:1 Proof tested and certified.



SEE WARNINGS AND USE LIMITATIONS ON PAGES 26-36