

# HYDRA KOOL



**PULL OUT  
CONDENSING UNIT  
ON SELF CONTAINED**



**DIGITAL  
CONTROLLER**


## OPEN FRONT DELI CASE

**MEDIUM TEMPERATURE  
TEMPERED FRONT GLASS  
DESIGNED FOR DELI PRODUCTS  
FRESH AND PACKAGED MEAT**

### MODELS

**KFM - OF - (40,50,60,80,100,120) - S**

**KFM - OF - (40,50,60,80,100,120) - R**



**REMOTE AND SELF CONTAINED  
404A REF - FORCED AIR REFRIGERATION**

**ALTERNATE REFRIGERANTS AVAILABLE BY SPECIAL ORDER**

IN COMPLIANCE  
WITH  
NATIONAL  
ENERGY  
STANDARDS



5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832

12000 Biscayne Blvd., Suite #108  
Miami, FL, United States 33181  
Telephone: 786.600.4687 / Toll Free 844.218.8477  
Fax: 786.661.4100


Email: [sales@mvpgroupcorp.com](mailto:sales@mvpgroupcorp.com)

SELF CONTAINED	MODEL	O.A. LENGTH INCHES	VOLUME FT <sup>3</sup>	CASE TEMP	ELECTRICAL - 115 VOLTS						WEIGHT LBS.		CRATE SIZE			
					COMPRESSOR			FANS	EVAP PAN	TOTAL AMPS	NEMA 115V PLUG	NO CRATE	WITH CRATE			
					H.P.	F.L.A.	L.R.A.							"L"	"W"	"H"
	KFM-OF-40-S	40-3/8	6.07	32/40F	3/8	8.4	43	.65	3.3	12.38	5-15P	129	445	48	44	42
	KFM-OF-50-S	52-1/8	8.00	32/40F	1/2	9.6	49	.65	3.3	13.58	5-15P	146	505	60	44	42
	KFM-OF-60-S	60	9.29	32/40F	1/2	9.6	49	.75	3.3	13.68	5-15P	166	564	67	44	42
	KFM-OF-80-S	77-1/2	12.15	32/40F	5/8	8.9	47	1.20	3.3	13.43	5-15P	205	714	85	44	42
	KFM-OF-100-S	101-1/8	16.00	32/40F	3/4	16	64	1.30	3.3	20.63	N/R	257	844	109	44	42
	KFM-OF-120-S	117	18.58	32/40F	3/4	16	64	1.40	3.3	20.73	N/R	309	1053	124	44	42

REMOTE	MODEL	O.A. LENGTH INCHES	CASE TEMP	115 VOLTS TOTAL AMPS	B.T.U.	WEIGHT LBS.	
						NO CRATE	WITH CRATE
	KFM-OF-40-R	40-3/8	32/40F	.20	2194	229	390
	KFM-OF-50-R	52-1/8	32/40F	.20	2859	267	450
	KFM-OF-60-R	60	32/40F	.30	3260	311	509
	KFM-OF-80-R	77-1/2	32/40F	.30	4209	419	681
	KFM-OF-100-R	101-1/8	32/40F	.40	4845	511	789
	KFM-OF-120-R	117	32/40F	.50	6357	615	988

**NOTE**

- THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT
- LENGTH INCLUDES (2) ENDS AT 1-1/2" EACH
- B.T.U.'S CALCULATED AT +14°F AND 90°F AMBIENT CASES ENGINEERED TO OPERATE AT 75°F AND 55% RH
- ON REMOTE CASES - IF NO FLOOR DRAIN IS PROVIDED- AN EVAPORATIVE PAN MUST BE ORDERED AND 3.3AMPS ADDED TO THE AMP LOAD
- REMOTE CASES PROVIDED WITH EXPANSION VALVE AND LIQUID SOLENOID FOR PUMPDOWN CYCLE
- REMOTE CASES ARE HARD WIRED - NO PLUGS

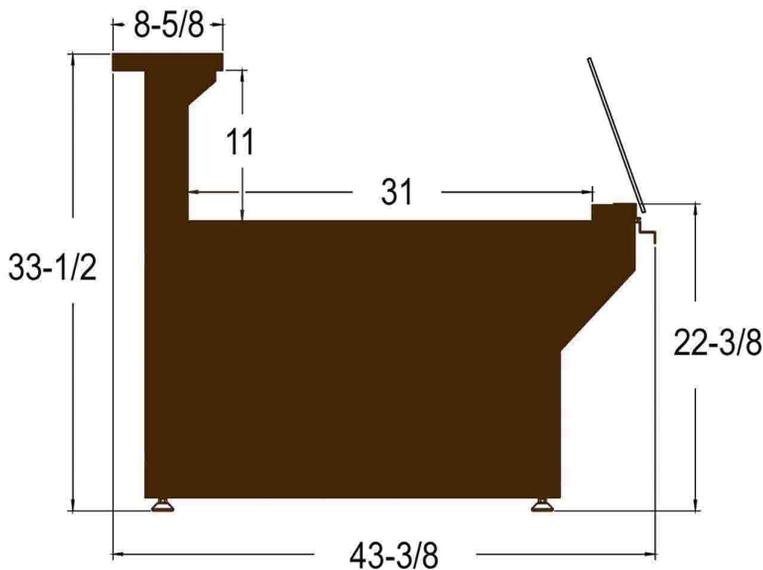

**STANDARD FEATURES**

- INSULATION - INJECTED FOAM
- INTERIOR - PVC COATED STEEL-GRAY
- EXTERIOR - PVC COATED STEEL-SILVER
- ENDS-FOAMED -BLACK POLYSTYRENE
- CASES ARE MULTIPLEXIBLE
- PULL-OUT CONDENSING UNIT - ON S/C ONLY
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7
- THESE CASES COMPLY WITH THE NATIONAL ENERGY STANDARDS

**OPTIONAL FEATURES**

- CASTERS - ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS- FROM 5-1/8" TO 7-5/8"
- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- EVAPORATIVE PAN FOR REMOTE CASES
- WHITE APOXY BI-LEVEL WIRE RACKS
- SCALE STAND WITH RECEPTACLE
- CUTTING BOARD
- (2) OR (3) LEVEL STEP SHAM
- KNIFE SUPPORT

**WARRANTY**

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)