
Diagrams

Appliance and Cabinet Dimensions



23 - 5/8" (600 mm) min. 24" (610 mm) max. The power cord exits the rear of the appliance at this location.

Height when adjustable feet have been screwed Free length of the power cord in as far as they will go.


Delivery status = feet approx. 1/8" unscrewed.


(

Maximum height adjustment = 2" (51 mm) to allow for a 6" (153 mm) toe kick.

= 78 - 3/4 inch (2000 mm)


The electrical outlet must not be situated behind the appliance and must be easily accessible.

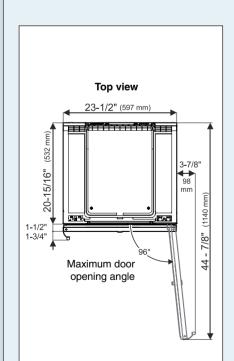




The floor on which the appliance stands must be horizontal and level. The kitchen units must be aligned horizontally and vertically.

Mounting the panel onto the angle bracket

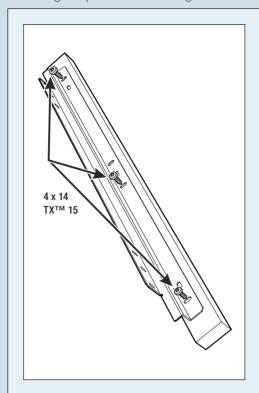

Mount the panel onto the angle bracket using three 4 x 14 screws.

Appliance Venting

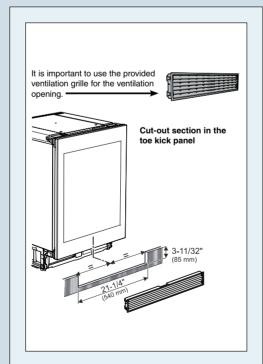

The cut-out section in the toe kick panel must be centered in relation to the appliance and in the uppermost part of the toe kick.





Quality, Design and Innovation



Features

safeguarding your precious wine. Enjoy a top-quality wine experience before you even



Wine Cabinet

select a bottle.

Capacity
Total capacity cu.ft. (I)
Max. No. of Bordeaux btls 0.75 I
Shipping weight lbs. (kg)
Climate rating
Sound rating dB(A)
Door hinges
Product dimensions
in inches (cm) H/W/D
Cut out dimensions
in inches (cm) H /W/D
Energy supply
Voltage V/Hz
ADA compliant

123.3 (30)
SN-ST
39**
right, reversible
32 1/4" / 23 9/16" / 22 11/16" (81.8 / 59.7 / 57.5)
32-5/16"/34-5/16"/23-5/8"/22-7/8" (82-87/60/58)
115/60
Yes

3.3 (94)

123 5 (56)

34



German Engineering: Our superior products offer premium quality, cutting edge design and innovative features that fit your busy lifestyle. Exclusive components and materials, along with the latest production processes, ensure energy efficiency and performance for years to come.



SoftSystem: Unique to Liebherr is our patented SoftSystem, often used in high-end cabinetry, ensures that the door closes gently, even when fully loaded. Plus the door opening angle can be reduced to 90 degrees allowing for more design options within kitchen décor.



LED Lighting: The energy efficient LED ceiling light not only emits virtually no heat, but it is dimmable to cast a cool glow to give a pleasing ambient light inside the appliance as well as the room.



Electronic LCD display: Intuitive navigation of touch electronic control system enables tailored storage options. The digital temperature display can be viewed via the UV tinted glass door.



Beech wood Shelving: Solid beech wood shelves on telescopic rails for easy wine access.



FreshAir Activated Charcoal Filter: Liebherr wine cabinets are fitted with easy-to-replace FreshAir activated charcoal filters to ensure clean air. Odors are filtered out and the quality of the wine is protected.



TipOpen technology: When the glass door is gently tapped, TipOpen technology partially opens the unit, facilitating further opening. If the door is not opened fully within three seconds, the door will self-close, ensuring that the ideal air humidity does not escape from the cabinet.



UV Protection: In order to minimize the exposure of light which can damage the maturity of a wine, Liebherr wine cabinets are fitted with special UV-resistant insulated glass; simultaneously protecting and presenting your wine.



Alarm System: Liebherr Wine units are equipped with a trustworthy alarm system to alert the homeowner if the door has been left open or the temperature has been compromised.



^{*} Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 12 cents per KWh.

^{**} Noise output – according to EN 60704-3