



MODELS

KFM-CG-(40, 50, 60, 80, 100, 120)-S
KFM-CG-(40, 50, 60, 80, 100, 120)-R

CURVED GLASS DELI CASE
DESIGNED FOR FRESH MEAT

Case holds 33°F to 40°F • Low velocity forced air refrigeration maintains high humidity • Tempered tilt-out curved front glass • Tempered side glass and rear sliding doors • Cases can be multiplexed



SELF CONTAINED	Model	O.A. Length Inches	Volume FT ³	Electrical - 115 volts						NEMA 115V Plug	Weight LBS.		Crate Size		
				Compressor			Lights, Fans,	Evap Pan	Total Amps		No Crate	With Crate	W	L	H
				H.P.	F.L.A.	L.R.A.									
	KFM-CG-40-S	40-3/8	12.35	3/8	8.4	43	0.95	3.3	12.68	5-15P	333	494	48	44	42
	KFM-CG-50-S	52-1/8	16.27	1/2	9.6	49	0.96	3.3	13.89	5-15P	377	560	59	44	42
	KFM-CG-60-S	60	18.88	1/2	9.6	49	1.08	3.3	14.01	5-15P	427	626	67	44	42
	KFM-CG-80-S	77-1/2	24.70	5/8	8.9	47	1.68	3.3	13.91	5-15P	531	794	85	44	42
	KFM-CG-100-S	101-1/8	32.54	3/4	16	64	1.81	3.3	21.14	N/A	658	937	109	44	42
	KFM-CG-120-S	117	37.76	3/4	16	64	2.06	3.3	21.39	N/A	785	1160	124	44	42

REMOTE	Model	O.A. Length Inches	115 Volts Total Amps	B.T.U.	Weight LBS.	
					No Crate	With Crate
	KFM-CG-40-R	40-3/8	0.5	2548	278	439
	KFM-CG-50-R	52-1/8	0.51	3015	322	505
	KFM-CG-60-R	60	0.63	3159	373	571
	KFM-CG-80-R	77-1/2	0.78	4345	498	761
	KFM-CG-100-R	101-1/8	0.91	5112	604	882
	KFM-CG-120-R	117	1.16	5472	721	1093

STANDARD FEATURES


- Insulation-CFC free injected foam
- Stainless steel interior
- Silver colored PVC coated steel front panel with black steel kick plate
- Foamed polystyrene black end panels
- Tempered tilt-forward front glass
- Removable rear tempered glass sliding doors
- LED lighting in canopy
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporative pan for easy cleaning on S/C only
- Slide out condensing unit on S/C only
- Anti-condensate system for front glass
- Digital thermometer
- Levelling feet

OPTIONAL FEATURES

- Lift-up front glass
- Stainless steel exterior
- Other colors available
- White epoxy bi-level wire racks
- (2) or (3) level step sham
- Scale stand with receptacle
- Cutting board
- Knife support
- Condensate evaporative pan for remote cases
- Casters-add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

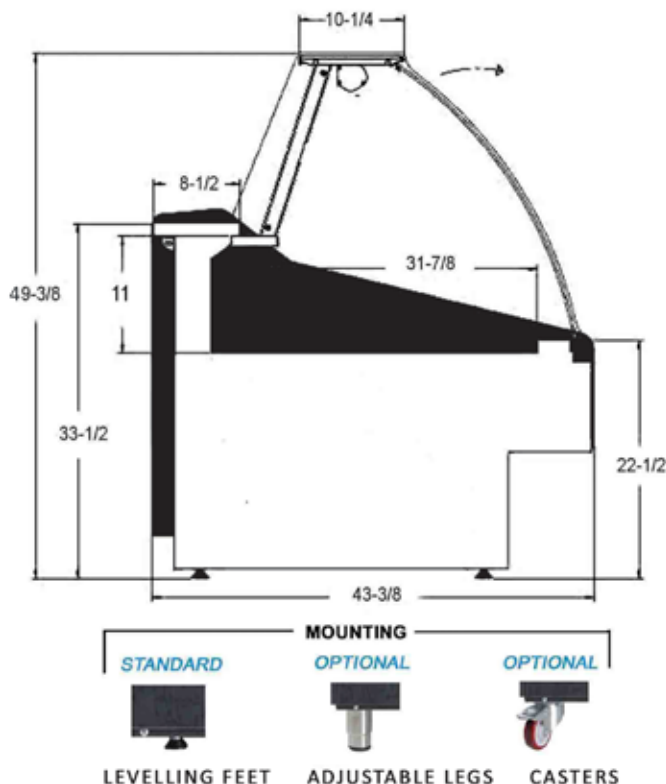

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

USA Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

Canada Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com